

DCP007

Process Photometer

Benefits:

- Maintenance free
- High performance LED light source
- Real time in-line measurement
- Dual wavelength drift free operation
- Light source & wavelength easy to change
- Modbus TCP Ethernet data communication


The Kemtrak DCP007 process analyzer is a high performance fiber optic coupled photometer for high resolution, real time, in-line concentration and color measurement. Modern LED light source technology ensures maintenance and drift free operation with exceptionally high precision.

Industrial grade measurement cells with scratch resistant sapphire windows, contain no electronics or moving parts making them ideal for both ordinary and hazardous area use. A validation & calibration accessory traceable to NIST standards is available to assure measurement confidence while saving valuable time and resources.



Integrated NIST validation accessory

Standard features include 16 linearization tables for multiple product switching, remote zeroing, automatic cell cleaning cycle and signal filtering. A built-in graphical internet based interface allows remote operation, calibration, validation and data trending using a standard web browser.

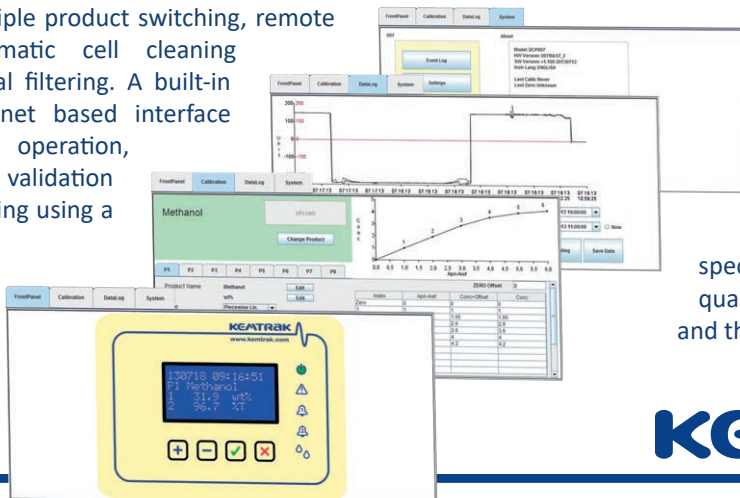

Typical Applications:

- Color Scales
 - Platinum Cobalt / APHA / Hazen
 - ASTM D-1500
 - Saybolt / ASTM D-156
 - ICUMSA
- Chemical concentration
 - Chlorine Dioxide, Hypochlorite, Chlorine
 - Metal ions *e.g. iron, copper, chromium, cobalt*
 - Aromatics & Hydrocarbons
- Leak, carryover & interface detection

Dual wavelength operation automatically compensates for sample turbidity and/or fouling of the optical windows. Four channel measurement technology ensures drift and trouble free operation.

All Kemtrak products are designed to meet the most demanding application specifications and are made from the highest quality materials to ensure exceptionally long life and the highest reliability possible.

KEMTRAK

www.kemtrak.com

Housing

Stainless steel EN 1.4301 (X5CrNi18-10), AISI 304 (V2A)
Captive lid screws & external mounting brackets stainless steel
244 x 215 x 105 mm (L x W x D)
IP 65 / EN 60529

Display

16 x 4 alphanumeric white on blue dot matrix LCD display
LED background illuminated
Measurement updates every second
LED 1 (green): Power on
LED 2 (red): System fault
LED 3 & 4 (orange): Alarm 1 & Alarm 2
LED 5 (blue): Clean / Hold

Operation

4 push buttons
Remote HTML/Java interface (TCP/IP connection via Ethernet port)

Software Features:

- Auto gain: Fully automatic photometer gain switching
- Auto zero: Automatically, locally or remotely activated zero
- Calibration: 16 linearization tables for concentration & mA output
- Damping: From 0 to 9999s with noise (air bubble / particle) filter
- Memory: Nonvolatile - all data retained upon power failure
- Security: Alphanumeric password protection

Data Logger

- >17000 data points (timestamp, average, max. & min.), ring buffer
- Configurable log time interval 1s to 24hr

Event Logger

- > 16000 events, ring buffer
- Timestamp, alarms, zeroing, cleaning, product change, calibration & system events (power, system warning & error messages)

Automatic Cleaning Control

- Automatic cleaning sequence, triggering dedicated relay output
- Manual trigger or external trigger via digital input
- Configurable automatic cleaning interval, 15min to 2months
- Configurable cleaning duration from 0 to 9999s
- Auto-zero after clean option
- Hold value after clean (to equilibrate) 0 to 9999s

PID Controller

Control method: Pulse width modulated relay output or 0/4-20mA output
Control period: 2 - 99s
Proportional gain: 0.0000 - 999999
Integral time: 0.0000 - 999999s
Derivative time: 0.0000 - 999999s

Remote Input

- 5 x Digital input (potential free contact) for:
- Input 1-3: Product/range selection
 - Input 4: Zero, instant zero, clean or clean & Zero
 - Input 5: Hold (freeze output), data log control or light source control

Analogue Input (optional)

mA or 3-wire PT100
Range: -20 to 200°C (-4 to 392°F)
Resolution: 0.07°C (0.126°F)

Light Source

High performance light emitting diode (LED)
Wavelength range: 350 - 1050 nm
Full Width-Half Maximum (FWHM): 10 nm
Central Wavelength (CWL) Accuracy: ±1 nm
Typical lamp lifetime: >100000 hrs
*Note: Measurement wavelengths must be factory installed.
Typical specifications provided for 500 nm*

Photometric Range

0.000 - 5 AU at 500nm, 10 mm OPL

Photometric Accuracy

±0.001 AU at 1 AU

Photometric Noise

±0.0001 AU at 1 AU

Linearity

± 0.5% of respective measuring range

mA Output

1 x selectable 0 - 20mA / 4 - 20mA (NAMUR, max 21.6mA)
Optional second mA output
Galvanically isolated, tested during final inspection to 500 VDC
Accuracy: < 0.1%
Resolution: 0.025%
Load: 0 - 600 Ohm

Relay Outputs

1 x 1 A 240VAC Failsafe output (active when system is ok)
2 x 1 A 240VAC User configurable (alarm, PID)
1 x 1 A 240VAC Automatic cleaning control
Fuses: 4 x 1 A (type: MXT), max 100A breaking capacity
LED status indicators flash when relays are active

Fail-Safe:

Dedicated relay output, 1A 240 VAC
mA output value used to signal a system fault (NAMUR <3.6mA or >21.0mA)

Network interface (remote communications):

TCP/IP, 10Base-T and 100Base-TX Link
Connector: RJ45
Protocol:
1) HTML/Java interface using native protocol over TCP/IP
Software: Web browser with Java version 6 or later
2) MODBUS server (slave) over TCP/IP (V1.1b3 compliant)
Functions: (0x03, 0x04, 0x2B/0x0E - conformity 0x01)

Operating Conditions

Ambient temperature: 0°C to +50°C (32°F to 122°F)
Transport: -20°C to +70°C (-4°F to 158°F)

Power Supply

100-240 VAC, 50-60Hz & 22 - 30VAC/VDC
Mains fuse: 1 A (type MST), Max breaking capacity 35A

Power Consumption

25 VA (max.)

Certificates

CE, ISO 9001:2015, IECEx,
ATEX Ex d IIB + H2 T5 IP66 Category Ⓢ II 2 G,
UL Class I Division I & II Gas Groups B,C,D,
UL Class II Groups E,F,G and Class III,
NEMA 479

Flow Cells and Process Connections

Standard designs include DIN Flange (DIN 2633), ANSI (ASME B16.5), Tri-Clamp® (ISO 2852 & DIN 32676), Straight pipe thread (DIN ISO 228 BSP), NPT tapered pipe thread (ANSI B 1.20.1), single use barbed
Line size up to DN200 / 8"

Materials

Standard material stainless steel 316L (EN 1.4435 or EN 1.4404)
Other materials include Titanium Gr 2, Hastelloy C-276 & C-22, Monel 400 & PTFE C25 (TFMC, carbon filled Teflon®), PPSU

Window

Sapphire, UV fused silica

Surface Finish

Ra <0.38 µm (electropolishing available on hygienic measurement cells)

Elastomers

FPM (FKM/Viton®), FFKM (Chemraz®/Kalrez®, FDA), EPDM (FDA)

Operating Conditions

Ambient & process temperatures up to 275°C (527°F)
Process pressure from 10mbar to 200 bar (0,14 - 2900psi)
Operating conditions subject to material and design in use

Fibre Optic cable

Silica core photonic fiber with Kevlar® reinforced flexible
LZSH coated stainless steel jacket
Fully-interlocked stainless steel conduit for use above 85°C (185°F)
Terminated with SMA 905 connectors.
Lengths up to 100m (328foot)

NIST-Traceability

NIST-traceable validation accessory (option)

Protection

IP66 / EN 60529



Kemtrak AB • SE 187 66 Stockholm • Sweden
sales@kemtrak.com • www.kemtrak.com

*We reserve the right to make changes
without prior notice*

Distributor

*Kemtrak is a leading manufacturer of fiber optic measuring and automation products for the process engineering industry.
Kemtrak provides tailor made solutions to meet the needs of a wide range of industries including chemical, petrochemical & offshore,
biotech, pharmaceutical, food & beverage, pulp and paper and water & environment.
Kemtrak has trained representatives and support personnel globally and is certified according to ISO 9001:2015.*