

$\begin{array}{l} \mbox{Economical solutions for} \\ \mbox{your NO}_x \mbox{ concentrations.} \end{array}$

You search for accurate NO_x measurements – ECO PHYSICS provides a cost-effective solution. With over 15 years of experience in Duernten, in the foothills of the Alps near Zurich, we have the right solution within our broad range of CLD analyzers for you. Just ask us!



CLD 60 Series

The cost-effective range of products, which offers the best price/performance ratio for you: Swiss quality at an affordable price.



operation, these reliable

analyzers are here to stay.

Our performance record is

unequaled.

CLD 800 Series The flexible range of products: The most versatile range of analyzers allows you to configure your analyzer to your needs. Your choices are almost limitless!

Economical, reliable, precise.



ECO PHYSICS AG · BUBIKONERSTRASSE 45 · CH-8635 DUERNTEN · TEL. +41 55 220 22 22 · FAX +41 55 220 22 55 · INFO@ECOPHYSICS.COM WWW.ECOPHYSICS.COM





Economical, reliable, precise.



Our analyzers detect nitrogen oxides at any concentration.

Many scientists, technicians and engineers depend on the NO_x readings from their ECO PHYSICS analyzers. Many more would like to - now they have a choice: The cost-effective CLD 60 series. The simplified setup makes it easy for every system integrator.

Applications	CLD 62	CLD 64	CLD 66
Stack emissions Burner and boilers Waste incineration Energy production and turbines Petrochemical plants			
Quality control in production DeNO _x devices Ambient monitoring Chemical and high-tech industries		•	•
Indoor NO2 measurements Clean-room surveillance Research in plant physiology Biomedical and pharmaceutical research laboratories		•	• • •
			/


User friendliness

priority in the development of an ECO PHYSICS analyzer. The instrument of- to its basic components. All the heated fers predefined settings to facilitate parts are combined and include even user operation, which can be per- the efficient thermal ozone scrubber. formed by means of the integrated Ozone generation does not require a keypad or remotely from a personal special gas supply, it just takes normal computer. The clear layout of the menu clean ambient air. The compact reacstructure guides the user and enables tion chamber is the heart of the anahim to take advantage of all analyzer lyzer. All these high-quality components a few options available, the analyzer operation. Apart from expendable can be tailored to your needs.

Basics reduced to the optimum

User comfort has always been a top Each CLD series 60 analyzer optimizes the chemiluminescence detector (CLD) functions with simple commands. With guarantee a nearly maintenance-free material for sampling purposes, service is limited to the yearly replacement of filters and membranes.

Swiss Precision Featuring

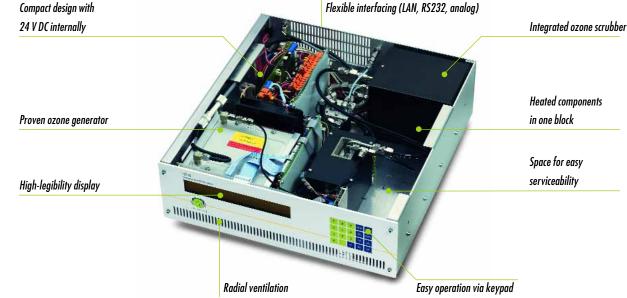

A fascinating technology

The analyzers of the CLD 60 series are produced in accordance with the ISO not only state-of-the-art products in terms of precision and reliability. Their ty product with excellent support after technological base also sets the trend the sale is insured. for others. The principle of chemiluminescence detection is an extremely selective method for measuring nitrogen oxides precisely, with high linearity over a wide concentration range and with very high reproducibility. These qualities are the basis for the acknowledged high performance of ECO PHYSICS CLD NO_x analyzers in tracking nitrogen oxides even down to the low ppt level.

pass an extensive test procedure be- sumes only three height units from your fore it leaves the factory. These per- rack. The state-of-the-art interfacing formance tests can be recalled for capabilities like LAN, RS 232 and anaevery analyzer that ever left our log enable flexible data transfer.



manufacturing plant. Designed and 9001:2000 certification, a high-quali-



All CLD 60 analyzers can be supplied with slides for rack mounting

Easy to integrate

Integrating the analyzer in larger sys-The ECO PHYSICS quality assurance tems is easy. With its radial ventilation Each and every NOx instrument must concept the compact instrument con-

big in performance.