



ANKERSMID
Sampling

ANKERSMID Gas sampling and conditioning equipment

Product catalogue





ANKERSMID Gas sampling and conditioning equipment

Range of products

Chapter	Subject	Information	
1	Heated or unheated gas sampling probes	ASP	Sample probes, unheated and heated versions up to 200°C or 320°C with internal and/or external filters, Various versions for safe and hazardous (Ex-) areas
		APP	Portable sample probes, heated version up to 180°C
		AET	Extension tubes for sample probes
		AST	Sample tubes (heated & unheated) for sample probes
		ADT	Demister tubes for sample probes
		ATF	Top / Pre-filters for sample probes
		AAS	Abrasive shield for top / pre-filter
2	Heated sample lines and controller	AHL	Custom made heated sample lines made of PTFE or SS, self-limited or regulated, heated up to 120/200/250°C
		ATC	Temperature controller
3	Gas cooler	ACC	Compressor coolers with different heat exchangers
		APC	Peltier coolers with different heat exchangers
		AAC	Ambient pre-coolers
	Condensate removal	ACS	Condensate separator
		ALD	Liquid drain
		ACV	Condensate vessel
	Alarm sensor	ALA	Liquid sensors on different principals, alarm and electronic units
4	Filter	AUF	Wide range of universal filters made of different materials like PTFE, PVDF, SS. Various filter elements: Ceramics, PTFE, glass-fiber, SS
		AAM	Refillable adsorption material filters
		AAF	Ambient air suction filters
		AHU	Humidifiers
		AWB	Wash bottles
		AFP	Fluid particle filters; for catching & retract aerosols
		APF	Panel filters
		ALS	Liquid stops to protect analysers or moisture-sensible apparatus
		AHF	Heated filter
5	Flow meter	AFM	Flow meter
6	Pumps	ACP	Peristaltic pumps for condensate removal
		AMP	Membrane pumps with different flows, pressures, materials (PTFE, PVDF, PPS or SS), Various versions for safe and hazardous (Ex-) areas
7	Gas converter	AOX	NO-NO ₂ gas converter
8	Connectors fittings valves	ACF	Connectors, fittings, valves made of PVDF/PTFE
		PBV	SS Ball-valves
		PNV	SS Needle valves
		PCV	SS Check valves
		PFI	SS Fittings Inches
		PFM	SS Fittings Metric
		PPF	SS Pipe fittings
		PRV	SS Gouge root valves
PVM	SS Manifold valves		
9	Gas conditioning systems	APS	Portable gas conditioning system
		ADS	Compact Digital PLC-controlled gas conditioning System in 19"-rack version
		ASS	Stationary gas conditioning system
		ATD	Touchscreen PLC-controller



ANKERSMID Gas sampling and conditioning equipment

Information on Delivery Times for Standard Products

With these standard delivery time indications you can simplify your quotations.

Indication of delivery times in weeks after receipt of order and complete clarification of all commercial and technical issues.

Validity only for small quantities and are submit to possible changes due to sudden over sales.

Chapter	Subject		Delivery time [weeks]
1	Heated or unheated gas sampling probes	ASP	2-4
		ASP Ex	8
		APP	3
		AET	2
		AST	Unheated: 2 / heated: 4
		ADT	2
		ATF	2
		AAS	2
2	Heated sample lines and controller	AHL	2-3
		ATC	2-3
3	Gas Cooler	ACC	2-3
		APC	2-3
		AAC	2
	Condensate removal	ACS	2
		ALD	2
		ACV	2
Alarm sensor	ALA	2	
4	Filter	AUF	2
		AAM	2
		AAF	2
		AHU	2
		AWB	2
		AFP	2
		APF	2
		ALS	2
AHF	2-4		
5	Flow meter	AFM	2
6	Pumps	ACP	2
		AMP	2
7	Gas converter	AOX	3
8	Connectors, fittings, valves	ACF	2 (depending on stock)
		PBV	4
		PNV	4
		PCV	4
		PFI	4
		PFM	4
		PPF	4
		PRV	4
PVM	4		
9	Gas conditioning systems	APS	2-4
		ADS	4-6
		ASS	2-4
		ATD	3



ANKERSMID Gas sampling and conditioning equipment

International Reference List

(Gas sample probes, cooler, filter, customized analytical systems)

Umicore	LISEC
Bayer	CBR Antoining
Servaco N.V.	ISSEP
Sadaci	ACV
Aquafin leuven	R.A.S.
KVBG	Ineos Manufacturing
BASF	Sadaci
Tame Tech International Co Ltd.	Clean Air Europe S.A.
Solvay	Tessengerlo Chemie
Distrigas	3M
SGS	Envirotox
Kronos Europe	KVBG
Dupont de Nemours	Kabelwerk Eupen
Aquafin Aartselaar	Envitec
Compagnie des Ciments Belges	CVSD Vandamme
Siemens	Sappi Lanaken
Highseas General Trading Co	BEP
Monsanto Europe	Electrabel - Centrale van Schelle
WFR Gent	Metallo Chimique
Medisoft	Air Products
Tauw België	Aquafin leuven
Servaco N.V.	Breva Beringen
Ciments d`Obourg	ENMO België
Fisher Rosemount	CBR
Monsanto Europe	Chevron Philips Chemicals
Dräger Safety	Electrabel
Arcelor	CW Technics
Mactac Europe S.A.	De hobbit
Compur Monitors	Campine Recycling
Laborelec	ERDA
Bodart & Gonay	Runetech
Duracell Batteries	BP
Evonik Degussa	INBEV
Borealis	Twinterg



ANKERSMID Gas sampling and conditioning equipment

Subsidiaries

Belgium /Luxembourg

Ankersmid Sampling BVBA - Manufacturer

Neerlandweg 21
2610 Wilrijk
Tel: +32 3 820 80 02
Fax: +32 3 230 98 58
E-mail: info@ankersmidsampling.com

China

Ankersmid China

Zao Fong Universe Building Suite 5F1
1800 Zhongshan Road West
Shanghai 200235
Tel: +21 6440 3331
Fax: +21 6440 1102
Email: info@ankersmid.cn

Romania

Ankersmid Romania

Emil Botta Street 4
031074 Bucharest
Tel: +40 21 326 26 25
Fax: +40 21 326 26 25
Email: info@ankersmid.co.ro

Korea

Ankersmid Asia Ltd.

B-203 Technical Innovation Building Ulsan
Technopark, 421 DaunDong, Junggu Ulsan,
South Korea
Tel: +82 52 222 2608
Fax: +82 52 222 2609
asia@ankersmidsampling.com

The Netherlands

Ankersmid Netherlands

Samuel Morsestraat 4
NL-7442 DH (Ov.)
Tel: +31 548 595969
Fax: +31 548 621972
E-mail: info@ankersmid-process.nl

France

Ankersmid Apollo Instruments

6, Rue Jacques de Vaucanson
ZAC Mercières - Zone 2
F-60200 Compiègne
Tel: +33 344 42 66 19
Fax: +33 344 85 24 72
Email: info@apolloinstruments.fr

Germany

Ankersmid Sampling BVBA

Freiherr-vom-Stein-Strasse 4
47229 Duisburg
Tel: +49 170 566 88 34
Email: lars.kaminke@ankersmidsampling.com



ANKERSMID Gas sampling and conditioning equipment

Sales agencies / Distributors

Denmark

C.K. Environment A/S

Walgerholm 3
3500 Værløse
Tel.: +45 44 98 99 06
Fax.: +45 44 98 99 60
Email: info@cke.dk

Slovenia, Croatia, Bosnia & Herzegovina, Macedonia, Kosovo, Albania, Serbia, Montenegro, Bulgaria

RACI d.o.o.

Tehnološki park 24, 1001 Ljubljana
Tel: +386 1 620 33 80
Fax: +386 1 620 33 90
Email: info@raci.si

France

APM ENVIRONNEMENT SAS

16 ave du Marechal Davout
91800 Brunoy
Tel: +33 160 48 18 02
Email: info@apm-environnement.com

Greece

ENAVSIS Trade & Energy Ltd

26, Parnassou Street & Derkon,
142 31 N. Ionia, Athens
Tel: +30 210 2717946
Fax: +30 210 2799905
Email: enavsis@enavsis.gr

Norway

Yaga AS

Anolitveien 16
1400 SKI
Tel: +47 64 87 75 50
Email: post@yaga.no

Spain

ENVIRA SOSTEBLE, S.A.

Parque Tecnológico de Asturias, 47
33428 – Llanera (Asturias)
Tel: +34 985 73 39 52
Email: sostenible@envira.es

Japan

SEIKA Corporation

New Tokyo Bldg., 3-1
Marunouchi 3-Chome, Chiyoda-Ku
Tokyo 100-0005
Tel: +81 3 5221 7123
Email: h-sekikawa@jp.seika.com

Sweden

Alfakomp AB

varvarvägen 3
13204 Saltsjö-Boo
Tel: +46 8 747 60 60
Tel: +46 8 747 16 61
Email: info@alfakomp.se

United Kingdom

a1-cbiss Ltd

11 Ark Royal Way, Lairdside Technology Park
Birkenhead, CH41 9HT
Tel: +44 151 666 8300
Fax: +44 151 666 8329
Email: sales@a1-cbiss.com

Australia

AquaGas Pty Ltd.

Unit 3/3 Wirranina Place
Currumbin QLD4223
Tel: +61 416 168 559
Email: aymeric@aquagas.com.au

Slovak Republic

ECM ECO Monitoring, a.s.

Nevädzová 5,
821 01 Bratislava
Tel: +421 2 4342 9417
Fax: +421 2 4342 7465
Email: ecm@ecm.sk

Perú

Condera Environmental Equipment

Mz. I, Lte.74, El Naranjito,
Puente Piedra, Lima 22
Tel: +51 949748410
Email: info@conderaequipment.com

Spain

PSA INGENIEROS Chemical S&S S.L.

Agustina de Aragón 147-40
28342 Valdemoro (Madrid)
Tel: +34 91 865 80 81
Email: psaingenieros@psaingenieros.com

ANKERSMID Sample probe

ASP 3xx/4xx/5xx Series

Application

The ASP gas sample probes are designed for continuous gas sampling in difficult processes with gases of high or low dust content, different temperatures and extreme humidity.

As the ASP is available in different lengths, it is suitable for applications with low to very high dust loads.

Depending on the acid dew point, the standard probe operates at 180°C or when necessary with a high temperature version at 320°C (f.e. Denox applications).

Description

Due to its modular design and various options, the Ankersmid heated sample probe filters cover the widest range of applications. With a choice of different lengths of heated filter body, a filter element of 150mm length, suitable for most applications up to 1g dust/m³ can be integrated. 180mm filters with a larger filter surface are used for applications up to 4g dust/m³; with the blow-back function dust loads of up to 10g/m³ can be handled.


The 500mm model filter of the ASP 500 has a capacity for dust up to 10g/m³. When this type is equipped with blow-back option, it handles up to 20g/m³. For even higher dust loads, a primary filter is positioned on top of the first filter.

A significant advantage is that all filters are replaceable without dismounting the probe without using any tools and in the shortest possible time. Cleaning and exchanging of unheated sample tubes or preliminary top-filters can be affected by extracting the filter from the probe.

The probe temperature is controlled by a microprocessor based PID-controller (optional with Modbus/RS485 communication). Alarm or fault contacts can be programmed and the temperature can be changed easily. The standard sensor is PT100, whereas a thermo-couple is standard for the high temperature version.

The following features are offered for all probes:

- Test gas can be injected directly into the probe according to EN14181 (regulation for calibration of emission monitoring systems) that enables calibration gas feeding via the filter element of the gas sample probe.
- Test gas can be injected into the probe through a check valve directly to the sample outlet so that no calibration gas is lost to the stack.
- An isolation valve with pneumatic control shuts off the sample outlet from the internal filter area in case of blow-back.
- Cleaning of filter and the sample tube through a high-flow inlet ports so less maintenance is necessary in high dust load applications. This inlet can be controlled by pneumatic or electric valves, and also in combination with a volume chamber for high pressure flow.

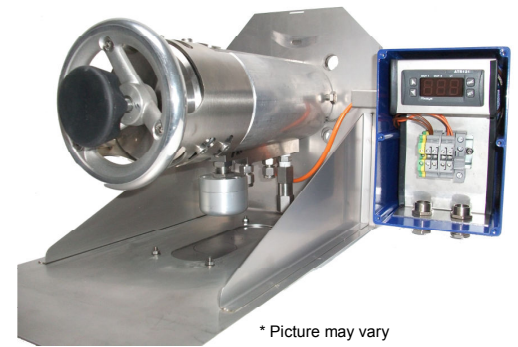

* Picture may vary

- **Retractable inner probe body for easy changement of pre-filter and/or (unheated) sample tube without dismounting the probe**
- **Back-flush/calibration optional**
- **Test gas connection according to EN14181 for calibration/test gas feeding via filter element optional**
- **Spun glass cartridge for diesel generators, diesel exhaust or similar sooty applications available**
- **Universal mounting clamp for heated line**
- **Very universal applicability**
- **Compact and modular design suited for most applications**
- **Universal support for heated sample line by pre-lasered cut-outs for M40-gland connection in the bottom plate and additional optional clamp**
- **Reduce operator exposure to safety risks**
- **Easy mounting**
- **Easy maintenance**
- **Digital communication**



ANKERSMID Sample probe
ASP 3xx/4xx/5xx Series

Technical data


Version	ASP 30X	ASP 40X	ASP 50X
Integrated filter Length	150mm	180mm	500mm
Integrated back-flush	available	available	available
Protective cover	yes		
Degree of protection	IP55 EN60529		
Wet Materials	Stainless steel 316		
Sealing materials	FPM/ Viton® for 180°C and Kalrez®/Graphite for 320°C		
In situ probe tube/pre-filter	Optional 200 or 500mm, stainless steel, 2µm or 20µm		
Sample pressure max.	0,5-6 bar abs.		
Ambient temperature	-20°C to +65°C		
Filter chamber volume	300cm ³	300cm ³	760cm ³
Filter element, porosity	Ceramic, 2µm	stainless steel 316, 5 µm	stainless steel 316, 5µm
Temperature control	Standard 0-180°C with Pt 100; Option 0-320°C with thermo-couple		
Electronic Controller	Digital programmable PID-controller with optional RS485 Modbus		
temperature alarm contact	Free programmable contact, rating: 250V, 3A~, Factory set at alarm point: ΔT 20°C		
Sample gas outlet connection	1/4" f NPT		
Test gas/back-flush connection	1/4" f NPT		
Power supply	180°C		
	230VAC/800W 115VAC/800W	230VAC/1500W 115VAC/1500W	
	320°C		
	230VAC/1200W 115VAC/1200W	230VAC/1500W 115VAC/1500W	
Electrical connections	Terminals max. 4mm ² , 2x PG13,5 cable gland		
Electrical equipment standard	EN 61010, EN 60519-1		
Mounting flange	DN65 PN6b, SS316 other connections optional or on request		
Over all dimensions	430 x 264 x 436mm		430 x 264 x 636mm
Weight	18 kg	18 kg	26 kg

ΔP at flow of:	100	200	500	1000	1500	NI/h
ΔP with new filter element 2µ, 150mm	0,009	0,013	0,025	0,055	0,090	bar
ΔP with new filter element 5µ, 180mm	0,005	0,010	0,018	0,030	0,050	bar
ΔP with new filter element 5µ, 500mm	0,002	0,004	0,010	0,015	0,025	bar



ANKERSMID Sample probe
ASP 3xx/4xx/5xx Series

Dimensions

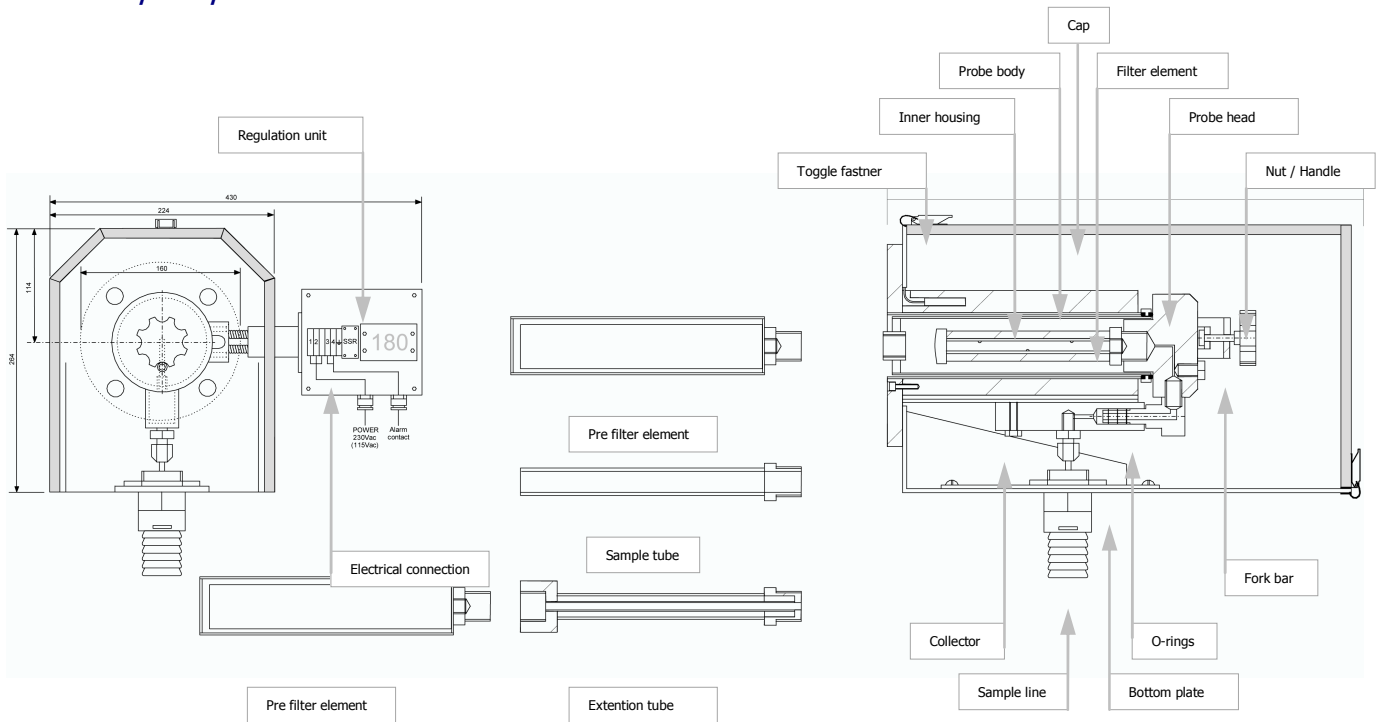





ANKERSMID Sample probe

ASP 3xx/4xx/5xx Series


Performance

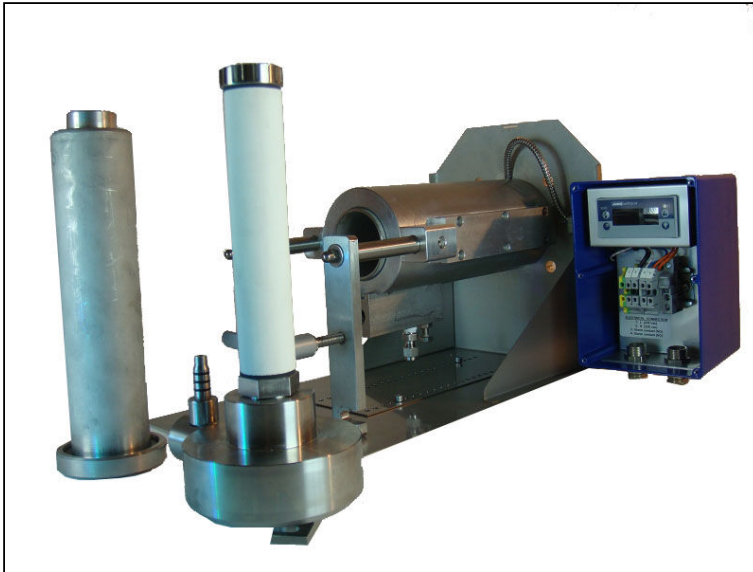

- 1 Sample Probe type ASP 300
- 2 Junction box with digital temperature controller
- 3 Retractable inner probe body (SS316)
- 4 Probe lid with mounted external filter element type AUF 015 (150mm, 2µm, ceramics)

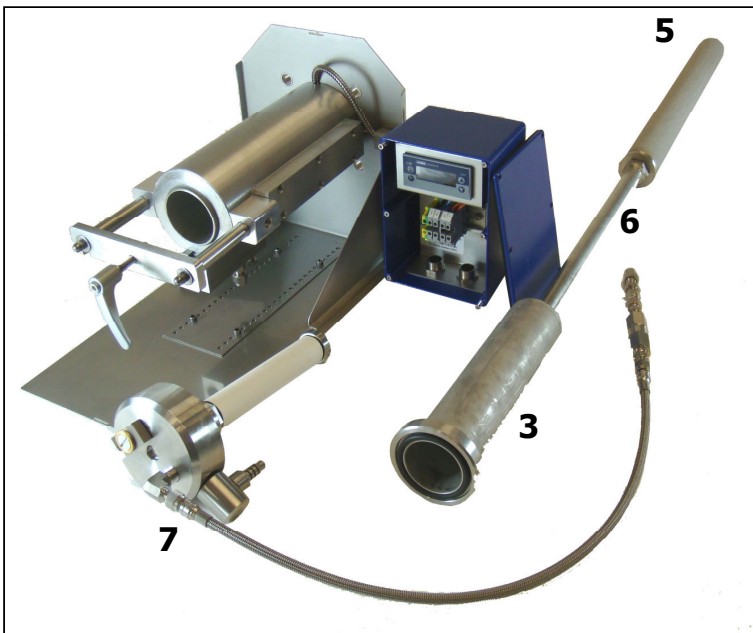

- 5 Pre-filter type ATF 050 (500mm, 2µm, SS316)
- 6 Extension tube type AET 050 (500mm, SS316)
- 7 Probe lid with optional back-flush valve type ASP 124 and connecting metal tube

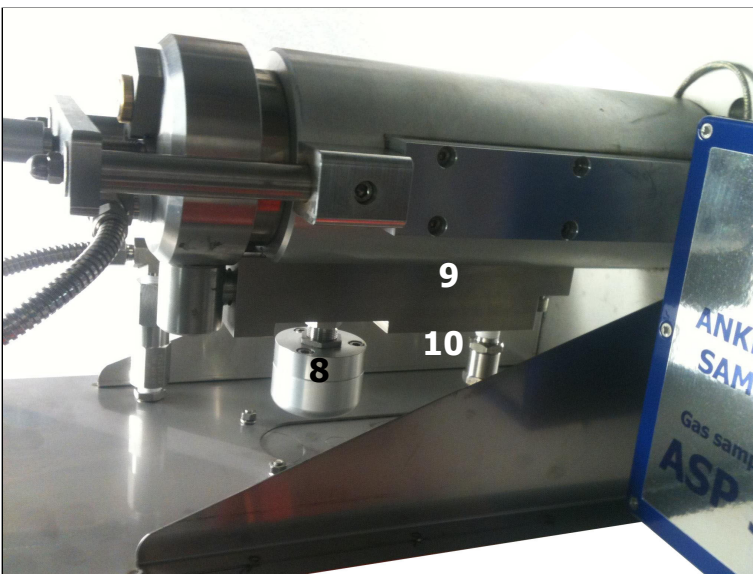

- 8 Optional pneumatic isolation valve type ASP 122 to shut-off the sample gas outlet, integrated in the slide connector (9) below the probe
- 9 Slide connector
- 10 Calibration gas relief valve type ASP 070

ANKERSMID sample probe ASP 611/613/622 Series



Application

The ASP gas sample probes are designed for continuous gas sampling in difficult processes with gases of high or low dust content, different temperatures and extreme humidity.

Description

Due to its modular design and various options, the Ankersmid heated sample probe filters cover the widest range of applications. In the heated filter body a filter element of 150mm length, suitable for most applications up to 1g dust/m³, is integrated. A 180mm long filter with an outer diameter of 40mm and made of stainless steel can be optionally used for applications up to 4g dust/m³; with the blow-back function dust loads of up to 10g/m³ can be handled. For even higher dust loads, a primary filter has to be positioned as pre-filter.


A significant advantage is that all filters are replaceable without dismounting the probe without using any tools and in the shortest possible time. Cleaning and exchanging of unheated sample tubes or preliminary top-filters can be affected by extracting the filter from the probe.

The probe temperature with Exd-temperature sensor type Pt100 is controlled by an ATEX-certified controller-limiter unit with temperature alarm.

The probe is delivered with valid ATEX-certificates for all electrical components.

The following features are offered for all probes:

- Test gas can be injected directly into the probe according to EN14181 (regulation for calibration of emission monitoring systems) that enables calibration gas feeding via the filter element of the gas sample probe.
- Test gas can be injected into the probe through a check valve directly to the sample outlet so that no calibration gas is lost to the stack.
- An isolation valve with pneumatic control shuts off the sample outlet from the internal filter area in case of blow-back.
- Cleaning of filter and the sample tube through a high-flow inlet ports so less maintenance is necessary in high dust load applications. This inlet can be controlled by pneumatic or electric valves, and also in combination with a volume chamber for high pressure flow.

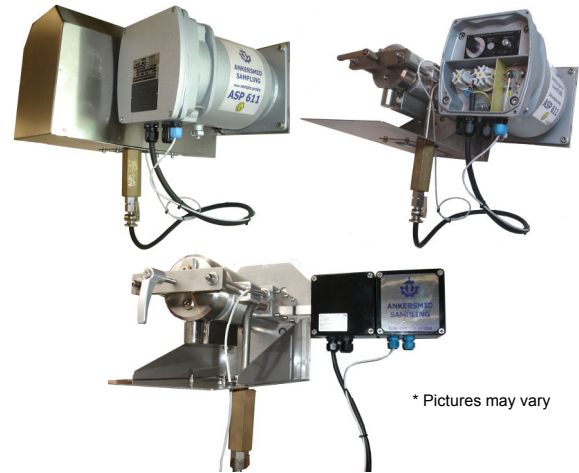

* Pictures may vary

- **Retractable inner probe body for easy changement of pre-filter and/or (unheated) sample tube without dismounting the probe**
- **Back-flush/calibration possibility as standard**
- **Test gas connection according to EN14181 for calibration/test gas feeding via filter element optional**
- **Very universal applicability**
- **Compact and modular design suited for most applications**
- **Universal support for heated sample line by pre-lasared cut-outs for M40-gland connection in the bottom plate and additional optional clamp**
- **Reduce operator exposure to safety risks**
- **Easy mounting**
- **Easy maintenance**
- **Patented construction**



ANKERSMID Sample probe
ASP 611/613/622 Series





Technical data

Gas Sample Probe Version	ASP 611	ASP 613	ASP 622
Integrated filter length	150mm		
Integrated back flush	optional		
Protective cover	yes		
Electrical Terminal box	IP54		
Gas wetted Materials	Stainless steel 316, ceramics		
Sealing materials	FPM Viton®		
Max. dust loading	1g/m ³ (with back purge: 10g/m ³)		
Max. sample temperature	+180°C		
Time before ready for use	Approx. 45 minutes		
Sample pressure max.	0,5-6 bar abs.		
Ambient temperature	-20°C to +65°C		
Filter chamber volume	300cm ³		
Filter element porosity	2µm		
Filter element material	Ceramics		
Thermostatic Control	0-180°C, Exd-Pt100		
Electronic Controller	Electronic controller		
Mounting area of controller	inside Ex-zone 1, 2, 21, 22	outside Ex-zone	
Temperature alarm contact	<120°C, 1 change-over contact, 230V 1,5AAC, 0,5ADC		
Sample gas outlet	¼" NPT f		
Test gas connection (option)	¼" NPT f		
Back flush connection (Option)	¼" NPT f		
Power supply	230VAC/400W (standard), 115VAC/400W		
Electrical connections	3 x 1,5mm ²		
Electrical equipment standard	EN60529		
Marking	II2G EEx d e ib IIC T3	II3G, Ex nR IIB T3	
Mounting flange	DN65 PN6B, SS316 other connections optional or on request		
Weight	±20 kg		
Overall dimensions	~ 440 x 470 x 360mm (w x h x d)		




ANKERSMID Sample probe
ASP 611/613/622 Series

Dimensions

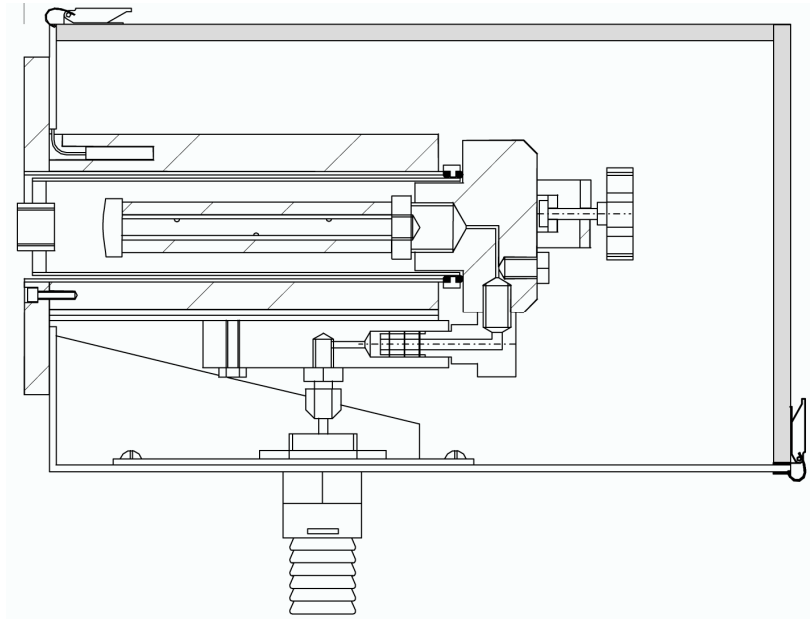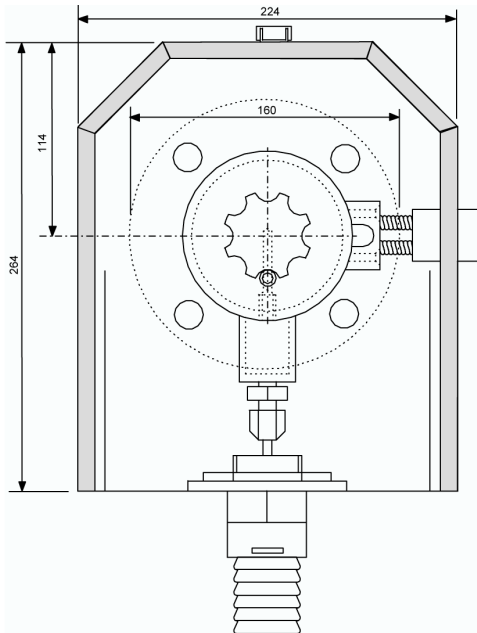

ANKERSMID Sample probe
ASP 611/613 Series

Controller

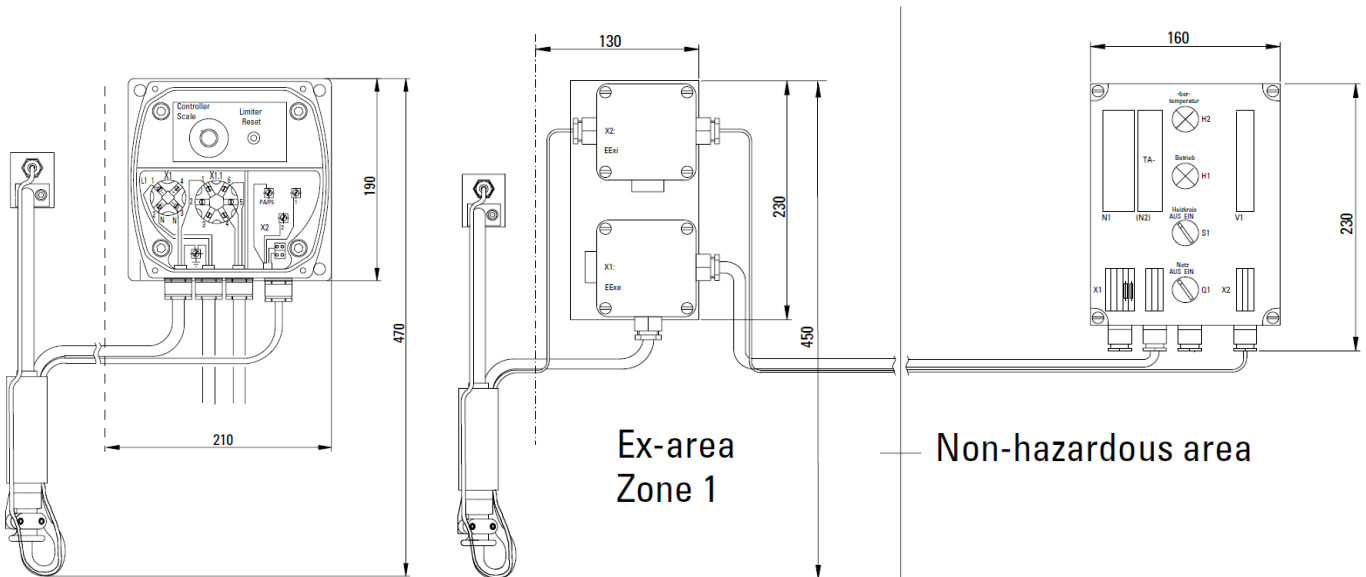

Sample probe type ASP 611 controller

Sample probe type ASP 613 controller



ANKERSMID Sample probe ASP 1xx Series

Application

The ASP stationary gas sample probe is especially designed for standard process and ambient conditions, safe and reliable operation as well as easy maintenance at a wide range of applications is required. The innovative construction and design guarantees a perfect operation for gas measurements.

Description

Due to various acid dew points at various applications the probe is heated up to 180°C.

A filter element of 150mm is integrated, suitable for most applications up to 1g dust/m³. A significant advantage is that this filter is replaceable without dismounting the probe and without using any tools.

Due to its modular design and various options, the heated sample probe covers the widest range of applications.


With the filter element of 150mm length this probe is suitable for most applications up to 1g dust/m³; with the blow-back function dust loads of up to 10g/m³ can be handled.

Test gas can be injected directly into the probe through the calibration gas connection according to EN14181 (regulation for calibration of emission monitoring systems) that enables calibration gas feeding via the filter element of the gas sample probe. The use of the optional high-flow check valve type APP 200 is recommended.

The stationary gas sample probe series ASP is a perfect completion to the Ankersmid gas conditioning system series ASS 301/311. Both devices can easily be connected together by the Ankersmid heated sample line series AHL which guarantees a safe and reliable connection.

Using this heated line the probe's electrical power is then fed to the probe via the feed line integrated within the sample line.

To avoid cooling-down and condensation of sample gas in the extraction area, a heated sample probe tube series AST 0xx/1xx/2xx is available.

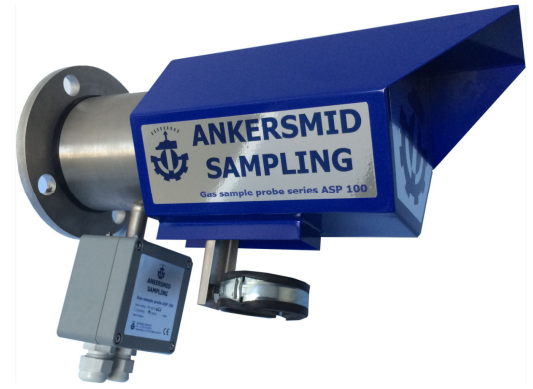

* Picture may vary

- **180°C operating temperature**
- **Integrated over-temperature safety switch-off**
- **Low-temperature alarm**
- **Back-flush/calibration possibility as standard**
- **Test gas connection according to EN14181 for calibration/test gas feeding via filter element available as standard**
- **Universal mounting clamp for easy installation of heated lines**
- **Optional with portable carrying protection case with spare filter**
- **Very universal applicability**
- **Compact design suited for most stationary applications**
- **Full stainless steel design**
- **Easy handling**
- **Easy maintenance**



ANKERSMID Sample probe
ASP 1xx Series



Technical data

Gas Sample Probe Version	ASP 100
Integrated filter length	150mm
Integrated back-flush/calibration	Yes
Gas-wetted materials	Stainless steel 316
Sealing materials	Viton®
Max. dust loading	1g/m ³
Max sample temperature	Depending on sample tube
Time before ready-for-use	Approx. 90min
Insitu pre-filter	Optional
Sample pressure max.	0,5-4 bar abs.
Ambient temperature	-20°C to +60°C
Filter element porosity, material	2µm, ceramics (other materials on request)
Operating temperature	0-180°C
Temperature control	Self-limiting heating cartridges with - Low-temperature alarm contact (NO) - Over-temperature safety switch-off
Temperature alarm contact rating	250V-10A AC (NO)
Sample gas outlet	¼" f NPT
Test gas/blowback connection	¼" f NPT
Mounting flange	DN65 PN6b
Sample gas inlet	G ¾" f
Power supply	230VAC/450W 115VAC/450W
Degree of Protection	IP54
Electrical connections	Junction box with 2 cable glands, Terminals (5 pcs.), max. 2,5mm ²
Dimensions	Approx. 260 x 150 x 230mm (l x w x h) with weather protection shield
Weight	Approx. 6 kg



ANKERSMID Sample probe
ASP 1xx Series

Dimensions

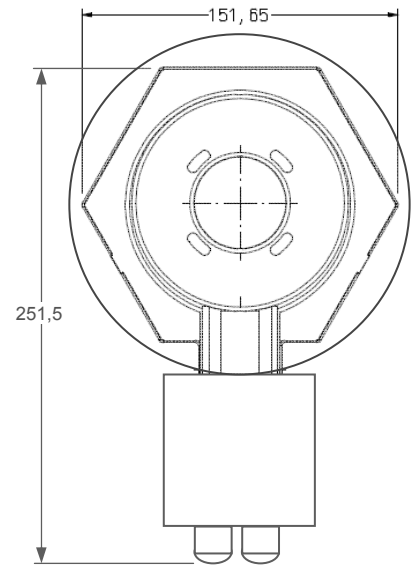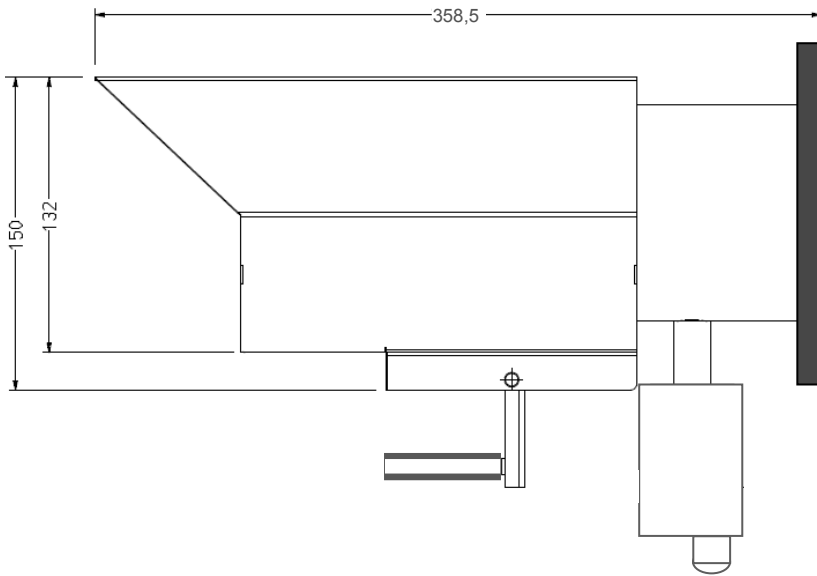



ANKERSMID Sample probe ASP 320 DeNox heated with separator

Application

The **ASP** gas sample probe type ASP 320 is designed for continuous gas sampling especially at DeNOx-processes (SCR) where NH₃ is added to the flue gas in order to reduce the NOx content.

This new sampling technique has also proved to be suitable for processes with very high pollutant concentrations.

In these applications, a significant problem is the measurement of NOx, SO₂ and O₂-concentrations.

With temperatures of <300°C, ammonium salts are produced due to the chemical reaction of NH₃ and SO₂/SO₃ in the flue gas.

This salification blocks up filters and sample lines in a short time.

In order to prevent a blocking due to salification, the probe temperature is adjusted at 320°C.



*Picture may vary

Description

The probe type ASP 320 is based on the standard Ankersmid sample probe. Due to its modular and innovative design the Ankersmid heated sample probe cover also meet the special requirements of above mentioned application.

With the heated filter body a filter element of 150mm length, suitable for most applications up to 1g dust/m³, is integrated.

When the integrated port is used for back-flush higher dust loads can be handled. Additional a pre-filter can be mounted on top of the sample probe.

The filter element can be replaced without any tools and in the shortest possible time. At the sample gas outlet of the probe a special non-heated condensate vessel of glass is mounted. It is filled with glass balls to extend the surface for the salification. The salt deposits and will be washed out with the condensate. A peristaltic pump type ASR25 continuously removes the condensate with the solved ammonium salts. The temperature of the vessel is higher than the ambient temperature because of the hot gas stream. Therefore a loss of measured components is negligible because of warm condensate. In case of a DeNOx application with a small content of NH₃ (normally only a few ppm) it is possible to analyse SO₂ and NOx without great losses (only some ppm which normally can be neglected).

To determine the loss, it is possible to give test gas via the probe to the analyser(s). A measuring fault can be found and calibrated. As an option the vessel can be heated as well to suppress chemical reactions of the measured component below a defined temperature.

At the sample outlet of the vessel a heated gas sample line series AHL can be connected.

- **Special probe behind DENOX (SCR)**
- **Heated up to +320°C**
- **No salt crystallization in the heated filter part**
- **Condensate vessel in the gas outlet with glass ball filling to extend the reaction surface**
- **Reduce operator exposure to safety risks**
- **Integrated peristaltic pump**
- **Easy mounting**
- **Easy maintenance**
- **Patented construction**



ANKERSMID Sample probe
ASP 320 DeNox heated with separator

Technical data

Version	ASP 30X
Integrated filter Length	150mm
Integrated back-flush	available
Protective cover	yes
Degree of protection	IP55 EN60529
Materials of gas wetted parts	Stainless steel 316
Sealing materials	Graphite/Kalrez®
In situ probe tube/pre-filter	Optional 180mm or 500mm, stainless steel, 5µm
Sample pressure max.	0,5-6 bar abs.
Ambient temperature	-20°C to +65°C
Filter chamber volume	300cm ³
Filter element, porosity	Ceramic, 2µm
Separator vessel	Body: Duran® Glass, filling: glass balls
Separator vessel volume	500ml
Peristaltic pump	ASR25
Temperature control	0-320°C with thermo-couple
Electronic Controller	Digital programmable PID-controller, optional with RS485 Modbus
temperature alarm contact	Free programmable contact, rating: 250V, 3A~, Factory set at alarm point: ΔT 20°C
Sample gas outlet connection	1/4" f NPT
Test gas/back-flush connection	1/4" f NPT
Power supply	230VAC/1250W 115VAC/1250W
Electrical connections	Terminals max. 4mm ² , 2x PG13,5 cable gland
Electrical equipment standard	EN 61010, EN 60519-1
Mounting flange	DN65 PN6b, SS316 other connections optional or on request
Weight	Approx. 20 kg

ΔP at flow of:	100	200	500	1000	1500	NI/h
ΔP with new filter element 2µ, 150mm	0,009	0,013	0,025	0,055	0,090	bar



ANKERSMID Portable sample probe APP 1xx Series

Application

The APP portable gas sample probe is especially designed for portable applications where easy handling, safe and reliable operation as well as easy maintenance at a wide range of conditions is required. The low weight and innovative design guarantees a perfect operation for mobile measurements.

Description

Due to various acid dew points at various applications the probe is heated up to 180°C.

A filter element of 150mm is integrated, suitable for most applications up to 1g dust/m³. A significant advantage is that this filter is replaceable without dismounting the probe.

With the filter element of 150mm length this probe is suitable for most applications up to 1g dust/m³; with the blow-back function dust loads of up to 10g/m³ can be handled.

Calibration gas can be injected directly into the probe through the calibration gas connection according to EN14181 (regulation for calibration of emission monitoring systems) that enables calibration gas feeding via the filter element of the gas sample probe. The use of the optional high-flow check valve type APP 200 is recommended.

The portable gas sample probe series APP is a perfect completion to the Ankersmid portable gas conditioning system series APS 303/313. Both devices can easily be connected together by the Ankersmid heated sample line type AHL205/025 with the incorporated innovative Quick-Lock System which guarantees a fast and reliable connection.

Using this heated line the probe's electrical power is then fed to the probe via the feed line integrated within the sample line.

To avoid cooling-down and condensation of sample gas in the extraction area, the heated sample probe tube type AST 301 is available.



* Pictures may vary

- **+180°C operating temperature**
- **Integrated over-temperature safety switch-off**
- **Low-temperature alarm contact**
- **Test gas connection according to EN14181 for calibration/test gas feeding via filter element available as standard**
- **Back-flush port**
- **Spun glass cartridge for diesel generators, diesel exhaust or similar sooty applications**
- **Universal mounting clamp for heated line**
- **Optional Quick-Lock system for easy, fast and reliable connection of Ankersmid heated lines series AHL**
- **Very universal applicability**
- **Compact design suited for most portable applications**
- **Easy handling**
- **Easy maintenance**
- **Mounting eye on housing incl. chain (2m) for easy fixation**





ANKERSMID Portable sample probe APP 1xx Series




Technical data

Gas Sample Probe Version	APP 100
Integrated filter length	150mm
Integrated back-flush/calibration	Yes
Gas-wetted materials	Stainless steel 316
Sealing materials	Viton®
Max. dust loading	1g/m ³
Max. sample temperature	Depending on sample tube
Time before ready-for-use	Approx. 15-30min
Insitu pre-filter	Optional
Sample pressure max.	0,5-4 bar abs.
Ambient temperature	-20°C to +80°C
Filter element porosity, material	2µm, ceramics (other materials on request)
Operating temperature	0-180°C
Temperature control	Self-limiting heating cartridges with Power-on indication by red LED and ready-to-use indication by green LED
Safety features	Over-temperature safety switch-off
Sample gas outlet	¼" f NPT
Test gas/blowback connection	¼" f NPT
Sample gas inlet	G 3/8" f
Power supply	230VAC/450W 115VAC/450W
Degree of Protection	IP40
Electrical connections	Plug and socket connector 7-pin, with 4 meter connection cable
Dimensions	Approx. 330 x 125 x 220mm (l x w x h)
Weight	Approx. 2,5 kg



ANKERSMID Portable sample probe
APP 1xx Series

Dimensions

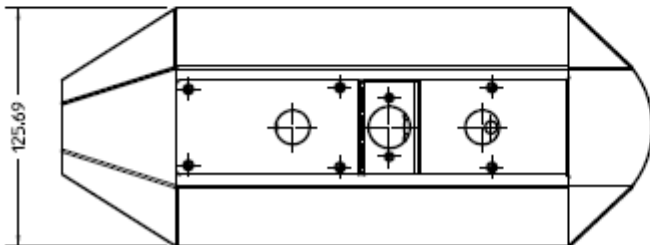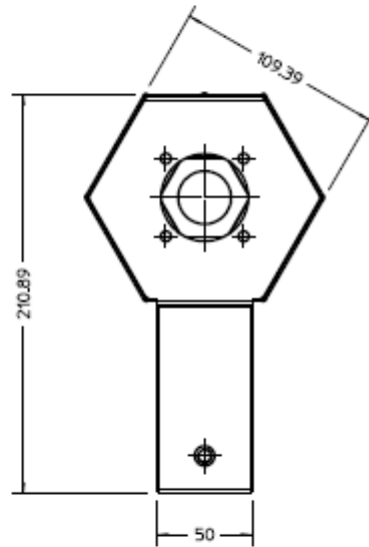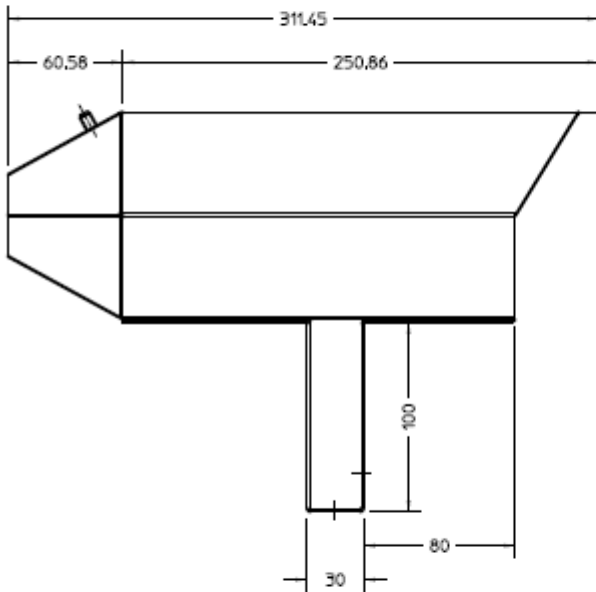



ANKERSMID Sample tubes - unheated

for sample probes series ASP 1xx/3xx/4xx/5xx/6xx

Application

These sample tubes are used in combination with the Ankersmid ASP probes in order to sample the gas in the optimal section of the gas-stream. For a typical installation of the probe-tip, a position in the middle third of the gas stream is advised.

For dust concentrations higher than 2g/m^3 , we advise fitting a pre-filter in combination with an extension tube.

Description

Ankersmid sample tubes are selected according to specific applications. Influencing process parameter are the gas composition, water vapour saturation, dust loading, process temperature, pressure and the gas velocity.

Among the standard length (typically 1m) other lengths are available on request.

Sample tubes/extension tubes with volume displacers are available for applications with low sample gas flow to decrease the retention time.


For gas sampling downstream a wet scrubber with a high content of water the demister tube ADT, equipped with an integrated demister for liquid drop collection, as available.

The connection thread enables an easy mounting to the gas sample probes.

Additional sampling accessories

For high dust loading:
Top-filter series ATF

For lower deviation of dew point on process side:
Heated sample tubes series AST 05x, AST 10x, AST 15x, AST 20x

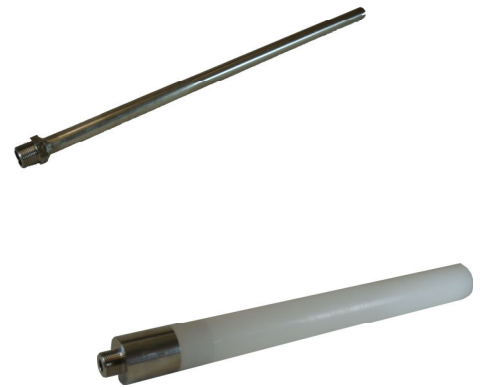


* Pictures may vary

- **Used for dust loading up to 2g/m^3**
- **Sampling after wet scrubber up to 90°C**
- **Sampling gases up to max. 1400°C**
- **Different materials**
- **Available in lengths up to 2500mm, others on request**



ANKERSMID Sample tubes - unheated

for sample probes series ASP 1xx/3xx/4xx/5xx/6xx

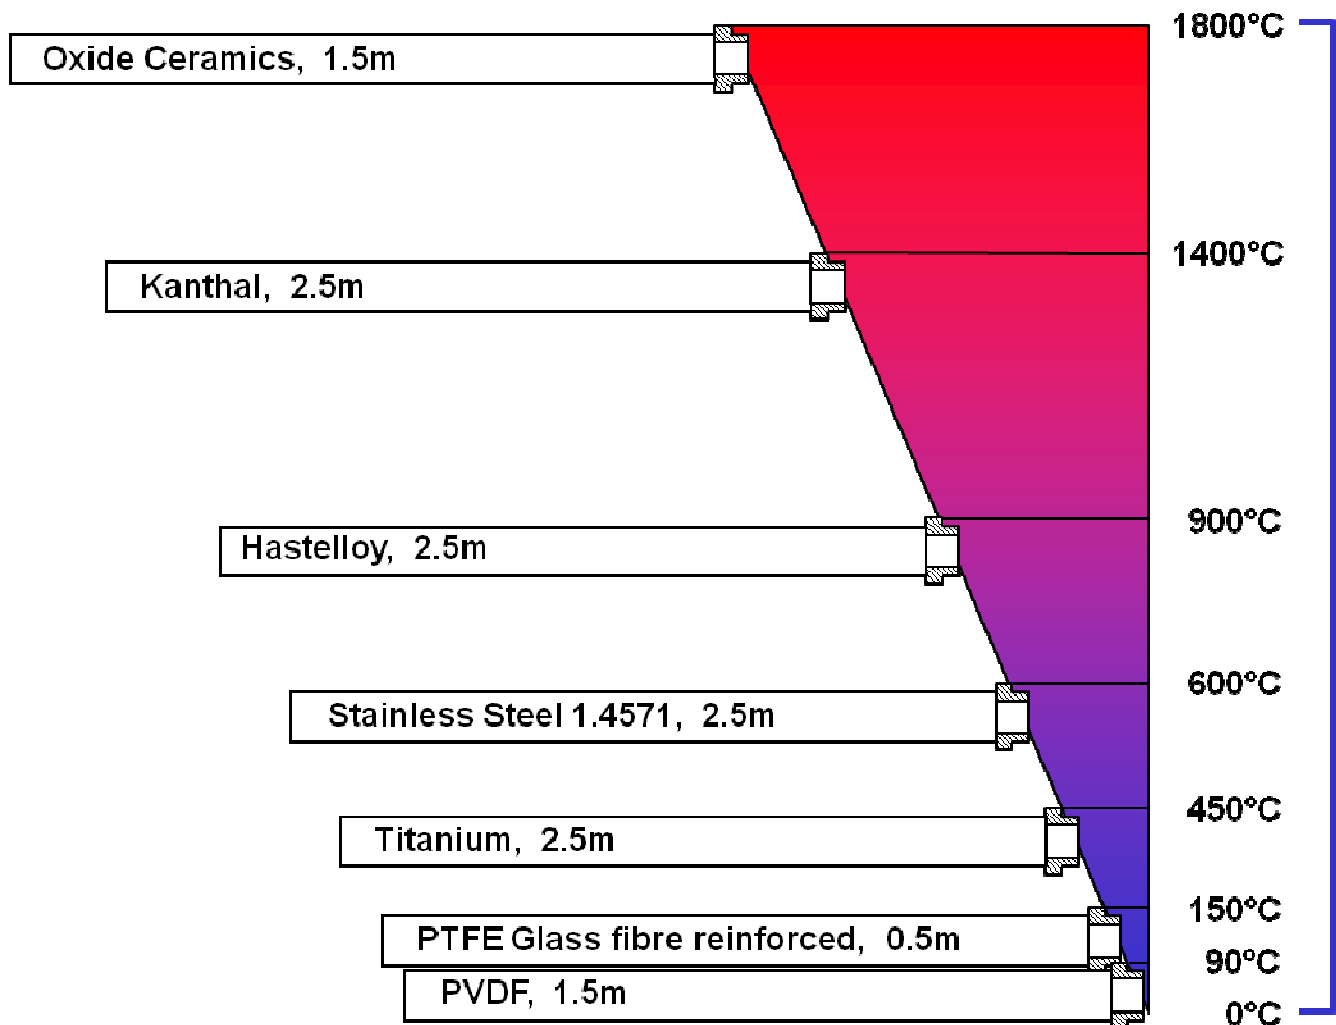

Maximum sample tube temperature is depending on the horizontal length inside this temperature zone

Application	Tube type	Max. T [°C]	Material	Connection	Outer diameter
After wet scrubber or high dew point	ADT 080 (Demistor tube)	90°C	PTFE	G ¾"o	40-70
Temp < 150°C	AST 411-412- 413	150°C	PTFE	G ¾"o	22
Temp < 600°C	AST 051- 404	600°C	SS316	G ¾"o	22
Temp < 900°C	AST 431-432-433-434	900°C	Hastelloy C®	G ¾"o	22
Temp < 1400°C	AST 435	1400°C	Kanthal®	G ¾"o	20
HCl or high corrosive gas	AST 421-422-423-424	450°C	Titanium	G ¾"o	22



ANKERSMID Sample tubes - heated

AST 05x/10x/15x/20x series

Application

The electrically heated Ankersmid sample probe tube AST 05x-10x-15x-20x are used in extractive sampling systems to avoid cooling and condensation of the sample.

Condensation, in combination with a high dust load, can result in blockage of the probe. This is to be strictly avoided as sample gases may be absorbed into the condensate after cooling and will be undetectable. An extra stainless filter can be mounted on top of the tube in case of very high dust levels ($> 10 \text{ g/m}^3$).

Description

This electrically heated sample tube is available in 4 standard lengths:

0.5, 1, 1.5 and 2.0 meter (other lengths on request).

As for all Ankersmid probes, the standard flange is a DN65 PN6. Adapter flanges for most common process connections can be provided if required.

If needed, it is possible to affix a non-heating sample probe or pre-filter to the tip of the heated tube.

Inside the sample tube a thermocouple type J (Fe-CuNi) is integrated. As a standard it is installed in combination with the digital controller, the user has a freely programmable set point and alarm.

Optional available is a 2-way Modbus/ RS485 communication that combines signals from all installed Ankersmid controllers, so that digital communication with the control room is possible.

Additional sampling accessories

For high dust loading:
Top-filter series ATF



- **Different lengths available**
- **Completely heated sample tube**
- **Digital controller**
- **Easy mounting**
- **Optional: Modbus/RS485**



ANKERSMID Sample tubes - heated

Technical data

AST 05x/10x/15x/20x series

Series AST Type	AST05x	AST10x	AST15x	AST20x
Temperature sensor & controller (additional part number)				
AST 001	Incorporated capillary temperature controller			
AST 002	Temperature sensor thermo-couple type J (Fe-CuNi)			
AST 004	Temperature sensor thermo-couple type J (Fe-CuNi), including integrated electronic controller with high/low alarm			
RS 485 / Modbus interface	Optional			
Probe tube length L1	500mm	1000mm	1500mm	2000mm
Sample temperature max.	500°C	500°C	450°C	400°C
Operating temperature max. (pre-adjusted at 180°C)	200°C	200°C	200°C	200°C
Pre-filter	Optional			
Sample gas inlet connection	G3/4"i			
Dust loading	max. 2 g/m3			
Probe tube volume	200ml/m			
Sample pressure max.	5 bar g			
Ambient temperature	-20°C to +70°C			
Storage temperature	-30°C to +70°C			
Ready for operation	Approx. 0,5h			
Power supply	230VAC, 500W 115VAC, 500W	230VAC, 800W 115VAC, 800W	230VAC, 1200W 115VAC, 1200W	230VAC, 1500W 115VAC, 1500W
Electrical connection	2 x 2.5mm ² + 2.5mm ²			
Electrical standard	EN 61010, EN60519-1			
Degree of protection	IP54 EN 60529			
Mounting flange	DN65 PN6			
Material of gas wetted parts	Stainless steel 316			



ANKERSMID Sample tubes - heated

AST 30x series – for portable heated sample probes

Application

The electrically heated portable sample probe tubes series AST 30x are used in extractive portable sampling systems to avoid cooling and condensation of the sample.

Condensation, in combination with a high dust load, can result in blockage of the probe. This is to be strictly avoided as sample gases may be absorbed into the condensate after cooling and will be undetectable. An extra stainless filter can be mounted on top of the tube in case of very high dust levels ($> 10 \text{ g/m}^3$).

Description

This electrically heated sample tube is available as standard with 1m length (other lengths on request).

To fit all portable Ankersmid probes, the heated tube has a G3/8"m thread connection.

If needed, it is possible to affix a non-heating sample probe or pre-filter to the tip of the heated tube.

A capillary switch controller is included to adjust the operating temperature up to max. 200°C.



- **Different lengths available**
- **Completely heated sample tube**
- **Integrated capillary controller**
- **Easy mounting**
- **Especially for portable applications**

Additional sampling accessories

For high dust loading:
Top-filter series ATF



ANKERSMID Sample tubes - heated

Technical data


AST 30x series – for portable heated sample probes

Series AST Type	AST 301
Temperature controller	Capillary switch controller
Probe tube length L1	1000mm (others on request)
Sample temperature max.	500°C
Operating temperature max.	200°C
Pre filter optional	Option
Sample gas inlet connection	G3/8"i
Dust loading	max. 2g/m ³
Probe tube volume	20ml/m
Sample pressure max.	5 bar g
Ambient temperature	-20 °C to +70 °C
Storage temperature	-30 °C to +70 °C
Ready for operation	Approx. 1h
Power supply	230VAC, 500W (115VAC, 500W on request)
Electrical connection	2 x 1.5mm ² + 1.5mm ²
Electrical standard	EN 61010, EN60519-1
Degree of protection	IP54 EN 60529
Outlet connection	G 3/8"m
Material of gas wetted parts	Stainless steel 316




ANKERSMID Sample tubes - heated
AST 05x/10x/15x/20x series

Dimensions

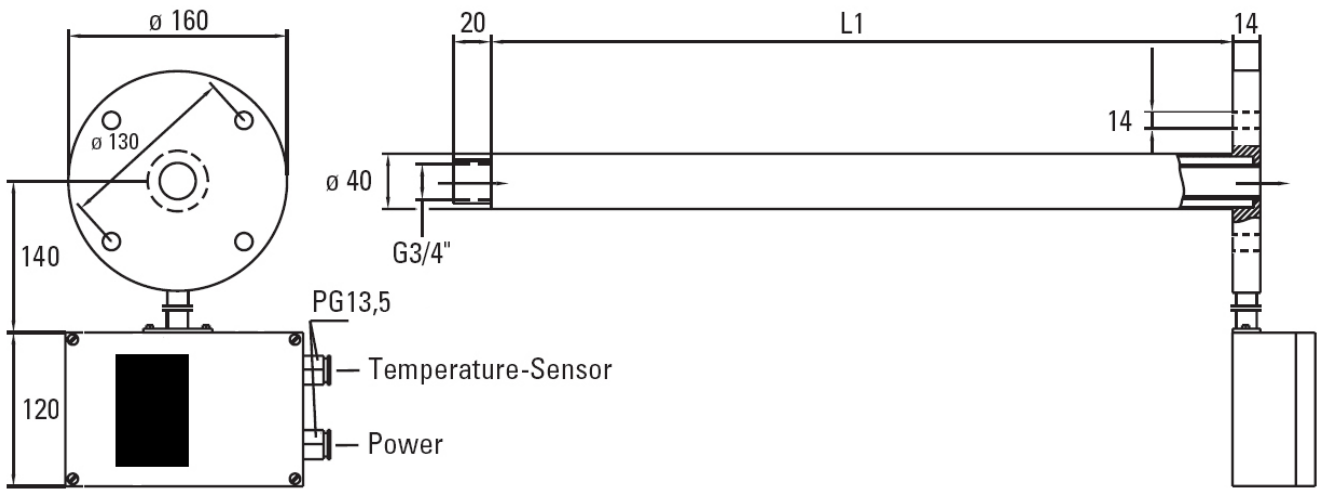

AST 30x series – for portable heated sample probes

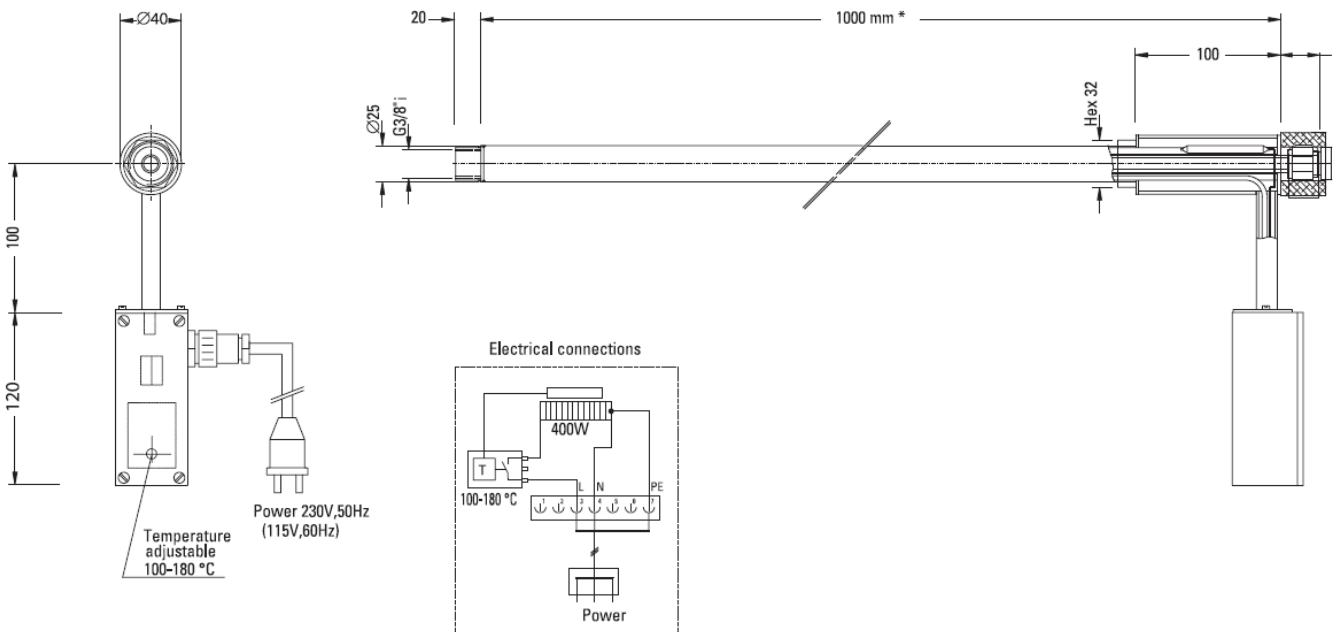



ANKERSMID Top-Filter ATF 18x/50x series

Application

The Ankersmid top-filters are used together with gas sample probes series ASP for continuous gas sampling in processes with increased dust loading. These extra stainless filters can be mounted on top of the sample tubes in case of very high dust levels ($> 10 \text{ g/m}^3$).



Description


The large active surface of the Ankersmid top-filter guarantees a long operating time. Even in case the flow rate of the sample gas is increased, there is only a small difference pressure on the filter matrix between clean gas and crude gas side.

Therefore, the solid particles do not get into the filter's pore structure. They are deposited as filter cake on the filter's surface and cause a prolonged operating time in its property as top-filter. The Ankersmid top-filters series ATF are selected according to the specific application.

The basis for selection are the process parameters, i.e. the gas compounds, dust loading, grain sizes, water vapor saturation, temperature, pressure and gas velocity.

The ATF-filter are equipped with a welded thread connector for moutange into the mounting flange of the gas sample probe. For an optimal sampling position in the process, the top-filters can be mounted to the sample probe via an extension tube series AET. In case of a high velocity of the process gas, shape protection plates series AAS are used in order to protect the top-filters against abrasion.

- For dust loading $> 2\text{g/m}^3$
- Sampling temperature up to **max.600°C**
- Different dimensions
- Great filter surface
- back-purging possible
- Easy mounting

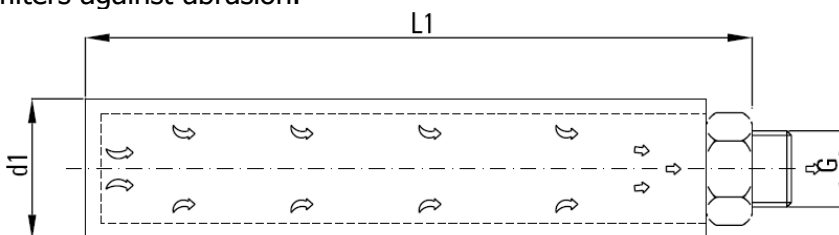

ATF Top-filter type	Tmax	Material Filter connection	Filter Porosity μm	Dust content g/m^3	Internal volume displacer	Back-purging possible	Filter length L1 (mm)	Filter diameter D1 (mm)	Filter connection G
ATF 180	600°C	SS316	5	2 - 10	No	Yes	180	40	3/4"m
ATF 181	600°C	SS316	5	2 - 10	Yes	Yes	180	40	3/4"m
ATF 050	600°C	SS316	5	> 10	No	Yes	500	40	3/4"m
ATF 051	600°C	SS316	5	> 10	Yes	Yes	500	40	3/4"m



ANKERSMID Heated lines

Self-limiting 40°C - 120°C

AHL 010, 011, 012
Fixed PTFE-tube

AHL 016, 017, 018
Interchangeable PTFE-tube

AHL 022, 023, 024
Fixed SS316-tube



* Examples

Application

This electrically heated sample lines series AHL are designed for connecting to all Ankersmid sample elements. The heated line ensures that the gas components in the sample stream remain above their dew point and thereby eliminates the risk of condensation. This is a safe way to transport the sample to a heated analyzer or the special Ankersmid coolers.

The electrically heated sample lines series AHL X are designed to transport sample gas through an explosive zone type 1 or 2, but not zones type 0.

Description

The heated sample lines are manufactured according to the clients specification and completely confectioned in the factory at a fixed length.

The heating element used in this type of heated line is an auto-regulated ribbon. The heated line is secured closely to the sample carrier tube, thus eliminating the occurrence of cold zones or spots in the heated line, and therefore also eliminating the incidence of potential blockage.

We offer a variety of standard lines, which can be fit with many options upon request.


See our price list for all available versions and options.



Compatible to ATEX Definition:

EX II 2G EEXe ma IIC T3

- Protected against explosion group II
- 2G category (zone 1)
- EEx European standard
- e ensured as per DIN EN 60079-7
- ma ensured as per (moulding) DIN EN 60079-18
- IIC gas group (hydrogen)
- T3 temperature class up to 200°C

- **Completely manufactured "ready-to-use"**
- **ONE auto-regulated ribbon heater**
- **Never cold spots**
- **Tube DN 4/6, 6/8 or 8/10 mm**
 - a) PTFE-tube fixed
 - b) PTFE-tube interchangeable
 - c) SS316-tube fixed
-  **Available according to ATEX (AHLX)**



ANKERSMID Heated lines
Self-limiting 40°C - 120°C

Technical data

Operating temperature: +40°C @ 20°C ambient	Tube diameter	Line code (meter)	Beginning and end fitting (1x)
Tube PTFE fixed	DN 4/6mm	AHL 010	AHL 102
	DN 6/8mm	AHL 011	
	DN 8/10mm	AHL 012	




Tube PTFE Interchangeable	DN 4/6mm	AHL 016	AHL 108
	DN 6/8mm	AHL 017	
	DN 8/10mm	AHL 018	



Tube SS316 fixed	DN 4/6mm	AHL 022	AHL 124
	DN 6/8mm	AHL 023	
	DN 8/10mm	AHL 024	



Operating temperature: +80°C @ 20°C ambient	Additional p/n for all diameter	AHL M025	-
Operating temperature: +120°C @ 20°C ambient	Additional p/n for all diameter	AHL M060	-
 Heated sample line in ATEX design	Additional p/n for lines type AHL 010-012 016-018 & 022-024	AHLX 01x AHLX 02x	AHLX 1xx

DN	DN 4/6	DN 6/8	DN 8/10
Outside diameter of inner tube	6mm	8mm	10mm
Corrugated tube outside diameter	42.5mm (Standard) / 42.5mm (ATEX)		
Hard caps outside diameter	47mm (Standard) / 47mm (ATEX)		
Power consumption at +40°C	9W/m	9W/m	9W/m
Power consumption at +80°C	46W/m	46W/m	46W/m
Power consumption at +120°C	63W/m	63W/m	63W/m
Length of connection stud	25mm		
Min. bending radius	270mm		
Max. length manufactured	78m		

Dimension and minimum bending radius (tolerance: length: 2%, diameter: 5%)



ANKERSMID Heated lines

Regulated 200°C / 250°C

AHL 030, 031, 032
Fixed PTFE-tube

AHL 033, 034, 035
Interchangeable PTFE-tube

AHL 036, 037, 038
Fixed SS316-tube



* Examples

Application

This electrically heated sample lines series AHL are designed for connecting to all Ankersmid sample elements. The heated line ensures that the gas components in the sample stream remain above their dew point and thereby eliminates the risk of condensation. This is a safe way to transport the sample to a heated analyzer or the special Ankersmid coolers.

The electrically heated sample lines series AHL X are designed to transport sample gas through an explosive zone type 1 or 2, but not zones type 0.

Description

The heated sample lines are manufactured according to the client's specification and completely confectioned in the factory at a fixed length.

The sample line temperature is to be controlled by a Pt100 temperature controller. The heater used in this type is ONE serial resistance, twisted around the tube. Due to this construction we eliminate the occurrence of cold zones or spots in the heated line, where a potential blockage could occur. We offer a variety of standard lines, which can be fit with many options upon request.


See our price list for all available versions and options.



Compatible to ATEX Definition:

EX II 2G EExe ma IIC T3

- Protected against explosion group II
- 2G category (zone 1)
- EEx European standard
- e ensured as per DIN EN 60079-7
- ma ensured as per (moulding) DIN EN 60079-18
- IIC gas group (hydrogen)
- T3 temperature class up to 200°C

- **Completely manufactured "ready-to-use"**
- **ONE serial heater**
- **Never cold spots**
- **Tube DN 4/6, 6/8 or 8/10 mm**
 - a) PTFE-tube fixed
 - b) PTFE-tube interchangeable
 - c) SS316-tube fixed
-  **Available according to ATEX (AHLX)**
- **Integrated PT100 (Others on request)**
- **External temperature controller required**



ANKERSMID Heated lines

Technical data

Regulated 200°C - 250°C

Operating temperature: +200°C @ 20°C ambient	Tube diameter	Line code (meter)	Beginning and end fitting (1x)
Tube PTFE fixed	DN 4/6mm	AHL 030	AHL 302
	DN 6/8mm	AHL 031	
	DN 8/10mm	AHL 032	




Tube PTFE Interchangeable	DN 4/6mm	AHL 033	AHL 305
	DN 6/8mm	AHL 034	
	DN 8/10mm	AHL 035	



Tube SS316 fixed	DN 4/6mm	AHL 036	AHL 308
	DN 6/8mm	AHL 037	
	DN 8/10mm	AHL 038	



Operating temperature: +250°C @ 20°C ambient	Additional p/n for all diameter	AHL H250	-
 Heated sample line in ATEX design	Additional p/n for lines type 030-038	AHLX 03x	AHLX 30x

DN	DN 4/6	DN 6/8	DN 8/10
Outside diameter of inner tube	6mm	8mm	10mm
Corrugated tube outside diameter	42.5mm (Standard) / 42.5mm (ATEX)		
Hard caps outside diameter	47mm (Standard) / 47mm (ATEX)		
Power consumption at 200°C (fixed inner tube)	100W/m	100W/m	100W/m
Power consumption at 200°C (interchangeable inner tube)	100W/m	125W/m	125W/m
Power consumption at 250°C (fixed inner tube)	125W/m	125W/m	125W/m
Power consumption at 250°C (interchangeable inner type)	125W/m	150W/m	150W/m
Length of connection stud	25mm		
Min. bending radius	270mm		
Max. length manufactured (with 1 heating circuit)	46m at 230VAC (25m at 115VAC)		

Dimension and minimum bending radius (tolerance: length: 2%, diameter: 5%)



ANKERSMID Temperature controller ATC 510/520 for wall-mounting

Application

The ATC 510/520 is a modern microprocessor-based (PID) control device featuring easy handling and a digital display. The clear design of the operator control level facilitates fast and reliable adjustment.

The plug-in device, which is equipped with a grounding-type plug and a multi-pole plug for the consumer unit, can be put into operation immediately.

Description

The electronic temperature controller is mounted in a wall-mounting housing. The temperature sensor input is developed for multiple sensor inputs (standard PT100).

The desired operating temperature can be set by using the respective control keys.

The actual value is indicated via 4-digit display and the controller function via LED.



* Picture may vary

- **In wall-mounting enclosure**
- **Relay contact 10A/20A switching capacity**
- **4-digit LCD indication**
- **Plug-in device**
- **Grounding-type plug for mains connection**
- **7-pin/5-pin Multipole plug output**
- **Quick and easy to operate**




ANKERSMID Temperature controller
ATC 510/520 for wall-mounting

Technical data

Version	ATC 510	ATC 520
Temperature sensor input	PT100 (standard) Pt500, Pt1000, Ni100, PTC1K, NTC10K (B 3435K) thermo-couple type J, K, S, R	
Switching capacity	Nominal 2300W (10A)	Nominal 4600W (20A)
Functions	PID-controller	
Power supply	24-230VAC	
Housing version	Wall-mounting housing	
International protection type	IP 54	
Housing material	Polycarbonate	
Dimensions in mm	151 x 125 x 90 (w x h x d)	
Consumer unit & sensor connection	7-pin multi-pole socket, incl. 2m power cable with grounding-type plug	5-pin multi-pole socket, incl. 2m power cable with grounding-type plug
Indications	LCD-display with 4-digit temperature display in °C (normal operation) as well as display of parameters and entry values during operator mode.	



ANKERSMID Temperature controller ATC 506/508 for wall-mounting

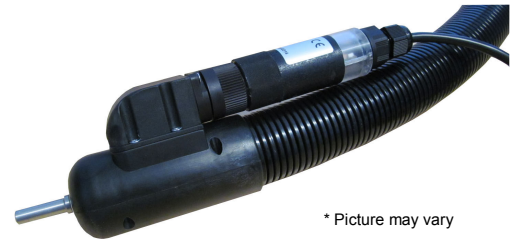

* Picture may vary

Application

The ATC 506/508 is a modern microprocessor-based (PID) control device. The innovative design facilitates an easy operation. The plug-in device, which is equipped with a grounding-type plug and a multi-pole plug for the consumer unit, can be put into operation immediately.

Description

The electronic temperature controller TC 506/508 is especially designed for direct conjunction with heated lines series AHLE but also compatible to any other heated sample line with 7-pin multipole socket. The internal electronic is suitable for multiple sensor inputs (factory setting PT100).

The desired operating temperature is pre-programmed (factory setting +180°C) but can be adjusted via software to any other set-point (0-200°C).

The actual operation mode is indicated via multi-colour LED.

- **Compact design**
- **Relay contact 16A switching capacity**
- **Multi-colour LED indication**
- **Plug-in device**
- **Grounding-type plug for mains connection**
- **7-pin Multipole plug output**
- **Quick and easy to operate**



ANKERSMID Temperature controller
ATC 506/508 for wall-mounting

Technical data

Version	ATC 506	ATC 508
Temperature sensor input	Pt100 (factory setting), Pt1000, thermo-couple type J, K	
Switching capacity	Nominal 1300W (6A) triac	Nominal 700W (6A) triac
Function	PID-control algorithm	
Accuracy class	1	
Power supply	230V/50Hz	115V/60Hz
Housing version	Wall-mounting housing	
International protection type	IP 65	
Housing material	Polycarbonate, Acryl	
Dimensions	Length: 150mm, diameter: 30mm	
Consumer unit & sensor connection	7-pin multi-pole socket, incl. 1.5m power cable with grounding-type plug	
Multi-color status LED indication	Red = heating green = temperature reached red flashing = sensor error/sensor damage/sensor short circuit	



ANKERSMID Temperature controller ATC 600 for rail-mounting

Application

The ATC 600 two-step electronic temperature controller was specifically designed for the control of different heated components.



* Picture may vary

Description

The two-step electronic temperature controller is mounted in a rail mounting housing. The temperature sensor input is developed for a two-wire PT100 sensor and is equipped with a protection against short circuit and sensor breach.

The desired operating temperature can be set by using the respective control keys. Temperatures can be displayed in degrees Celsius or degrees Fahrenheit. The actual value is indicated via three-digit display and the controller function via LED.

- › **In rail mounting enclosure**
- › **Relay contact 10A switching capacity**
- › **Three-digit LCD indication**
- › **Indication selectable for °C or °F**
- › **Protected parameter level**
- › **Data storage in case of power failure**



ANKERSMID Temperature controller
ATC 600 for rail-mounting



Technical data

Version	ATC 600
Temperature control range	adjustable in range -200°C to +600°C, adjusted at works to 0°C to +200°C
Switching capacity	250VAC/10A resistive load with relay contact
Control mode	On-off controller
Temperature sensor input	PT100; 2-conductor with sensor breakage status
Ambient temperature	0°C to +55°C, for close-to-close mounting 0°C - 40°C
Storage temperature	-40°C to +70°C
Switching hysteresis	adjusted at works to 5°C
Accuracy of control	± 0,1% of final value
Electrical connection	terminals 2,5 mm ²
Power supply/ Power consumption	230V +/-10%, 50/60Hz, 2VA
Housing version	Rail-mounting housing EN 50022
International protection type	IP 20 EN60529
Housing material	Polycarbonate
Dimensions in mm	90 (H) x 22,5 (W) x 62(D)
Weight	110gr.
Climatic resistance	≤ 75% rel. humidity average/year without occurrence of dew
Electrical security	DIN EN 61010 part1 excess voltage category III, contamination level 2
Electromagnetic compatibility	EN61326
Interference transmission	class B
Resistance to jamming	industrial requirement
Indications	actual value, 3-digit LCD, switching state relay via LED



ANKERSMID Temperature controller
ATC 600 for rail-mounting

Dimensions

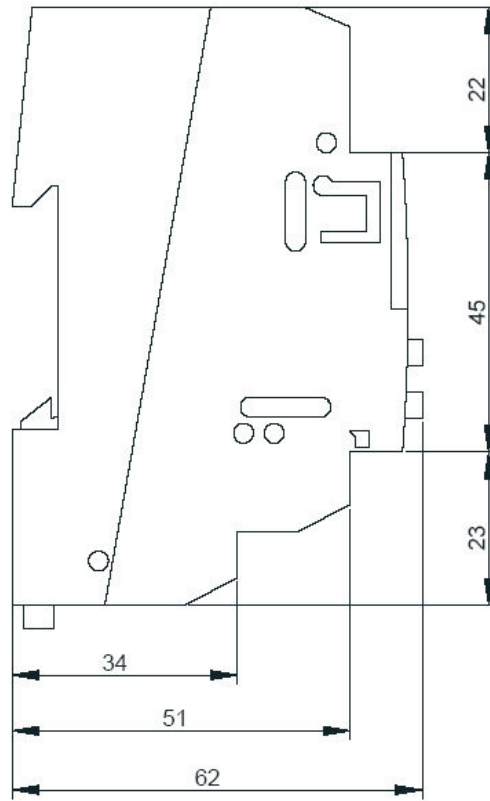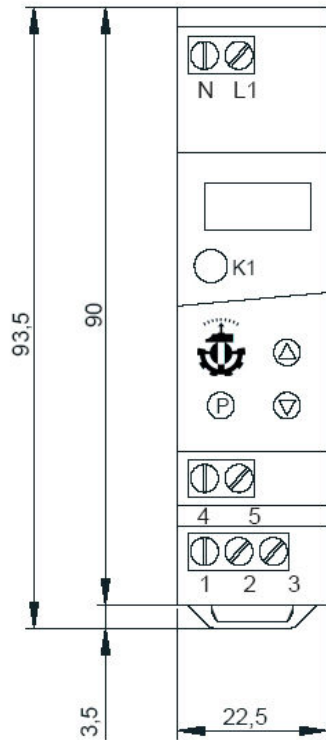

Terminals:

- L1 / N : Power IN
- 4 / 5 : PT100 IN
- 1 : Contact OUT NC
- 2 : Contact OUT MC
- 3 : Contact OUT NO



ANKERSMID Temperature controller ATC 900 ATEX for wall-mounting

Application

The ATC 900 ATEX is a modern Comprehensive solution for controlling and limiting the temperature in areas with potentially explosive gas or dust atmospheres according to zones 1/2 and 21/22, incl. power selector function.

Appropriate for ATEX heated lines and heated hoses.

Description

The electronic temperature controller-limiter unit is mounted in a wall-mounting housing.

The temperature sensor input is developed for 2x PT100.

The desired operating temperature can be set by using the respective control keys.

The actual value is indicated via three-digit display and the controller function via LED.



* Picture may vary

- **In wall-mounting enclosure**
- **Relay contact 25A switching capacity**
- **Approved to zones 1/2 (gas) and zone 21/22 (dust)**
- **Approved to explosion groups IIC hydrogen and IIIC static dust**
- **Appropriate for temperature classes T1, T2, T3, T4, T5, T6**
- **Approval / certified to latest standards**
- **Complete documentation**



ANKERSMID Temperature controller
ATC 900 ATEX for wall-mounting


Technical data

Version	ATC 900 ATEX
Temperature sensor input	PT100 DIN resistance thermometer
Switching capacity	Electronic solid-state relay with 25 A nominal current
Measuring circuit: intrinsically safe	[Ex ib] IIC Uo=6,3 V; Io=22 mA; Po=35 mW max. outer capacitance 1,5 µF max. outer inductance 10 mH [Ex ib] IIB Uo = 6,3 V, Io = 22 mA; Po=35 mW max. outer capacitance 8,2 µF max. outer inductance 10 mH
Ex-marking	⊕ II 2 G Ex e ib [ib Gb] mb IIC T4 Gb ⊕ II 2 D Ex tb IIIC IP6X T90°C Db
Power supply	230VAC (-15% to +10%); 50-60Hz
External fuse	25 A automatic cut out, Type A, B, C (Siemens), or Z, B, C (ABB)
Measuring range	0 ... 450°C
Power input	≤ 11 VA (without load)
Housing version	Wall-mounting housing
International protection type	IP 64 according to DIN EN 60529
Housing material	Aluminum
Dimensions in mm	260 x 160 x 135 (w x h x d)
Weight	6 Kg
Ambient temperature	-20 °C ... +40 °C
Profile connection clamps	Mains input 0,5..6 mm ² (≤ 4 mm ² with ferrules) Load output 0,5..6 mm ² (≤ 4 mm ² with ferrules) Sensors 0,2..4 mm ² (≤ 2,5 mm ² with ferrules) Reset/signal. 0,2..4 mm ² (≤ 2,5 mm ² with ferrules)
Excess temperature protection	Integrated temperature switch (cut-off temperature approx. 90 °C)




ANKERSMID Temperature controller
ATC 900 ATEX for wall-mounting

Dimensions

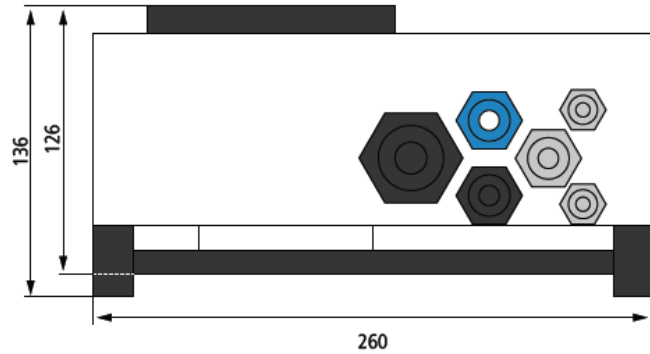

Front view

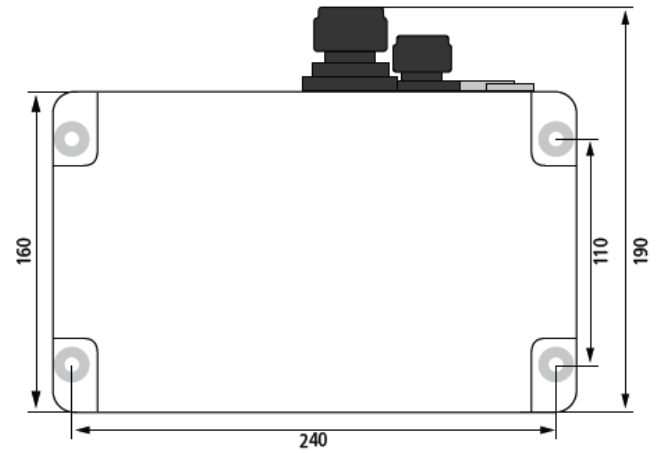

Back view and drilling template

ANKERSMID Compressor cooler

ACC 1xx neo Series

Application

Ankersmid Compressor Coolers are used to lower the dew point of humid gas to avoid condensate entering into the gas analyser.

This unique micro-processor controlled compressor cooler has been designed with a powerful dew point stabiliser. The dew point is set at 4°C but can be changed at any value between 1 and 15°C.

A good and stable gas dew point avoids cross-interference if the analyser is sensitive to H₂O.

Description

The ACC cooler offers precision, safety and long-term stability for extractive analytics. The very low gas dissolution rate is attained owing to the new cooler technology (Patents applied). Both the permanent separation of the condensate from the gas phase, as well as the shorter contact time of the gas in the system, plays important roles in reducing gas dissolution rates.

The new cooler incorporates an advanced structural design with housing suitable for both wall-mounting (standard) and 19"-racks by using optional brackets. The coolers can be integrated into the analysis cabinet without empty space requirements at the side for a cooling air outlet.

The design enables 1 or 2 heat exchangers to be incorporated either at the factory or at a later time, without any problem. The exchangers can be connected in series or parallel following customer requirements.


An electronic system monitors the dew point and controls the integrated fan.

A temperature alarm output is wired to the terminal block incorporated of the cooler housing for a safe connection without disassembling the cooler.

Available for 230VAC and 115VAC power supply.

The ACC cooler is designed especially for:

- Power Plants
- Waste Incinerators
- Cement Manufacturing
- Chemical Production Plants
- Gas Production Plants
- Glass manufacturing
- Timber Processing
- Food Processing

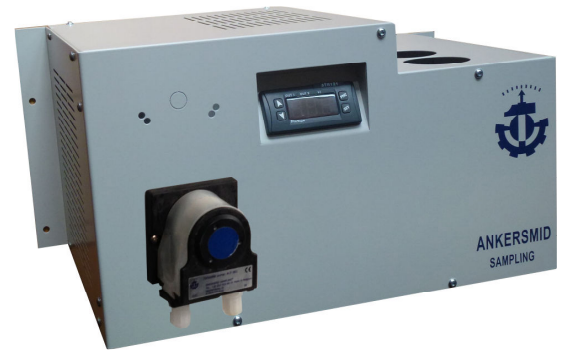

Picture: ACC 1xx/2xx

- **Provide clean dry sample gases to extractive analysers in continuous emission monitoring, process control and engine testing applications**
- **Universal cooler housing for wall-mounting (standard) and 19"-rack version by brackets**
- **Optimise industrial burning processes**
- **Continuously dehumidify gas sample streams**
- **Rapidly separate condensable liquids with a very low dissolution rate**
- **Demountable heat exchanger PFA®-coated**



ANKERSMID Compressor cooler ACC 1xx neo Series

Technical data

Model ACC	1x1 neo	1x2 neo
Number of heat exchanger	1	2
Housing version	Wall-mount (standard) / 19"-rack (with optional brackets)	
Housing color	RAL 7035 (light-grey)	
Dimensions (W x H x D)	443,5 x 220 x 270mm (wall-mount) / 491,5 x 220 x 270mm (19"-rack)	
Weight (approximately)	18 kg	
Operation data		
Gas inlet dew-point	Max. 65°C*	
Gas inlet temperature	Max. 190°C*	
Gas outlet temperature	+1°C +15°C, factory setting: +4°C	
Stability	0,1°C	
Ambient temperature	+5°C to 45°C	
General electrical data		
Mains connection	Plug	
Alarm contact	Free programmable switch-over contact 1NO/1NC, rating: 250V, 16A AC	
Alarm set points	< +2°C / > +10°C	
Protection class	IP20 EN 60529 / EN 61010	
Power supply	230V/50Hz (standard), 115V/60Hz	
Power consumption	95W (steady-state)	
Electrical protection	Fuse F1At (230VAC), F2At (115VAC)	
Total cooling capacity	Max. 445BTU/h ≈ 470kJ/h	
Coolant	R134a	
Model ACC	101	102
Power supply	230VAC, 50/60 Hz	
Model ACC	111	112
Power supply	115VAC, 50/60 Hz	

Data per heat exchanger	
Gas flow	Max. 200l/h*
Material of exchanger body	PFA®-coated
Material of exchanger head	PFA®-coated
Sealing	Viton®
Maximum pressure	10 bar a
Pressure drop	2mbar at 200l/h
Dead volume	35ml
Sample gas inlet	1x 1/4" f NPT
Sample gas outlet	1x 1/4" f NPT
Condensate outlet (HE)	1x 3/8" f NPT
Condensate outlet (pump)	PVDF DN4/6

Maximum values in technical data's must be rated in consideration of total cooling capacity at 25°C ambient temperature and 5°C outlet dew point

PTFE = Polytetrafluoroethylene (Teflon®)

PVDF = Polyvinylidenfluoride


FFPM = Perfluorelastomer (Kalrez®)

PPS = Polypropylenesulphide (Ryton®)




ANKERSMID Compressor cooler
ACC 1xx neo Series

Dimensions

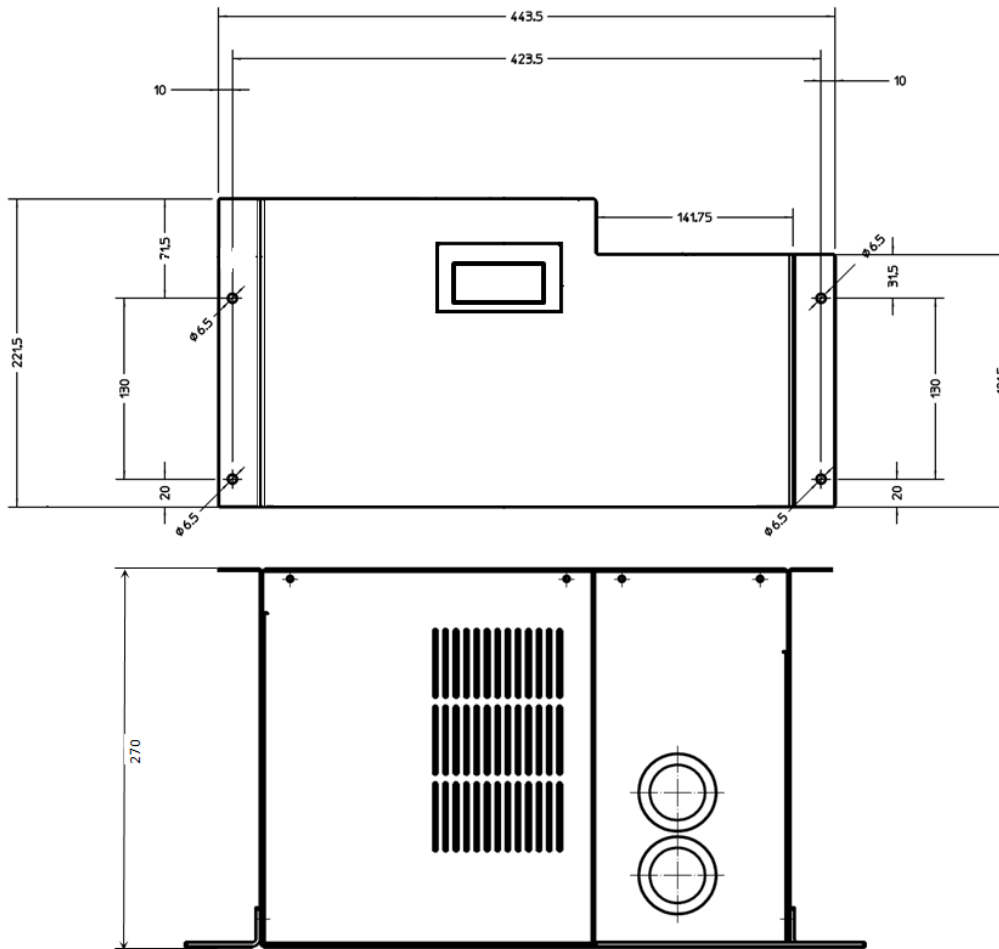

ANKERSMID Compressor cooler
ACC 1xx neo Series

Performance

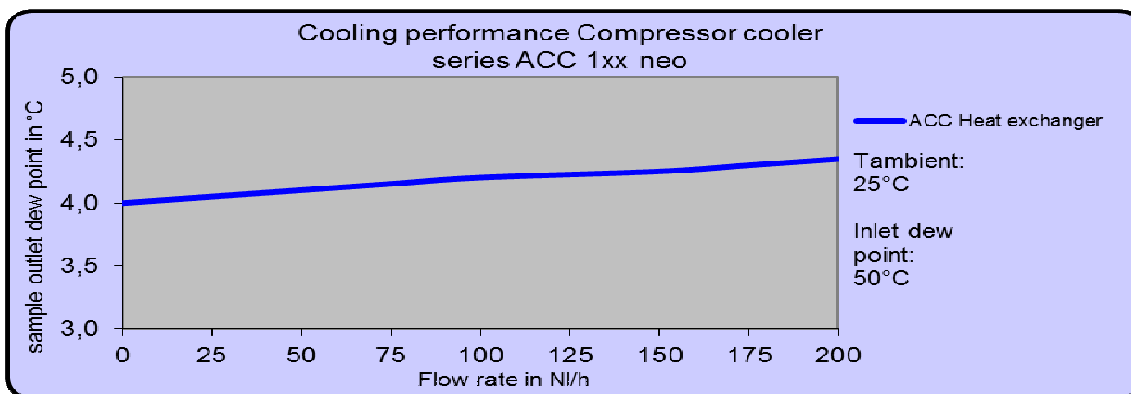

ANKERSMID Compressor cooler

ACC 4xx neo Series

Application

Ankersmid Compressor Coolers are used to lower the dew point of humid gas to avoid condensate entering into the gas analyser.

This unique micro-processor controlled compressor cooler has been designed with a powerful dew point stabiliser. The dew point is set at 4°C but can be changed at any value between 1 and 15°C.

A good and stable gas dew point avoids cross-interference if the analyser is sensitive to H₂O.

Description

The ACC cooler offers precision, safety and long-term stability for extractive analytics. The very low gas dissolution rate is attained owing to the new cooler technology (Patents applied). Both the permanent separation of the condensate from the gas phase, as well as the shorter contact time of the gas in the system, plays important roles in reducing gas dissolution rates.

The new cooler incorporates an advanced structural design with housing suitable for both wall-mounting and 19"-racks. The coolers can be integrated into the analysis cabinet without empty space requirements at the side for a cooling air outlet.

The new design enables up to 4 heat exchangers and peristaltic pumps to be incorporated either at the factory or at a later time, without any problem. The exchangers and pumps can be connected in series or parallel following customer requirements.

An electronic system not only monitors the dew point, but also the ambient temperature. The integrated fan is cooling air temperature dependent controlled.

A temperature alarm output is wired to the terminal block incorporated of the cooler housing for a safe connection without disassembling the cooler.

Available for 230VAC and 115VAC power supply.

The ACC cooler is designed especially for:

- Power Plants
- Waste Incinerators
- Cement Manufacturing
- Chemical Production Plants
- Gas Production Plants
- Glass manufacturing
- Timber Processing
- Food Processing



* Pictures may vary

- **Provide clean dry sample gases to extractive analysers in continuous emission monitoring, process control and engine testing applications**
- **Universal cooler housing for wall-mounting and 19"-rack version by multifunctional assembly brackets**
- **Optimise industrial burning processes**
- **Continuously dehumidify gas sample streams**
- **Rapidly separate condensable liquids with a very low dissolution rate**
- **Demountable heat exchanger PFA[®]-coated**
- **Various options like flow meter and front panel filter to be incorporated into the cooler housing**
- **Peristaltic pump for each heat exchanger incorporated as standard**



ANKERSMID Compressor cooler
ACC 4xx neo Series

Technical data

Model ACC	4x1 neo	4x2 neo	4x3 neo	4x4 neo
Number of heat exchanger	1	2	3	4
Housing version	Wall-mount / 19"-rack			
Housing color	RAL 7035			
Dimensions (HxLxD)	310 x 449 x 320mm			
Weight (approximately)	32 kg			
Data per heat exchanger				
Gas flow	Max. 200l/h*			
Material of exchanger body	PFA [®] -coated			
Material of exchanger head	PFA [®] -coated			
Sealing	Viton [®]			
Maximum pressure	10 bar a			
Pressure drop	2mbar at 200l/h			
Dead volume	35ml			
Sample gas inlet	1x 1/4" f NPT			
Sample gas outlet	1x 1/4" f NPT			
Condensate outlet (HE)	1x 3/8" f NPT			
Condensate outlet (pump)	PVDF DN4/6			
Operation data				
Gas inlet dew-point	Max. 65°C*			
Gas inlet temperature	Max. 190°C*			
Gas outlet temperature	+1°C +15°C, factory setting: +4°C			
Stability	0,1°C			
Ambient temperature	+5°C to 45°C			
General electrical data				
Mains connection	Plug			
Alarm contact	Free programmable contact 1NO / 1NC, rating: 250V, 16A AC			
Alarm set points	< +1°C / > +8°C			
Protection class	IP20 EN 60529 / EN 61010			
Power supply	230V/50Hz (standard), 115VAC/60Hz			
Electrical protection	Fuse F2,5At (230VAC), F6At (115VAC)			
Power consumption	Approx. 193W (steady-state)			
Total cooling capacity	Approx. 900BTU/h ≈ 955kJ/h			
Coolant	R134a			
Model ACC	401 neo	402 neo	403 neo	404 neo
Power supply	230V, 50 Hz			
Model ACC	411 neo	412 neo	413 neo	414 neo
Power supply	115V, 60 Hz			

Maximum values in technical data's must be rated in consideration of total cooling capacity at 25°C ambient temperature and 5°C outlet dew point

PTFE = Polytetrafluoroethylene (Teflon[®])

PFA = Perfluoralkoxy-Polymer

PVDF = Polyvinylidenfluoride

FFPM = Perfluorelastomer (Kalrez[®])

PPS = Polypropylenesulphide (Ryton[®])



ANKERSMID Compressor cooler

ACC 4xx neo Series

Condensate removal

Each heat exchanger is, as a standard fitted with a peristaltic pump type ACP 001 (ASR25). The pump removes all condensate, while ensuring condensate flow- back is impossible.

The pump's 0.25 l/h capacity guarantees a complete condensate removal even at high dew points.

Driven by a synchronous motor, a system of pulleys presses the condensate through a special tube with very long runtime. These pulleys are pressed by 4 springs on the peristaltic tube.

With a speed of 5 rpm, the two PVDF hose pulleys and the Novoprene[®] hose guarantee a good mechanical and chemical resistance with a long life time. Changing the peristaltic tube is a simple procedure that takes only seconds.

Sample gas cleaning

The APF front panel mounting extra-fine filters reliably filter out solids, especially very fine particles, by using a very fine, deep-acting filter element. The large filter surface of this cylindrical filter element guarantees reliable extra-fine filtration and a long service life with low pressure drop.

Reliable filtration of particles down to 0.1 micron occurs in the Teflon-depth filter. A viewing window shows the need for filter changes. This filter, including piping, can be integrated into the front panel of the cooler as an option.

Flow rate control and adjustment

The AFM flow meter consists of a vertical, internally conical Acrylic tube widening towards the top in which a float can move freely upwards and downwards and of the head and bottom piece with an integrated Stainless Steel needle valve.

The sample gas flows upwards through the tube and lifts the float until a radial clearance occurs between the tube wall and the float so that forces affecting the body are in equilibrium. Every position of the float corresponds to a certain flow which can be read on a calibrated scale.

The measuring tube is sealed within the head and bottom part with FPM o-rings, as is the fine adjustment needle valve.

The flow meter is fitted with a fine adjustment valve in the inlet for precise flow value setting.

This flow meter, including piping, is available as option and will be built into the front panel of the cooler by Ankersmid, including all piping.


Equipment





ANKERSMID Compressor cooler
ACC 4xx neo Series

Performance

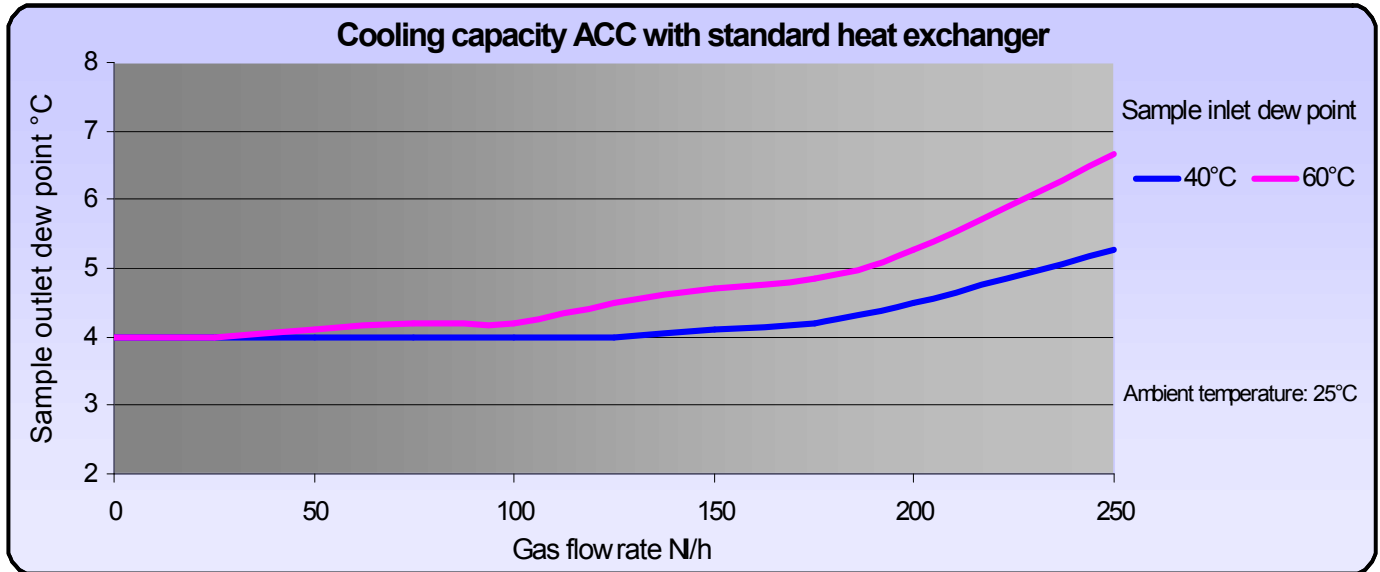



ANKERSMID Compressor cooler ACC 80x/81x Ex Series



* Picture may vary

Application

Ankersmid Compressor Coolers are used to lower the dew point of humid gas to avoid condensate entering into the gas analyser. This unique micro-processor controlled compressor cooler has been designed with a powerful dew point stabiliser. The dew point is set at 5°C. A good and stable gas dew point avoids cross-interference if the analyser is sensitive to H₂O.

Description

The cooler offers precision, safety and long-term stability for extractive analytics. The cooler incorporates a housing suitable for wall-mounting as standard.

The design enables up to 2 heat exchangers (mono or dual gas paths each). The exchangers can be connected in series or parallel following customer requirements.

The controller is self-checking. Significant deviation from the preset is signalled by a status output. A bi-color LED on the front shows 4 different operating conditions.

Condensate is removed either into condensate vessels or by automatic condensate drainers which can be attached to the heat exchangers within the cooler's outer contour.

Available for 230VAC and 115VAC power supply.

- **Provide clean dry sample gases to extractive analysers in continuous emission monitoring, process control and engine testing applications**
- **Optimise industrial burning processes**
- **Continuously dehumidify gas sample streams**
- **Environment-friendly (CFC free)**
- **Intended for use in Potentially Explosive Atmospheres**
- **For use in hazardous area Zone 1/2**



ANKERSMID Compressor cooler
ACC 80x/81x Ex Series



Technical data

Model ACC	8x1 Ex
Number of heat exchanger	1 (standard), max. 2
Number of gas paths	1 (standard), max. 4
Housing version	Wall-mount or stand alone
Housing material	Stainless steel / Polyester
Dimensions (H x W x D)	700 mm x 500 mm x 500 mm
Weight (approximately)	37 kg
Operation data	
Gas outlet temperature	factory setting: +5°C
Dew point stability	±0,5K
Ambient temperature	+0°C to +45°C
Cooling capacity (at 25°C)	> 615 kJ/h (170 W)
General electrical data	
Alarm contact	Voltage-free changeover contact, max. 250VAC/2A, min. 24V/10mA
Alarm set points	<0 / >+10°C
Marking	II 2 G Ex px e mb q [ia] IIC T4 Gb
Power supply	230V/50-60Hz (standard) or 115V/50-60Hz
Fuse	Motor protection switch
Electrical protection	External on installation site
Power consumption	250VA (230VAC), 300VA (115VAC)
Protection class electrically	IP 54
Coolant	R134a
Model ACC	801 Ex
Power supply*	220...240VAC, 50Hz (230V/60Hz on request)
Model ACC	811 Ex
Power supply*	100...115VAC, 50/60Hz
Display	
Status LED with 4 conditions	Green: Temperature in range Green flashing: Temperature in range, compressor is running Red: Temperature off range, cooling operation Red flashing: Cooler stooped or service required




ANKERSMID Compressor cooler
ACC 80x/81x Ex Series

Heat exchanger

	Material	Mono heat exchanger	Dual heat exchanger
Sample gas flow rate Mono max.	PVDF Glass Stainless steel	125 l/h 280 l/h 530 l/h	2x 115 l/h 2x 140 l/h 2x 250 l/h
Dew point sample gas inlet	PVDF Glass Stainless steel	65 °C 80 °C 80 °C	65 °C 65 °C 80 °C
Temperature sample gas inlet limited by temperature class, T4	PVDF Glass Stainless steel		135 °C 135 °C 180 (135) °C
Cooler capacity	PVDF Glass Stainless steel	120 KJ/h 230 KJ/h 450 KJ/h	185 KJ/h 230 KJ/h 450 KJ/h
Operating pressure max.	PVDF Glass Stainless steel	3,0 bara 3,0 bara 160 bara	2,0 bara 3,0 bara 25 bara
Differential pressure (v=150 l/h)	PVDF Glass Stainless steel	8 mbar 8 mbar 8 mbar	15 mbar 5 mbar 5 mbar
Dead volume Mono	PVDF Glass Stainless steel	129 ml 48 ml 69 ml	21/21 ml 25/25 ml 28/25 ml
Sample gas connection	PVDF Glass Stainless steel	DN4/6mm GL14 G1/4" f	DN4/6mm GL14 6mm tube
Condensate outlet on bottom	PVDF Glass Stainless steel	G3/8" f GL25 G3/8" f	DN5/8mm GL14 10mm tube

ANKERSMID Compressor cooler
ACC 80x/81x Ex Series

Dimensions

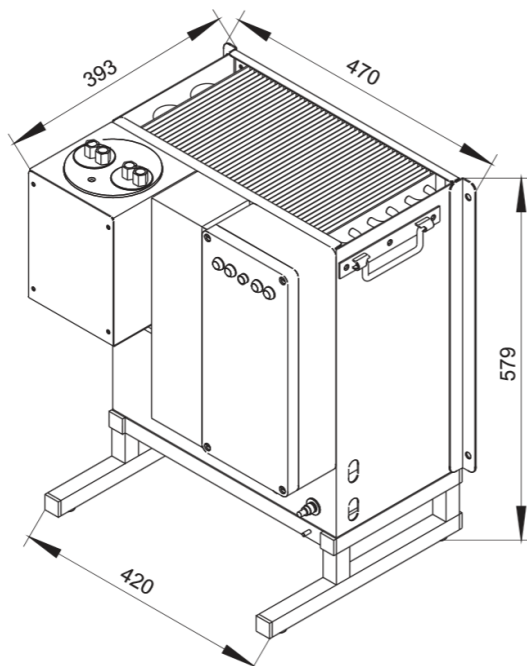



ANKERSMID Compressor cooler ACC 85x/86x Ex Series



Application

Ankersmid Compressor Coolers are used to lower the dew point of humid gas to avoid condensate entering into the gas analyser. This unique micro-processor controlled compressor cooler has been designed with a powerful dew point stabiliser. The dew point is set at 3°C. A good and stable gas dew point avoids cross-interference if the analyser is sensitive to H₂O.

Description

The cooler offers precision, safety and long-term stability for extractive analytics. The cooler incorporates a housing suitable for wall-mounting as standard.

The design enables one heat exchanger (mono or dual gas path). The exchanger can be connected in series or parallel following customer requirements.

An electronic system not only monitors the dew point, but also the ambient temperature.

An isolated temperature alarm output for high and low temperature alarm is included as standard.

Available for 230VAC and 115VAC power supply.



* Picture may vary

- **Provide clean dry sample gases to extractive analysers in continuous emission monitoring, process control and engine testing applications**
- **Cooler housing for wall-mounting**
- **Optimise industrial burning processes**
- **Continuously dehumidify gas sample streams**
- **Environment-friendly (CFC free)**
- **Intended for use in Potentially Explosive Atmospheres**
- **According to Directive 94/9/EC**
- **For use in hazardous area Zone 2**



ANKERSMID Compressor cooler
ACC 85x/86x Ex Series



Technical data


Model ACC	85x	86x Ex
Number of gas paths	1 (standard), max. 2 (with double heat exchanger)	
Housing version	Wall-mount or stand alone	
Housing color	RAL 7035 (light-grey)	
Dimensions (W x H x D)	230 x 300 x 355 mm	
Weight (approximately)	18,5 kg	
Peristaltic pump ASR25 for condensate removal	1 pc. (standard)	2 pcs. (standard)
Data per heat exchanger		
Gas flow	1x 250l/h or 2x 125l/h	1x 500l/h or 2x 250l/h
Material of heat exchanger	PVDF	Stainless steel
Maximum pressure	1,5 bar a	100bar a
Pressure drop	6 mbar	8 mbar
Dead volume	67ml (singer heat exchanger), 55ml (double heat exchanger)	
Sample gas inlet	Tube DN 4/6mm	
Sample gas outlet	Tube DN 4/6mm	
Condensate outlet	Tube DN 10/12mm	
Operation data		
Gas inlet dew-point	Max. 70°C	Max. 80°C
Gas inlet temperature	Max. 140°C	Max. 180°C
Cooler capacity	90W	160W
Gas outlet temperature	factory setting: +3°C	
Dew point stability	±1K	
Ambient temperature	+10°C to +40°C	
General electrical data		
Mains connection	approx. 2,3m open wire ends	
Alarm contact	Voltage-free changeover contact, max. 250VAC/2A, min. 5VADC/5mA	
Alarm set points	<0 / >+10°C	
Protection class	IP 20 (EN60529)	
Marking	Ex II 3G Ex ma IIA T3 Ex II 3D Ex ma IIIB T180°C (IEc respectively EN60079)	
Power supply	220...240VAC/50Hz (standard) or 100...115VAC/60Hz	
Electrical protection	External on installation site, fuse characteristic C; 230VAC 6A; 115VAC 10A	
Power consumption	190 VA (depending on configuration, ambient temperature & load)	
Coolant	R134a	



ANKERSMID Compressor cooler
ACC 85x/86x Ex Series



Dimensions

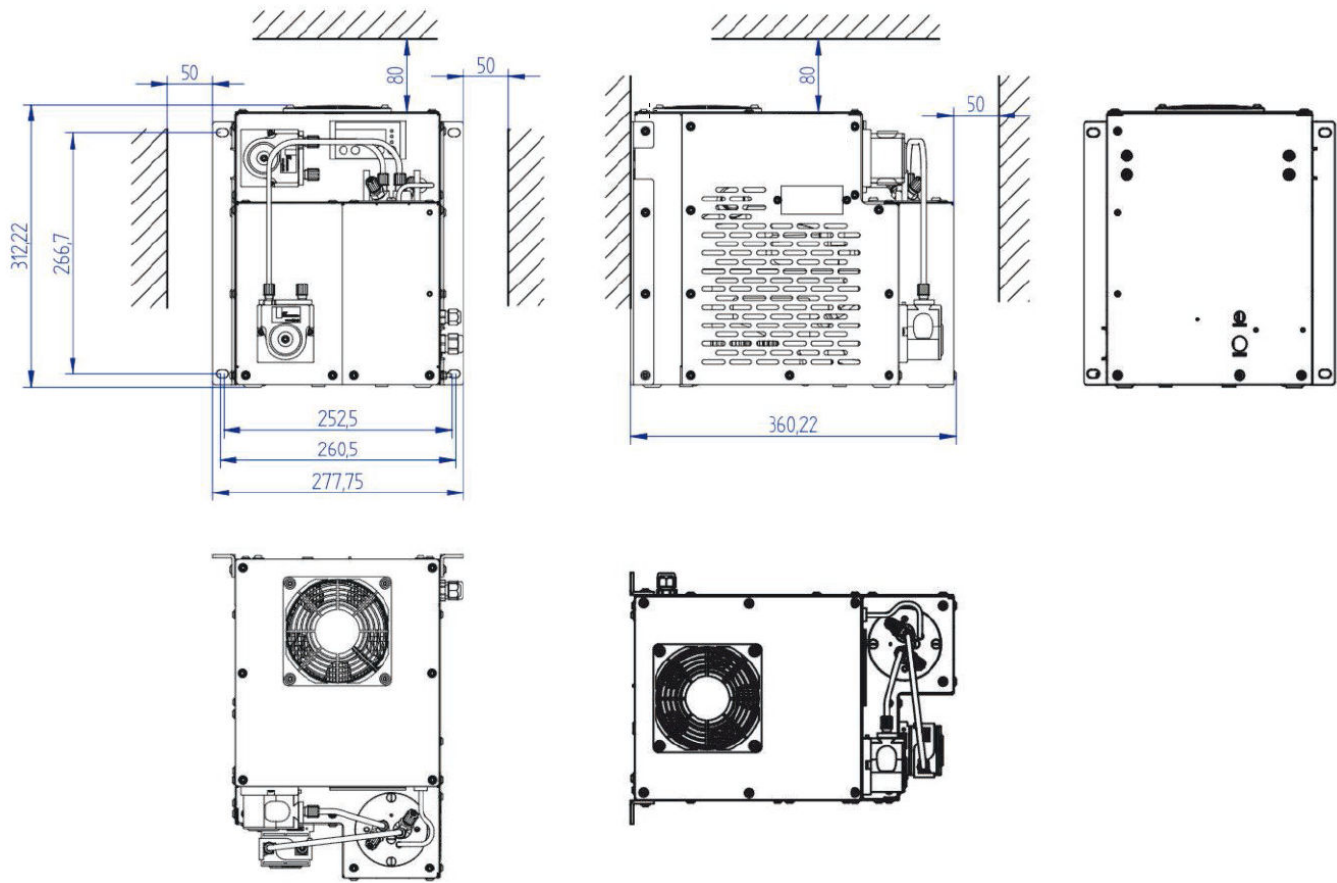



ANKERSMID Peltier cooler APC 14xx/15xx/16xx Series

Application

Ankersmid Peltier Coolers are used to lower the dew point of humid gas to avoid condensate entering into the gas analyser.

A good and stable gas dew point avoids cross-interference if the analyser is sensitive to H₂O.

Description

This unique microprocessor controlled Peltier Cooler has been designed with a powerful dew point stabiliser. The dew point is set at 4°C but can be changed at any value between 1 and 15°C. The condensate that is formed should be removed by a peristaltic pump, automatic drain or collection vessel.

The heat exchanger is demountable and PFA[®]-coated.

The digital controlled cooler has many control and warning features like programmable alarms, mA-output, digital inputs and Modbus or RS485 communication.


The alarm status changes when the temperature deviates by ± 3 °C from the set point.

Available for 230VAC and 115VAC power supply.


Extra Features

Ankersmid's electronically controlled Peltier cooler incorporates a unique design of demountable heat exchangers. This versatile design creates many possibilities. One of the important available features is the humidification of calibration gases to avoid volumetric errors.

Humidification is achieved with a special inlet for liquids. During calibration the heat exchanger dries out due to the dry calibration gas; this volumetric change is important for reference measurements. Injection of liquid during calibration can avoid this issue.

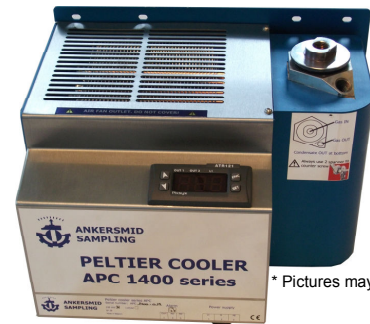

* Pictures may vary



- **Special demountable heat-exchanger with unique design**
- **Humidified heat-exchanger for calibration cross-interference compensation**
- **Digital controlled high stable outlet dew point $\pm 0,1^{\circ}\text{C}$**
- **Ambient temperature up to $+50^{\circ}\text{C}$**
- **Alarm contact**
- **Optional digital communication Modbus/RS485**
- **Power supply 115/230VAC**
- **Universal housing for 3 different versions; 1x 200NI/h, 2x 200NI/h or 1x 350NI/h**
- **Isolation cap for head exchanger head to avoid condensation**



ANKERSMID Peltier cooler

Technical data

APC 14xx/15xx/16xx Series

Model APC xxxx	14x3	15x3	16x3
Number of heat exchanger	1	2	1
Housing version	Stainless steel/Aluminum anodized, Wall-mounting		
Dimensions (HxLxD)	200 x 280 x 190mm		
Data per heat exchanger			
Gas flow rate	1x 200NI/h max.	2x 200NI/h max.	1x 350NI/h max.
Sealing	Viton®	Viton®	Viton®
Maximum pressure	10 bar a	10 bar a	10 bar a
Pressure drop	3mbar at 200NI/h	3mbar at 200NI/h	5mbar at 350NI/h
Dead volume	35cm ³	35cm ³	100 cm ³
Sample gas inlet	1x 1/4" f NPT	1x 1/4" f NPT	1x 1/4" f NPT
Sample gas outlet	1x 1/4" f NPT	1x 1/4" f NPT	1x 1/4" f NPT
Condensate outlet	1x 3/8" f NPT	1x 3/8" f NPT	1x 3/8" f NPT
Material of gas wetted parts	PFA®		
Operation data			
Gas inlet dew point	Max. 50°C		
Gas inlet temperature	Max. 190°C		
Gas outlet temperature	+1°C ... +15°C, factory setting: +4°C		
Total cooling capacity	Max. 245kJ/h		
Stability	0,1°C at ambient temperature 20°C		
Ambient temperature	+5°C to 45°C		
Electrical data general			
Mains connection	Electrical terminals 2,5mm ² / Cable gland 2 x PG13		
Alarm contact	Free programmable contact 1NO / 1NC, rating: 250V, 16A AC		
Alarm set points	< +2°C / > +10°C		
Protection class	IP20 EN 60529 / EN 61010		
Electrical protection	Fuse 1,6A		
Power consumption	2 Peltier elements á 34W		
Weight	4,0 kg	4,6 kg	4,5 kg
Model APC			
	1403	1503	1603
Power supply	230VAC, 50/60Hz		
Model APC			
	1413	1513	1613
Power supply	115VAC, 50/60Hz		


Maximum values in technical data's must be rated in consideration of total cooling capacity at 25°C ambient temperature and 5°C outlet dew point

PTFE = Polytetrafluoroethylene (Teflon) PVDF = Polyvinylidenfluoride
FFPM = Perfluorelastomer (Kalrez) PPS = Polypropylenesulphide (Ryton)



ANKERSMID Peltier cooler
APC 14xx/15xx/16xx Series

Performance

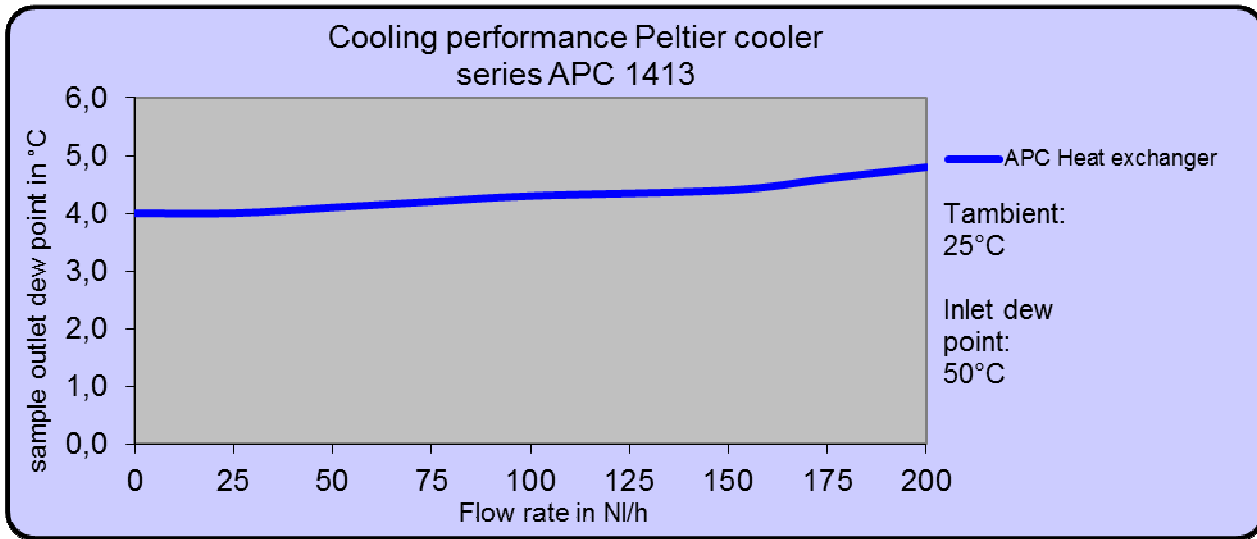



ANKERSMID Ambient cooler AAC 15x/16x/ Series

Application

Ambient coolers are designed to be used e.g. pre-cooler or for use in applications where the sample outlet dew point is not necessary to be stable at a specific temperature (f. e. all electrical Ankersmid coolers are set to +4°C).


Description

By lowering the temperature of a sample gas, condensate liquid will be formed while passing through the heat exchanger. Condensate drops will be formed and descended to the bottom of the vessel. This condensate liquid can be removed by an optional incorporated peristaltic pump.

The unit can furthermore be ventilated by a permanent operating electronic fan.

The ambient cooler is installed on an Aluminum mounting plate to be used as wall-mounting version.

Available for 230VAC and 115VAC power supply.

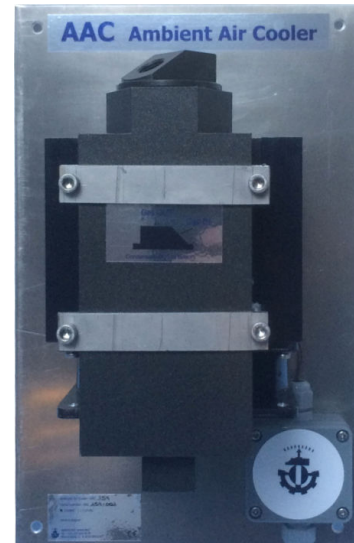

* Example picture AAC 154

- **Special demountable heat-exchanger with unique design**
- **Gas wetted parts made of PFA®**



ANKERSMID Ambient cooler
AAC 15x/16x/ Series

Technical data

Model AAC	
Number of heat exchanger	1
Mounting plate	Aluminum, Wall-mount
Dimensions (w x h)	AAC 160/260: 450 x 350mm AAC 150/154/250/254: 225 x 350mm
Data per heat exchanger	
Material of gas wetted parts	PFA®
Sealing	Viton®
Sample gas inlet	1/4" f NPT
Sample gas outlet	1/4" f NPT
Condensate outlet	3/8" NPT
Maximum pressure	10 bar a
AAC 150/154/160	
Gas flow rate	200NI/h
Dead volume	35cm ³
Pressure drop	2mbar at 200NI/h
AAC 250/254/260	
Gas flow rate	350NI/h
Dead volume	100cm ³
Pressure drop	5mbar at 350NI/h
Operation data	
Ambient temperature	+5°C to +45°C
Option	
Fan included	AAC 154/254
Fan + peristaltic pump included	AAC 160/260
Electrical data	
Mains connection	Electrical terminals 2,5mm ² / Cable gland 1 x PG11
Protection class	IP20 EN 60529 / EN 61010
Power supply	115-230V, 50/60Hz

PTFE = Polytetrafluoroethylene (Teflon®)
 PVDF = Polyvinylidenfluoride
 PFA = Perfluoralkoxy-Polymere



ANKERSMID Condensate separator ACS 0x0 Series

Application

The Ankersmid universal separator series ACS are used to separate condensate from saturated sample gases.

Description

The condensate separator for gas- / liquid separation consists of standard parts of the modular designed universal filter series ACS.

The separator heads are equipped with a second G1/4" thread closed by a blind plug.

The sample gas is lead through the vertical drilling of the element holder to the lower part of the separator. The phase break is ensured by turning the flow direction of the gas stream by use of gravity and a decrease of the flow rate.

The PTFE version of the ACS can be heated up to 180°C.

The glass body separator version enables the user a visual control of the function from the outside. The optimal position of the O-ring guarantees a sure sealing between the separator body and the separator head.

The separator inlet and outlet can be rotated a 180°C on the wall mounting bracket thus enabling an easy adjustment to local circumstances.

In line with application requirements, the drainage process of the condensate may be completed with an externally installed condensate vessel, condensate trap or a peristaltic pump from the Ankersmid Sampling portfolio.



- **Reliable separation of gas and condensate**
- **Second inlet connection possible**
- **Different material combinations**
- **Head out of PVDF, PTFE or stainless steel**
- **Body out of Duran glass or stainless steel**
- **Function visible in versions with glass body**




ANKERSMID Condensate separator
ACS 0x0 Series

Technical data

Universal Condensate separator	ACS 010	ACS 020	ACS 030
Materials: Separator head, element holder, O-Ring, body	PVDF, FEP, Duran® glass	SS316, FPM, Duran® glass	SS316, FPM
Operating temperature, max.	+100°C	+160°C	+180°C
Storage temperature	-30°C to 100°C		
Operation pressure, max.	At 20°C 5bar a (2bar a when using GL-adapters)	At 20°C 5bar a (2bar a when using GL-adapters)	At 20°C 200bar a At 180°C 50bar a
Dead volume	80cm ³		
Mounting	Wall-mounting with mounting bracket, vertical mounting position		
Gas connections	G1/4" f		
Liquid drainage connection	GL25-12 mm		1/4" f NPT
Weight, approx.	0,4kg	1,0kg	1,5kg

ANKERSMID Condensate separator
ACS 0x0 Series

Dimensions

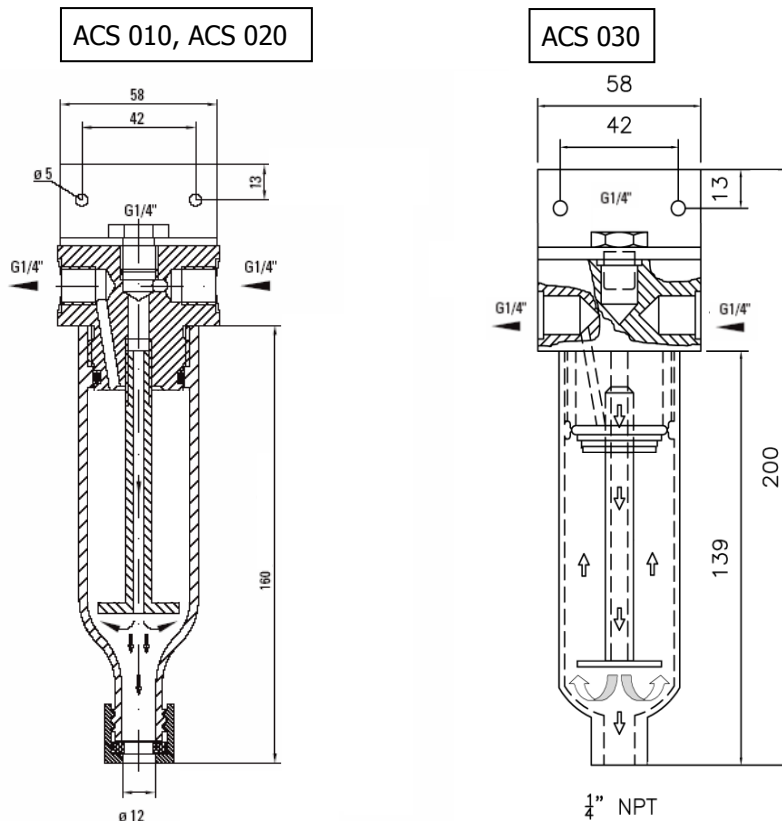



ANKERSMID Automatic liquid drain ALD 0x0 Series

Application

The Ankersmid liquid drain **ALD** is used in gas conditioning systems where condensate must be drained after cooling the gas. Liquid drains remove liquid continuously and automatically without wasting air or gas. In addition to drainage of the system, liquid drains provide:

- Trouble-free operation with minimal need for adjustment or maintenance
- Reliable operation even in the presence of dirt, grit and oil
- A long operating life time
- Minimal air loss

Over pressure is required to operate the liquid drainage function.

Description

The **ALD 010** automatic liquid drain's operation principle is gravity. The ALD's casing, float, valve and valve-seat are made of stainless steel.

The outlet valve is controlled by a lever mechanism. The float closes the condensate outlet via the lever mechanism with the valve tip. Due to the rising condensate level the outlet is released by the buoyancy of the float.

The **ALD 020** series separators with automatic condensate drain, offers an additional lateral side gas connection so this device can be used as separator.



* Picture may vary

- **Save condensate removal and separation**
- **Completely made out of stainless steel**
- **For high pressure and temperature applications**
- **High drain capacity**




ANKERSMID Automatic liquid drain
ALD 0x0 Series

Technical data

Automatic liquid drain	ALD 010	ALD 020	Mounting clip
Material	Stainless steel 304, 316		PE
Operating temperature	0°C to +200°C		-20 to +90 °C
Storage temperature	-50°C to +200°C		-30 to +110 °C
Operation pressure, max.	1 to 19bar abs.		
Function	Specific gravity min. 0,5kg/dm ³ , at 1 bar abs.		
Mounting	Vertical mounting position with bracket		
Capacity	160 l/hr H ₂ O, at 1bar abs. and 20 °C		
Condensate IN	1/2" f NPT		
Condensate OUT	1/2" f NPT		
Sample gas IN	-	G1/4" f	
Sample gas OUT	-	1/2" f NPT	
Weight, approx.	0,8kg		0,05kg

ANKERSMID Automatic liquid drain
ALD 0x0 Series

Dimensions

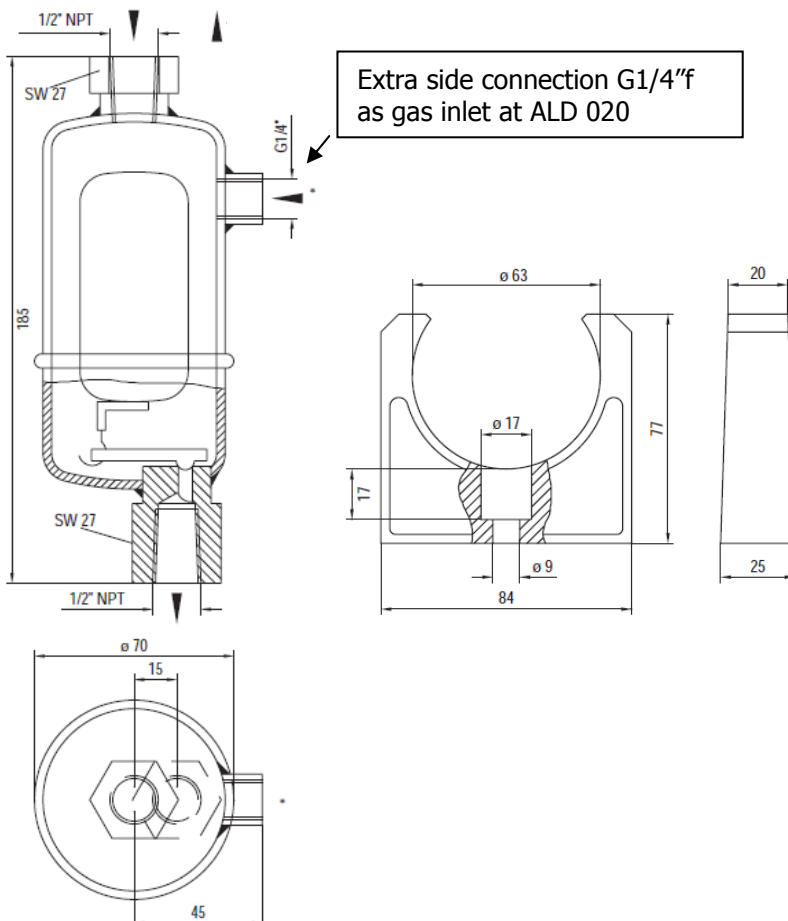

ANKERSMID Condensate vessel

ACV 0x0 Series

Application

The liquid collection vessel **ACV 0X0** is specially designed for applications where automatic condensate removal is difficult. When using a peristaltic pump for automatic condensate removal, a sudden surge of liquid can be hard to handle. In these cases the condensate collection vessel can be used as a reservoir or buffer vessel.

For safe operation, the overflow GL25/12 of the condensate vessel ACV 010 can be equipped with a liquid-level sensor and alarm.

Description

The Ankersmid liquid collection vessel ACV 010 is made of industrial quality glass. This ensures high corrosion resistance and the ability to see inside the vessel. A GL25-12 mm clamp connector is provided as condensate inlet.

The outlet valve is a PTFE stopcock, ensuring easy access and hermetic sealing. All contacting parts are made out of glass and PTFE.

A wall-mounting plate is supplied as part of standard delivery.

The liquid Alarm Sensor is optional; the electronic of the sensor sends an alarm to the control room or opens a valve (optional) to drain the liquid out.

See more about our liquid sensors ALS on chapter 3-8.

-Vessel with other liquid capacities or materials on request -



- **Very corrosion resistant**
- **Liquid level always visible**
- **Different tube connections possible**
- **Level alarm possible**
- **With integrated outlet cock**



ANKERSMID Condensate vessel
ACV 0x0 Series

Technical data

Condensate vessel	ACV 010	ACV 020	ACV 030	ACV 040
Material	Glass	PVC	PVDF	PTFE
Operating temperature	0 to +80°C	0 to +50°C	0 to +120°C	0 to +140°C
Storage temperature	-15°C to +65°C			
Operation pressure, max.	2bar	0,5bar	10bar	6bar
Capacity	+/- 1Ltr			
Over all dimensions (wxhxd)	160 x 310 x 180	160 x 310 x 135	160 x 310 x 135	160 x 310 x 135
Connections	1x GL25-12 Manual valve	3x G1/4" f 2x G1/2" f	2x G1/4" f 1x G1/2" f	2x G1/4" f 1x G1/2" f
Overflow	1x GL25-12	-	-	-
Weight, approx.	+/- 1kg	+/- 0,5kg	+/- 0,5kg	+/- 1kg



ANKERSMID Liquid alarm sensor

ALA 002, ALA 003

Application

A liquid sensor is used in gas sample conditioning/systems as a security alarm in case of condensate breakthrough.

Coolers, water-stops and automated drains are some of the Ankersmid components used for condensate evacuation. The performance of these components is monitored with a liquid alarm sensor. The liquid alarm will report any breakthrough of condensate and thus protect liquid-sensitive optical analyzers or analytical cells from moisture damage. The alarm sensor can be set to shut of a pump or activate a solenoid valve for protection when tripped by moisture detection.

Description

The Ankersmid ALA 002 sensor works on the **principle of the detection of a change in internal reflection**. When a liquid is disposed on the outside lens of the sensor the reflection will be changed and detected by the sensor. The transparent dome contains an LED and an optical sensor. An alarm is generated by the electronic module ALA 102 with a potential fuse contact.

The ALA 003 sensor works on the principle of **electrical conductivity**. When liquid comes in contact with the sensor's two electrodes, a small current is measured and the alarm is given. (Min conductance: 40µmS/cm). The electrodes are mounted under a vertical gas path that – due to gravity - projects the smallest droplet onto the electrodes. An alarm is generated by the electronic module ALA 101 with a potential fuse contact.



- **Safe detection of very small quantities**
- **High chemical resistance**
- **Sensor also used with:**

Compressor coolers	ACC
Peltier coolers	APC
Condensate separators	ACS
Condensate vessels	ACV
Universal filters	AUF
Material filters	AAM
Portable systems	APS/ASS
- **Suitable electronic alarm modules: ALA 101, ALA 102**



ANKERSMID Liquid alarm sensor
ALA 002, ALA 003

Technical data

Model	ALA 002
Connection cable	3m, \varnothing 4,2 mm, 3-core
Pressure	0 - 4bar g
Flow	0 - 1000l/h
Operating temperature	Max. +80°C
Gas connections	\varnothing 12mm
Material of gas wetted parts	PTFE, Polysulphone
Mounting position	Vertical
Insertable length* ¹	15mm
Output sink current* ²	@ 25°C: 10mA max.
	@ 80°C: 3mA max.
Response time	50 μ s
Supply current	15mA nominal @ 5V DC
Supply voltage	5V DC - 12V DC
Operation mode	User defined single point on/off switch
Ambient IR light limit	10mW/cm ² in operation
Weight	40gr

Model	ALA 003
Connection cable	3m, \varnothing 4,2 mm, 2-core
Pressure	0 - 6bar g
Flow	0 - 1000l/h
Operating temperature	Max. +80°C
Gas connections	\varnothing 8mm
Material of gas wetted parts	Stainless steel, platinum
Mounting position	Vertical
Insertable length* ¹	10mm
Electrical conductivity	>50 μ S/cm
Weight	50gr

*1 Other lengths possible

*2 The output sink is intended as a TTL compatible output signal for interfacing to logic systems

ANKERSMID Liquid alarm electronics

ALA 101, ALA 102

Application

The electronic controllers ALA 101 and ALA 102 are used for feeding and signal processing of the liquid alarm sensors ALA 002 and ALA 003.

These liquid sensors are used in gas sample conditions/systems as a security alarm in case of condensate breakthrough.

Coolers, water-stops and automated drains are some of the Ankersmid components used for condensate evacuation. The performance of these components is monitored with a liquid alarm sensor. The liquid alarm will report any breakthrough of condensate and thus protect liquid-sensitive optical analyzers or analytical cells from moisture damage. The alarm sensor can be set to shut of a pump or activate a solenoid valve for protection when tripped by moisture detection.

Description

Two electronic controllers are available, ALA 101 and ALA 102, both for rail-mounting.

The main application for these electronics is detecting of conductive and non-conductive liquids in combination with the liquid alarm sensors ALA 002 and ALA 003.

Furthermore the electronics can be used for control of the level of conductive liquids.

Selectable options allow for this control to be achieved either through a filling operation or through an emptying operation, and in either case "positive logic" is used.



ALA 101

ALA 102

* Pictures may vary

- LED indicator
- 35 mm rail mounting (EN 60715)



ANKERSMID Liquid alarm electronics
ALA 102


Technical data

Model	ALA 101, ALA 102
Contact configuration	1 CO (SPDT)
Rated current/Maximum peak current	16/30A
Rated voltage/Maximum switching voltage AC	250/400V
Rated load AC1	4,000VA
Rated load AC15 (230 V AC)	750VA
Single phase motor rating (230 V AC)	0.55kW
Breaking capacity DC1: 30/110/220 V A	16/0.3/0.12
Minimum switching load	500mW (10V/5mA)
Standard contact material	AgCdO
Nominal voltage (UN)	230VAC (optional 115VAC)
Rated power AC/DC	2.5 VA (50Hz)/1.5W
Electrical life at rated load AC1	100 · 10 ³ cycles
Electrode voltage	10V AC
Insulation between supply/contacts/electrode (1.2/50 µs)	6kV
Ambient temperature	-20...+60°C
Protection category	IP20
Insulation	Impulse (1.2/50 µs)
between supply and contacts	6 kV
between electrodes, Z1-Z2 and supply	6 kV
between contacts and electrodes	6 kV
between open contacts	1.5 kV
Current absorption on Z1 and Z2	< 1mA
Power lost to the environment	
without contact current	1.5W
with rated contact current	3.2W
Max cable length between electrode and relay	200m



ANKERSMID Liquid alarm electronics
ALA 101, ALA 102

Dimensions

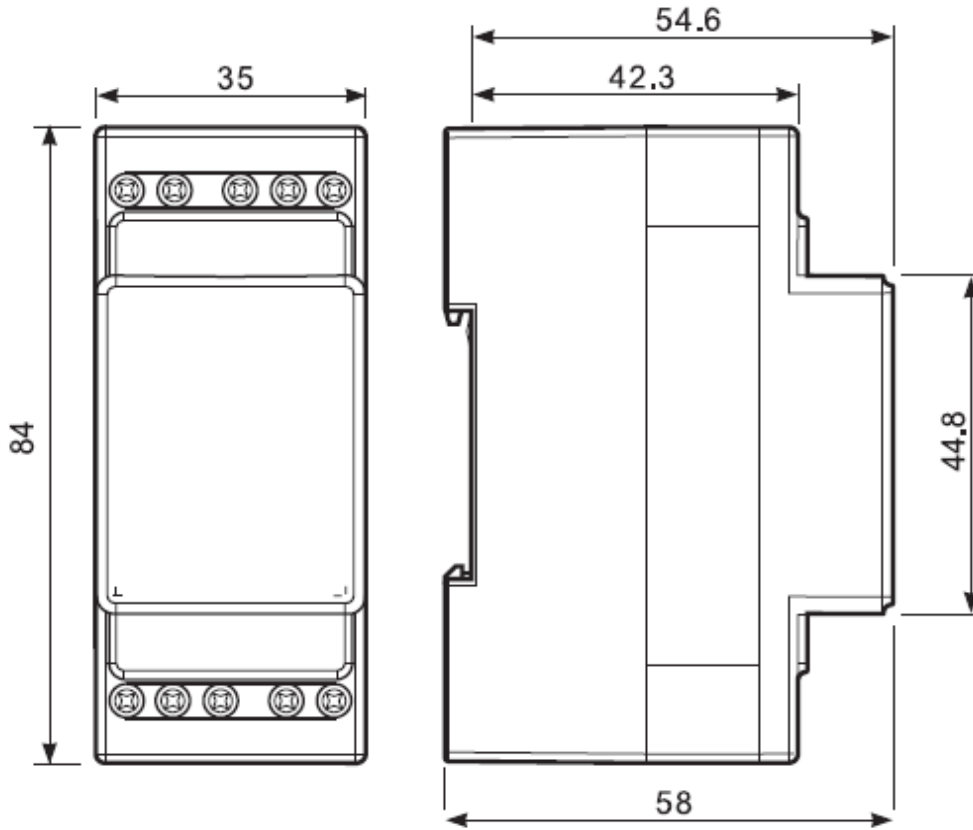

Picture ALA 101, ALA 102 Dimensions

ANKERSMID Universal filter

AUF Series

Application

Ankersmid Universal Filters are known as a reliable technique for the separation of particles from gas, ensuring a flow of clean gas to the analyzer. Filter housings in a variety of materials and standard dimensions are available.

The design of the filter and filter housing also ensures that any liquids present in the gas will be separated from the gas. Liquids are collected in the bottom of the filter-housing.

Due to its universal standard dimensions and functionality, the filter elements can also be used with any commercially available filter housings. The filters are easily replaced without the use of any additional tools.

Where needed, a liquid sensor or liquid drain can be installed at the bottom of the filter housing tube.


Description

The AUF modularity offers the following selection:

- Variety of filter element materials: PTFE, Ceramics, SS316, glass-fiber
- Elements with lengths of 75 or 150 mm
- PVDF, PTFE or Stainless Steel head
- Glass or Stainless Steel filter body
- Closed or outlet at the bottom (for condensate alarm)

A glass filter body offers the benefit of determining the extent of soiling of the filter from the outside at a glance.

A special bracket is available to click the filters on the Ankersmid Modular System, ensuring quick (no drilling required) installation and easy rearrangement of the filters and gas lines connecting the individual components.

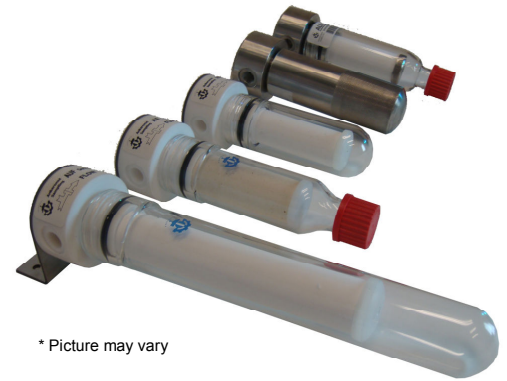

* Picture may vary

- **Universal in use**
- **Modular construction**
- **High variety of materials**
- **Deep-acting filter element**
- **Reliable separation of solids**
- **Wall-mounting**
- **Easy maintenance**



ANKERSMID Universal filter AUF Series

Technical data

AUF Universal filter	
Length of filter element	75mm / 150mm
Sample connections: Gas inlet/-outlet	3x G ¼" f (1x closed)
Condensate connection	GL25-12mm for glass body / NPT ¼" f for SS-body
Pressure at 20°C	Max. 5bar abs. for Glass body without drain / Max. 50bar abs. for SS-body (20bar abs. at +180°C)
Pressure with GL-connection adapter	Max. 2bar abs.
Stagnant space	65cm ³ for filter 75mm / 190cm ³ for filter 150mm
Filter surface	70cm ² for filter 75mm / 140cm ² for filter 150mm
Materials:	
Head	PVDF, PTFE, stainless steel 316L
Filter elements	Ceramics, PTFE, stainless steel, Glass-fiber
Body	Duran [®] glass, Stainless Steel, PTFE
Seals	FPM (head), PTFE/Silicone (GL-connection)
Temperature of ambient or sample	Max. 100°C (PTFE) / 180°C (stainless steel)
Mounting method	Wall-mounting / panel mounting
Weight	+/- 0,4kg for PVDF & PTFE-head + 75mm glass body +/- 1,5kg for SS-head + 75mm SS-body


PVDF = Polyvinylidenfluoride
PTFE = Polytetrafluoroethylene (Teflon[®])




ANKERSMID Universal filter
AUF Series

Dimensions

**Filter unit without drain,
for filter element 75mm (150mm)**

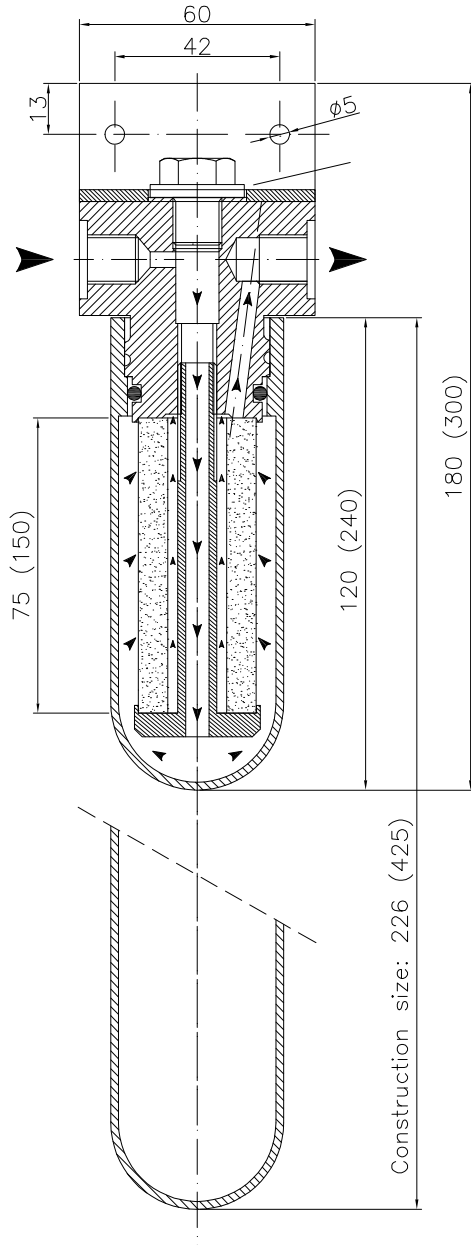

**Filter unit with drain,
for filter element 75mm (150mm)**

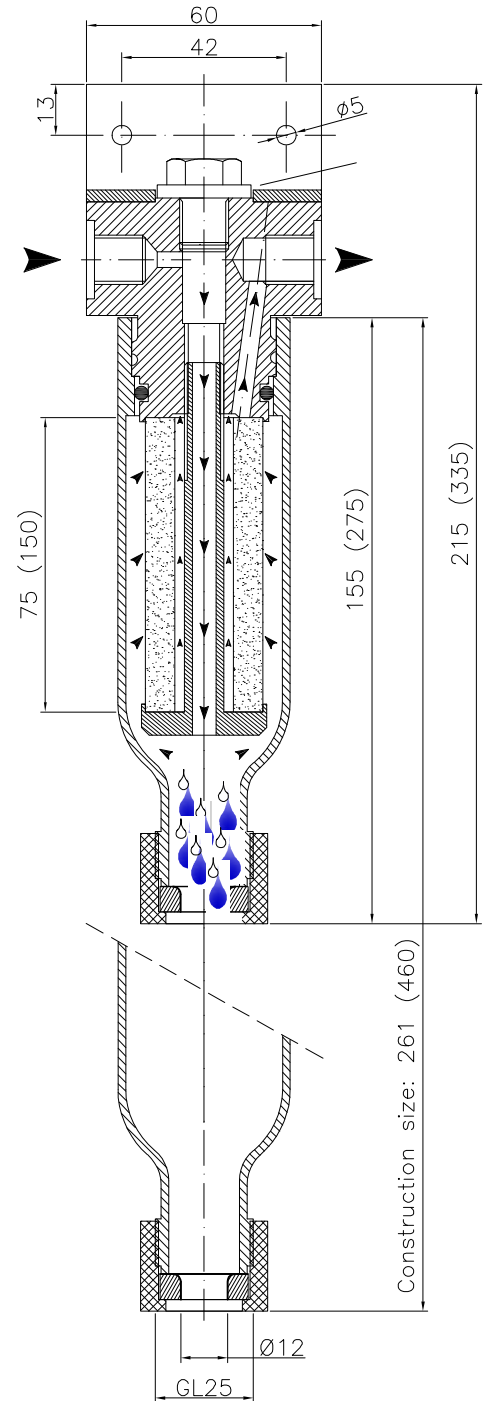

ANKERSMID Adsorption material filter AAM Series

Application

Ankersmid Universal Filters are known as a reliable technique for the adsorption of components in a gas stream that cause interferences in the gas measurement.

The design of the filter and filter housing ensures that any liquids present in the gas will be separated and collected in the bottom of the filter-housing.

The AAM series are based on the elements of the AUF universal filter series.

Due to its universal standard design, the filters can be used with various adsorption cartridges and, if needed, also be fitted with a liquid sensor.

Description

Gas flows into the filter body by one of two inlets in the standard filter head. The gas flows out of holes in the lower part of the filter and then passes through the adsorption material to exit again at the head of the filter housing.

The modular design is suitable for the following:

- **Cartridges filled with different types of adsorption materials like active-coal, Purafil[®], Silica gel[®] etc.**
- **Cartridges with lengths of 75 or 150mm**
- **Head and cartridge made of PVDF or PTFE**
- **Filter body made of Duran[®] Glass**
- **Bottom closed or with GL25-connection**

No tools are needed to replace the cartridge.

The filter series AAM 053/054 including a filter body with bottom glass frit and filled with glass balls creates a huge surface for maximum contact of the gas and aerosols with its liquid. The condensed liquid can be separated or extracted at the outlet (bottom) when extra absorbent is needed, or injection by a peristaltic pump can be effectuated through the second inlet port.

The filter unit can be rotated about 180° in the holder for wall mounting or Ankersmid Modular System. This allows for a flexible adaptation of in- and outlet to local conditions.



- **Universal in use**
- **Modular construction**
- **Cartridges can be filled with different kind of adsorption materials**
- **Wall-mounting**
- **Easy maintenance**



ANKERSMID Adsorption material filter
AAM Series

Technical data




Length of adsorption cartridge		75mm, 150mm
Sample connections: Gas inlet/-outlet		3x G1/4" f
Condensate connection		GL25
Pressure at 20°C		Max. 5 bar abs
Stagnant space		65cm ³ for 75mm-cartridge / 190cm ³ for 150mm-cartridge
Filter surface		70cm ² for 75mm-cartridge / 140cm ² for 150mm-cartridge (efficient surface depending on filling)
Materials:	Head	PVDF (standard) or PTFE
	Cartridge	PTFE
	Body	Duran [®] Glass
	Seals	FPM (head)
PTFE/Silicone (GL-connection)		
Temperature of ambient or sample		Max. 100°C (standard)
Mounting method		Wall-mounting / panel mounting

Various Adsorption materials	Components to be interrupted	Cross sensitive against
Active charcoal	Vapour of solvents or essential oil	SO ₂ , CO ₂ , CL ₂ , NH ₃
Calcium hydroxide	CO ₂	SO ₂ , CL ₂ , H ₂ O
Eisenberger Masse	Aerosols	HF
Silica-gel	Water vapour	SO ₂ , NH ₃ , HCL, CO ₂ , Cn Hm
PURAFIL II	SO ₂ , SO ₃ , NH ₃ , CS ₂ , H ₂ S	C ₂ H ₂ , C ₂ H ₄ , CH ₄ O
Sodium-calcium	CO ₂	SO ₂ , CL ₂ , H ₂ O



ANKERSMID Adsorption material filter
AAM Series

Dimensions

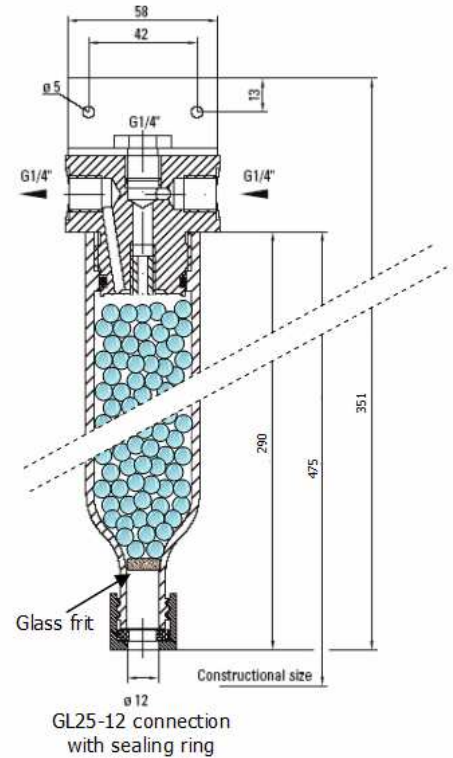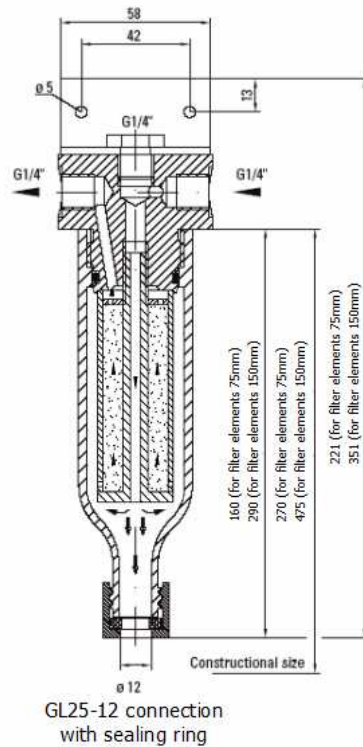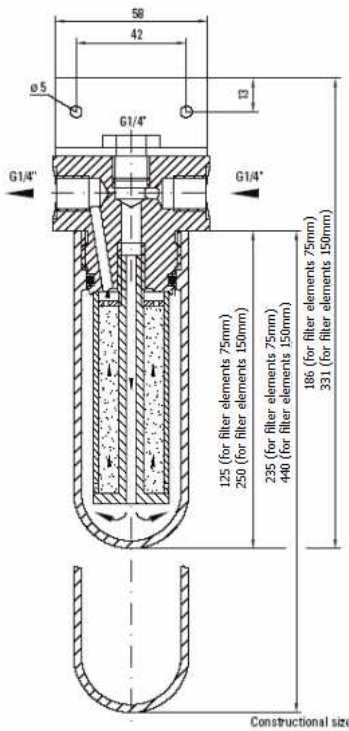



ANKERSMID Ambient air filter

AAF 051, AAF 052 &
AAF 053 with splash-proof socket

Application

The Ankersmid Ambient Air Filter AAF 051/AAF 052/AAF 053 is used for the filtration of ambient air in gas monitoring systems. The main applications are in ambient air monitoring and in air conditioning systems.

Description

The variety of construction design of the ambient air filters AAF 051 / AAF 052 / AAF 053 allows for a perfect adaptation to local situations.

Filter body and filter elements are available in various materials and filter porosities;

- AAF 051 with 2µm PTFE filter element
- AAF 052 / AAF 053 with 2µm glass-fiber filter element

Other filter elements are available on request.

The open construction shows the contamination of the filter element at a glance, and allows for an easy filter element replacement without tools.

The filter is mounted to the wall by means of two screws in the filter flange.

The version AAF 053 is equipped with a splash-proof socket.



- **Super-fine filtration**
- **Large active filter surface**
- **Various materials available**
- **Easy mounting**
- **Easy maintenance**



ANKERSMID Ambient air filter

Technical data


AAF 051, AAF 052 &
AAF 053 with splash-proof socket

AAF Ambient air filter	
Length of filter element	75mm
Sample connections: Gas inlet/-outlet	3x G 1/4" (1x closed)
Filter surface	70cm ²
Materials	PVDF (filter head & filter element holder)
Filter element	Ceramics, PTFE, stainless steel, Glass-fiber
Ambient temperature	Max. 100°C
Mounting method	Wall-mounting / panel mounting
Weight	Approx. 0,4kg

ANKERSMID Adsorption material filter

Dimensions

AAM Series

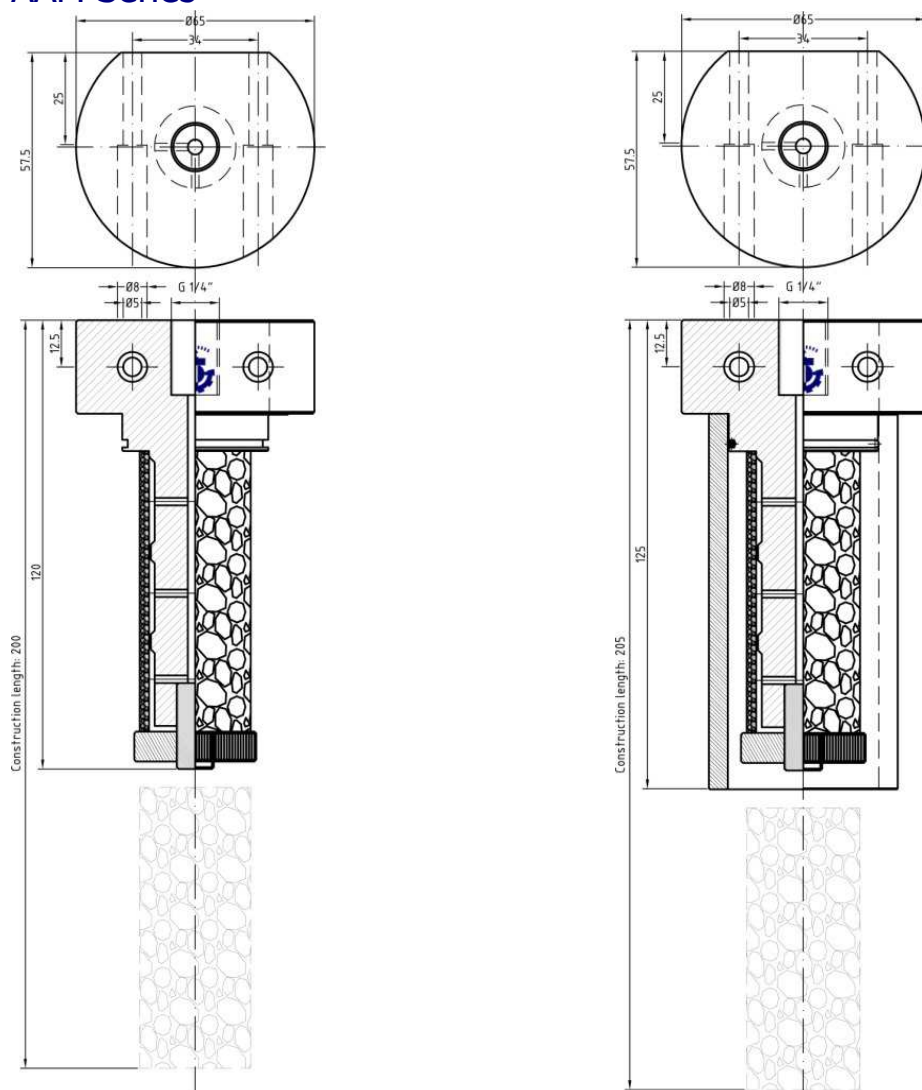



ANKERSMID Humidifier AHU 001, AHU 002

Application

The Ankersmid Humidifier controls the humidity of the gas sample stream. The Humidifier is used to wet calibration gases to ensure these gases undergo an identical cycle through the conditioning set-up.

In this set-up, the calibration gases enter the cooler saturated at a stable dew point. Calibration gases with water-soluble components must not be passed through the humidifier.

Description

The Ankersmid Humidifier consists of a standard filter component. The glass body version has a volume of 70ml.

The gas passes a bubbler that boosts the humidifying result. The humidifier's glass body enables the control of the liquid level without dismantling the body. No tools are required for refilling the humidifier. An o-ring guarantees tightness between the head and the glass body.

For special applications, the humidifier can be provided with a GL25-12 connection at the bottom of the glass body.

Over-pressure at the outlet or under-pressure at the inlet of the humidifier must be avoided, to avoid liquid flow into the gas inlet.

A special bracket is available to click these filters on the Ankersmid Modular System, eliminating the need for drilling and screwing.

The humidifier can be rotated about 180° in the holder for wall mounting or Ankersmid Modular System. This allows for a flexible adaptation of in- and outlet to local conditions.



* Pictures may vary

- **Easy refilling**
- **Direct control of the liquid level**
- **Optimum humidifying effect**
- **Small stagnant space**
- **Wall-mounting**
- **Easy maintenance**




ANKERSMID Humidifier
AHU series

Technical data

AHU Humidifier	AHU 001	AHU 002
Length of filter element	75mm	
Connections: Gas inlet/-outlet	3x G 1/4" f (1x closed)	
Additional connection	-	GL25-12 at bottom
Flow rate	Max. 100l/h	
Materials	PVDF (head, connector) FPM (tube, o-ring) Glass (bubbler, body)	
Content	Approx. 70ml	
Operating temperature	-20°C to +80°C	
Ambient temperature	-30°C to +110°C	
Operating pressure	max. 4 bar g at 20 °C	
Mounting method	Wall-mounting / panel mounting	
Weight	Approx. 0,3kg	

ANKERSMID Humidifier
AHU Series

Dimensions

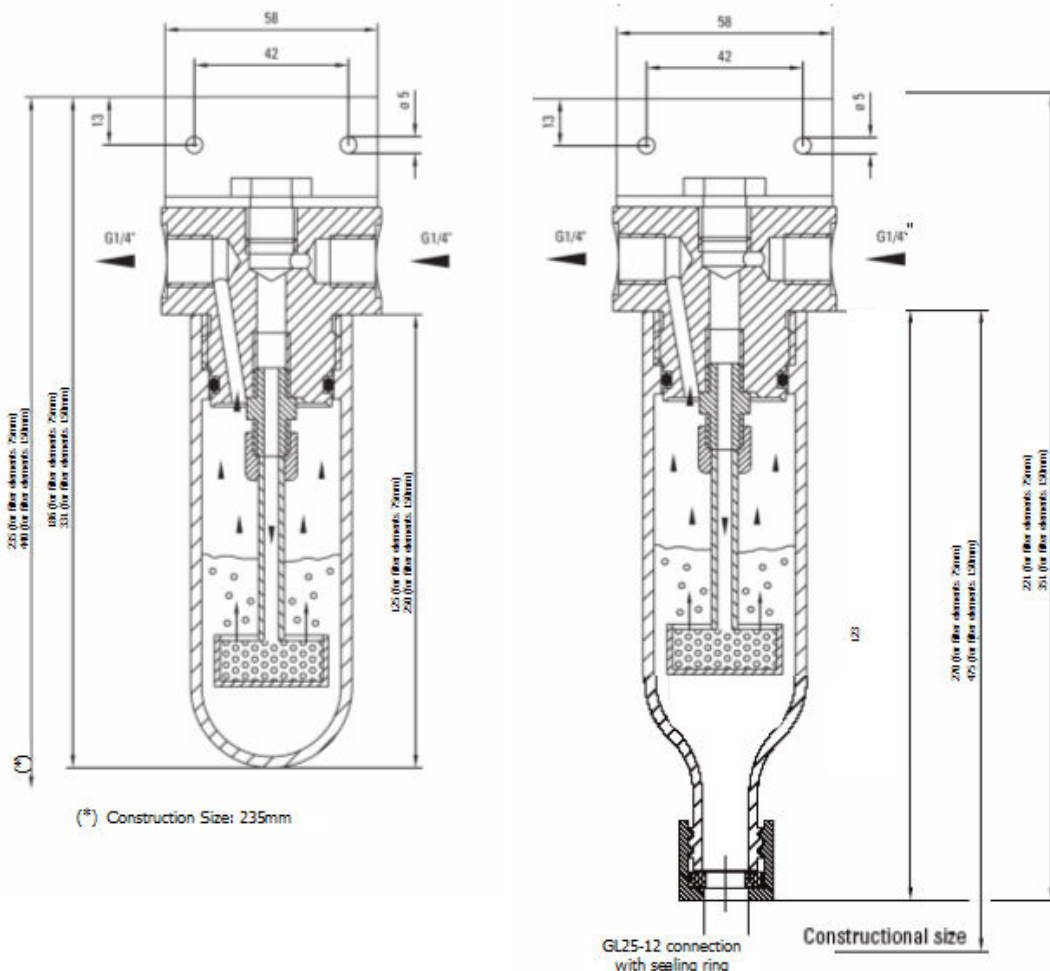



ANKERSMID Wash bottle AWB Series

Application

The Ankersmid wash bottle serves different purposes. First of all, the wash bottle can wash out sample gases. The second application is its role in maintaining a constant pressure upstream of the analyzer by establishing a constant differential pressure with respect to the atmosphere by using the second inlet.

Description

The ANKERSMID wash bottle features components from our universal filter range.

The gas passes a bubbler which creates a very intensive washing effect in any liquid absorbent. No tools are required for easy filling or liquid replacement. The tightness between the glass body and the head is guaranteed by an O-ring.

The Ankersmid wash bottle is also available with an optional GL25-connection (bottom) of the glass body or with GL18-connection (bottom) and GL25-connection (side).

A special bracket is available to place these filters on the Ankersmid Modular System.

The wash bottle can be rotated about 180° in the holder for wall-mounting or Ankersmid Modular System.

This allows a flexible adaptation of in- and outlet to local conditions.



* Pictures may vary

- **Chargeable with a variety of absorbents**
- **Easy change of absorbents**
- **Condition of liquid visible from outside**
- **Optimum out-washing effect**
- **Also for constant pressure upstream the analyser**



ANKERSMID Wash bottle

Technical data


AWB Series

Sample connections: Gas in/-outlet		3x G1/4" f (standard)
Condensate connection		Bottom GL25 (optional) Bottom GL18, side GL25 (optional)
Flow rate		Max. 250l/h
Pressure at 20°C		Max. 5 bar abs
Materials:	Head	PVDF (standard) or PTFE
	Body	Duran [®] Glass
	Seals	FPM (head) PTFE/Silicone (GL-connection)
Temperature of ambient or sample		Max. 100°C (standard)
Mounting method		Wall-mounting / panel mounting / Ankersmid Modular System (AMS)

ANKERSMID Wash bottle

Dimensions

AWB Series

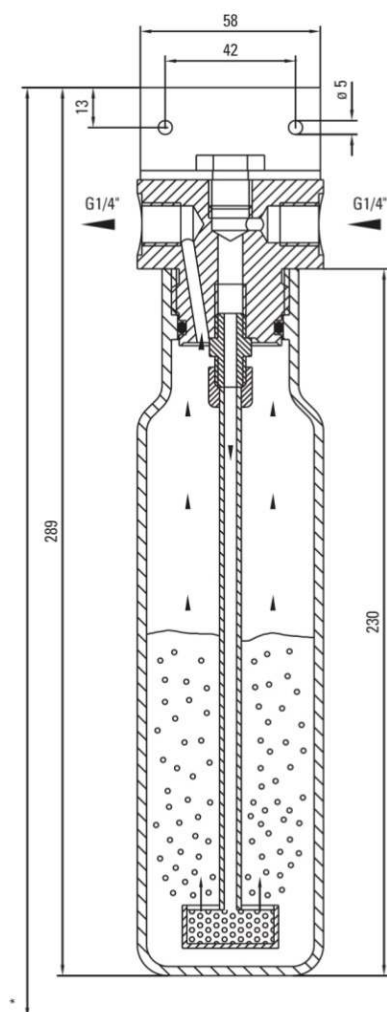

* recommended constructional size 400

Picture: AWB 010

ANKERSMID Fluid particle filter

AFP Series

Application

The Ankersmid aerosol/coalescence filter is suitable for filtration of fluid particles of all types and is recommended for sample gases with an acid dew point above 100°C. Application examples are measurements in flue gas of heavy oil and black coal combustions.

The filter separates the aerosols (very fine fluid particles) which still pass the gas cooler. The most effective position of the filter is downstream the sample conditioning close to the flow meter of the analyser. For additional system protection we provide the version with integrated hydrophobic diaphragm, working as a liquid stop.

Description

The filter element of the Ankersmid aerosol/coalescence filter is constructed in two sections with a flow direction from the inside to the outside of the filter element. The inner, very fine, glass-fiber layer binds the fluid particles suspended in the gas and leads them together with the gas flow to the outer, larger layer. On their way through the filter element, the very fine fluid particles accumulate with others and form droplets. The vertical flow direction and the force of gravity cause the droplets to drip into the filter pot.

The filter element remains fully effective even when completely saturated with fluid. If it is not affected by solid particles, the lifetime is nearly unlimited. The compressed Micro-Fibers are made with binding of PVDF in order to prevent influences on the sample gas.

A version equipped with an integrated liquid stop for water and water identical liquids is available. The modified filter element clamp has a protective hydrophobic diaphragm. In case the sample conditioning system does not work proper, the filter will stop the liquid in front of the filter outlet.

The condition of the filter is visible through the glass body without opening the filter. The separated acid mist can continuously be discharged with an external mounted peristaltic pump (option) connected by the GL25 adapter. No tools are required to change the filter element. The optimized position of the O-ring always guarantees a safe sealing of the filter body to the filter head.

A special bracket is available to place these filters on the Ankersmid Modular System.

The filter can be rotated about 180° in the holder for wall-mounting or Ankersmid Modular System.

This allows a flexible adaptation of in- and outlet to local conditions.



* Picture may vary

- **High separation rate of 99,9999% for particles > 0,1µm**
- **Optional liquid stop (hydrophobic membrane) for analyzer protection**
- **Visible condition of filter element from outside**
- **Easy change of filter element**
- **Wall-mounting**






ANKERSMID Fluid particle filter
AFP Series

Technical data

Model AFP	
Separation rate	99,99% or particles > 0,1 µm
Flow rate	Max. 300l/h
Pressure	Max. 2bar abs
Gas temperature	Max. 80°C
Connections	G1/4" f (gas inlet, gas outlet), GL25 (condensate outlet)
Materials	PVDF (filter head), PTFE (filter element holder) Duran® glass (body) Glass-fiber (filter element)

ANKERSMID Fluid particle filter
AFP Series

Dimensions

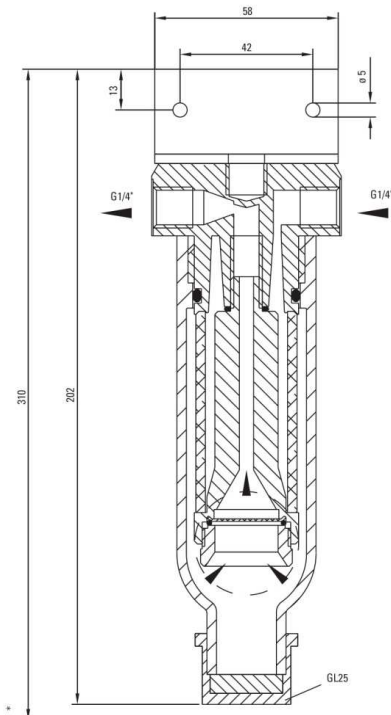

* Constructional size



ANKERSMID Panel filter APF Series

Application

The APF front panel mounting reliably extra-fine filters solids, in particular very fine particles, from the gas stream for gas conditioning applications. The APF uses a very fine, deep-acting filter element that removes particles larger than 100 nanometer from the gas stream. The large filter surface of the cylindrical filter element guarantees reliable extra-fine filtration and a long service life with low pressure drop.

The APF extra-fine filter was primarily developed for 19" front-plate mounting equipment, as is evident from the APF's small size that is suited to flat-design equipment.

Description

Special features of the APF front panel mounting filter are flat design, low stagnant space, simple construction and assembly as well as universal usability.

The condition of the filter can be seen immediately from outside through the filter glass without opening the filter fitting. No tools are needed for changing the filter element; here, the optimum positioning of the sealing O-ring always guarantees reliable sealing between filter glass and filter body.

The gas connections are located at the back in the filter body. The inlet of the measuring gas can be turned by 180° at the front ring attachment so that a flexible adjustment to local conditions is possible when assembling.

Corresponding tube connectors can optionally be supplied on request.



* Picture may vary

- **Flat design**
- **Small stagnant space**
- **Simple construction**
- **Simple assemble**
- **Easy change of filter element**
- **Universal usability**




ANKERSMID Panel filter APF Series

Technical data

Model APF	APF 010	APF 020
Filter porosity	0,1µm	2µm
Materials	PTFE, Viton®, glass, PVDF	
Connections	2x G1/4" f	
Pressure	max. 4bar g	
Sample temperature	max. 80°C	
Ambient temperature	max. 80°C	
Filter surface	50cm ²	
Dead volume	30ml	
Weight	Approx. 280g	
Type of mounting	Front-panel mounting	


PTFE = Polytetrafluoroethylene (Teflon®)
PVDF = Polyvinylidenfluoride

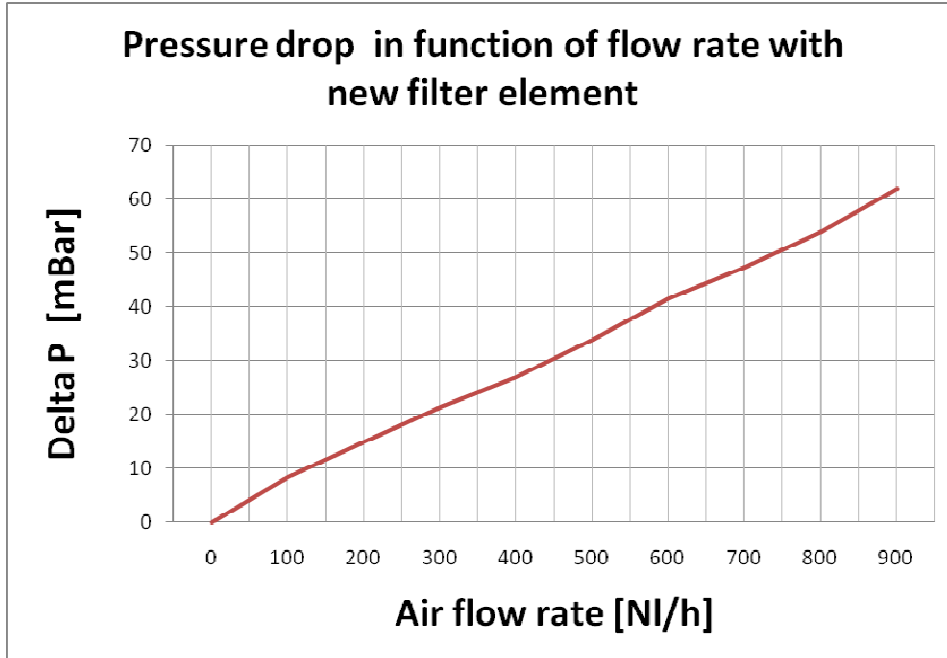





ANKERSMID Panel filter
APF Series

Dimensions

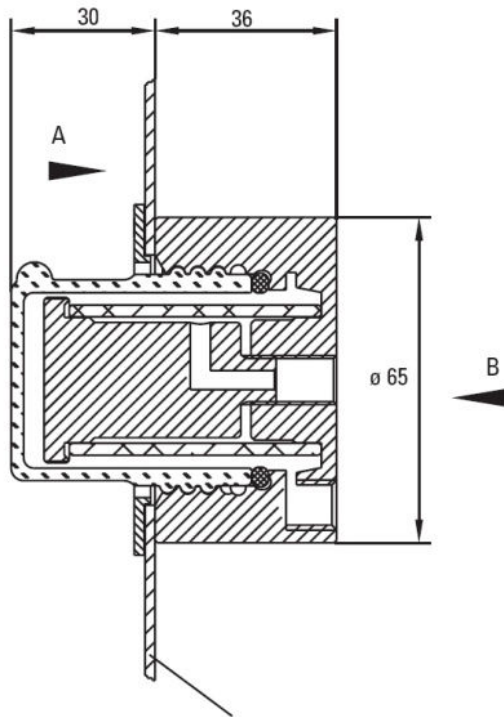

bore-hole in frontpanel $\varnothing 50$

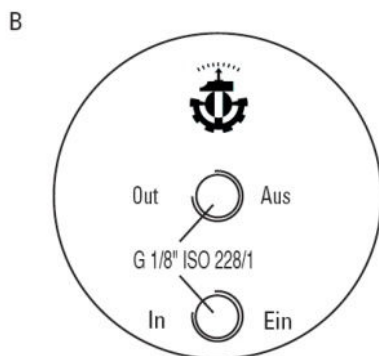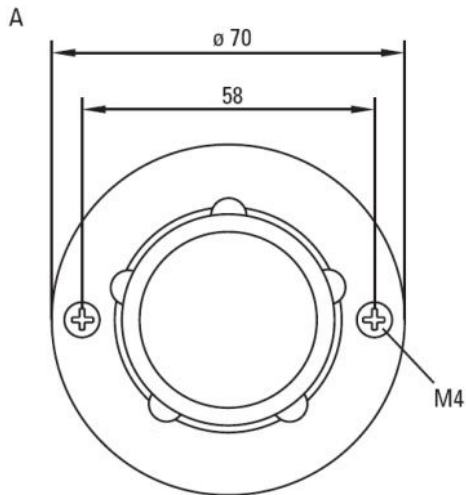



ANKERSMID Liquid stop ALS

Application

The ALS liquid-stop protects analyzers against an inrush of liquids from the gas conditioning unit into the analyzer.

This avoids major damages of the analyser.

The best position of the liquid is behind the gas conditioning unit, and before the flow meter going to the analyser.

Description

The hydrophobic protective membrane of the liquid-stop ALS is placed between the two parts of the housing which are screwed together. It is lined with a porous glass filter frit in order to secure stable proportions.


The pore sizes of the protective membrane are designed in such a way that gas molecules and steam can pass through but liquid molecules are retained.

Owing to the horizontal flow direction of the gas and because possible liquids are draining off on the protective membrane due to gravity, the breakthrough of liquids to the analyzer is avoided. Changing the membrane is easy. The fixed positioning of the sealing O-rings guarantees always a secure sealing of both housing parts.

A special bracket is available to place these filters on the Ankersmid Modular System.

The filter can be rotated about 180° in the holder for wall-mounting or Ankersmid Modular System.

This allows a flexible adaptation of in- and outlet to local conditions.

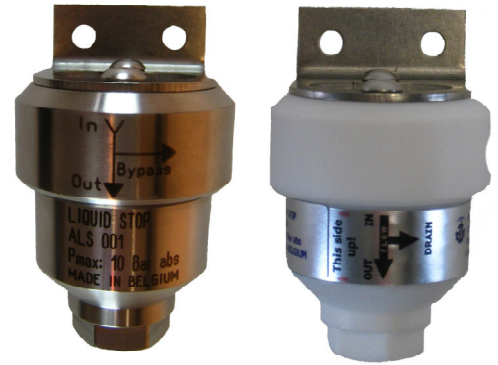

* Pictures may vary

- **Secure protection against liquid break-through**
- **Also suitable for high pressures**
- **Available in stainless steel and PVDF**
- **Fast exchange of the hydrophobic membrane**
- **Wall-mounting holder included**




ANKERSMID Liquid stop
ALS

Technical data

Model ALS	ALS 001	ALS 002
Gas flow rate	200NI/h max.	
Gas pressure	0,3 -10bar abs.	0,3-2bar abs.
	ΔP max. 0,5bar	
Material	SS 316, FPM, PTFE, Polyester	PVDF, FPM, PTFE, Polyester
Sample gas temperature	+100°C max.	+80°C max.
Ambient temperature	0°C to +60°C	
Dead volume	4ml	
Differential pressure with medium air at 20°C	50mbar at 100NI/h 100mbar at 200NI/h	
Connections	NPT 1/8"i	
Mounting/weight	Wall-mounting/approx. 0,3kg	

ANKERSMID Liquid stop
ALS

Dimensions

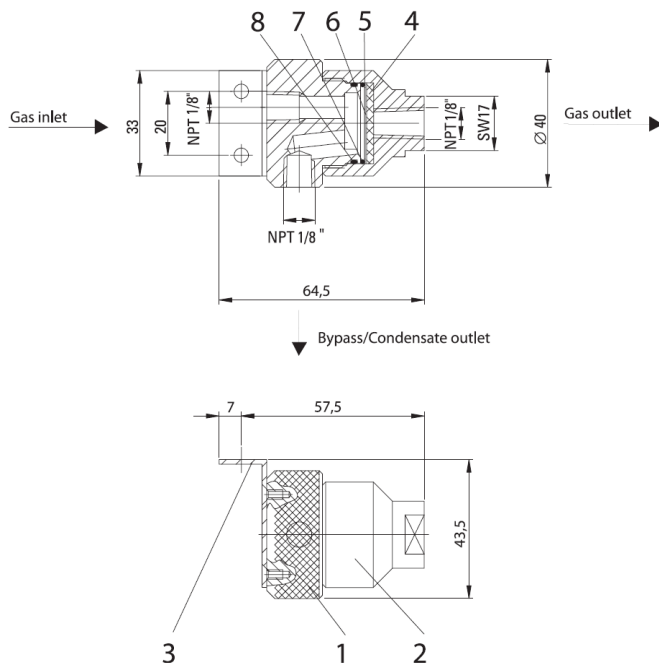

- 1 Upper part of housing
- 2 Lower part of housing
- 3 Holding angle
- 4 Filter frit (glass)
- 5 Hydrophobic protective membrane
- 6 Flat ring (PTFE)
- 7 O-ring (FPM)
- 8 O-ring (FPM)

ANKERSMID Flow meter

AFM 10x/20x Series

Application

The AFM flow meter for front and panel mounting are used for flow control of gas media in analysis devices and systems.

Description

The Ankersmid AFM 10x flow meter consists of a vertical, internally conical glass tube widening towards the top in which a float can move freely upwards and downwards and of the head and bottom piece with an integrated Stainless Steel needle valve. The sample gas flows upwards through the tube and lifts the float until a radial clearance occurs between the tube wall and the float so that forces affecting the body are in equilibrium. Every position of the float corresponds to a certain flow which can be read on a calibrated scale.

The measuring tube is sealed within the head and bottom part with FPM o-rings, as is the fine adjustment needle valve.


The flow meter is fitted with a fine adjustment valve in the inlet for precise flow value setting.

The Ankersmid AFM 20x flow meter consists of a vertical, internally conical glass tube widening towards the top in which a float can move freely upwards and downwards. A "front panel" of a maximum 4 mm thickness with two appropriate mounting bore holes serves as base body for attaching the head and the bottom part.

The measuring tube is sealed within the head and bottom part with FPM o-rings. All parts coming into contact with the gas medium are made of PVDF, FPM and glass.

Available flow ranges:

AFM 101	0,1-1,2 l/min
AFM 102	0,5-2,5 l/min
AFM 103	0,5-6 l/min
AFM 104	2-14 l/min
AFM 105	5-30 l/min
AFM 201	0,2-2 l/min
AFM 202	0,2-2 l/min

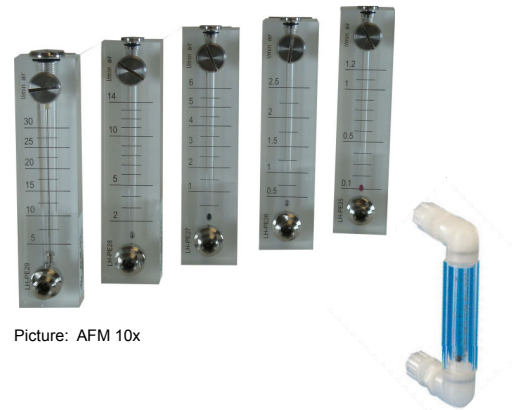

Picture: AFM 10x

Picture: AFM 20x

- **Good chemical resistance**
- **Compact design**
- **AFM 10x with fine adjustment needle valve**

ANKERSMID Flow meter

AFM 10x/20x Series


Technical data

Model	AFM 101	AFM 201/202
Max. pressure	20 bar abs. (30 bar/30°C)	3 bar abs.
Max. temperature	75°C	60°C
Material flow tube	Acrylic (PMMA)	Duran® glass
Material valve	SS 316	---
Material sealing, float	Viton®, EPDM	FPM, glass
Material connectors	SS 316	PP, PVDF
Connections	NPT 1/4"	DN 4/6mm
Accuracy	± 10% F.S. (H ₂ O, +20°C)	
Weight	300g	100g


ANKERSMID Flow meter

AFM 10x/20x Series

Dimensions

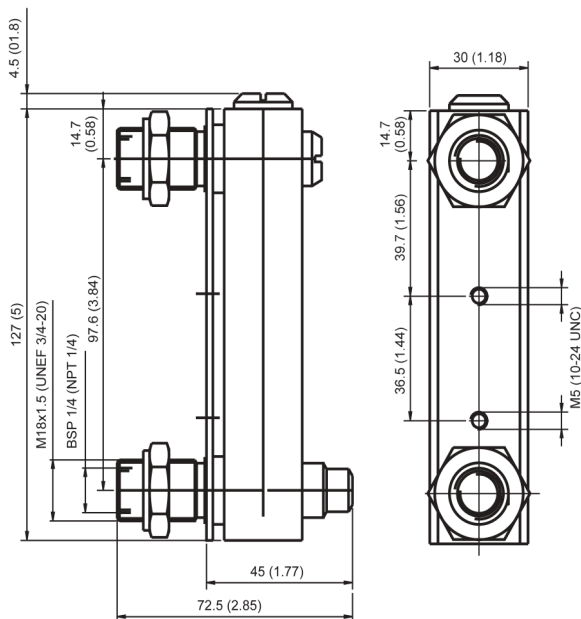

Picture: AFM 101

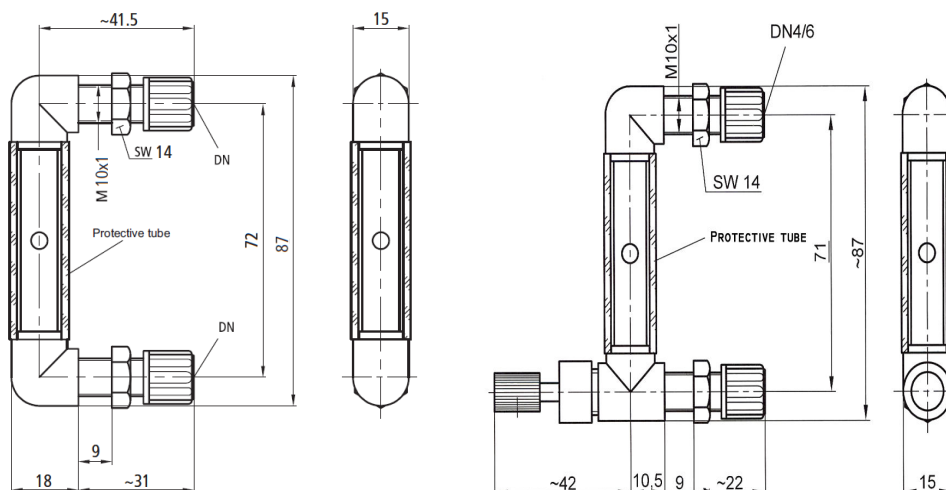

Picture: AFM 201

AFM 202

Ankersmid Peristaltic pump

ACP 001/010 series

Application

The **Ankersmid ASR25** peristaltic pump is designed for continuous condensate removal in most gas coolers and condensate vessels, and is suitable for a wide range of analytical applications.

The design ensures that condensate flow-back into the cooler is impossible.

The pumps 0,25l/h capacity guarantees complete condensate removal, even at high dew points.

Description

The **ASR25** is a self-suction pump designed for continuous operation.

Driven by a synchronous motor a system of pulleys pushes the condensate through a special tube with a very long runtime.

These pulleys are pressed by 4 springs on the peristaltic tube.

A running speed of 5 rpm guarantees that the two PVDF hose pulleys and the Novoprene[®] hose provide good mechanical and chemical resistance with a long life time.

Changing the peristaltic tube is an easy procedure that only takes seconds.


- The pump can be installed inside the Ankersmid Compressor Cooler (ACC) and Ankersmid Peltier Cooler (APC).

- Also available in an ABS housing (See ACP 010)

- The pump can be clicked on the Ankersmid Modular System with a special bracket, eliminating the need for drilling and screwing, and facilitating an easy adjustment in the gas conditioning set-up.



* Pictures may vary



- **Capacity: 0,25l/h**
- **Pressure range: 200mbar up to 2,2bar abs.**
- **Connection: tube DN4/6**
- **Material: Novoprene[®], PVDF**
- **Power: 230/115V, 50/60Hz**



Ankersmid Peristaltic pump
ACP 001/010 series

Technical data

Model ACP	ACP 001	ACP 010
Housing	No	Yes, material: ABS
Capacity	0,25l/h standard	
Pump speed	5 rpm standard	
Pressure range	200mbar up to 2,2bar abs.	
Sample gas inlet/outlet	DN 4/6mm tube connections	
Sample temperature	0°C to +60°C	
Ambient temperature	0°C to +50°C	
Material of connectors	PVDF	
Material of tube	Novoprene®	
Storage temperature	-10°C to +60°C	
Power consumption	3,5W	
Protection class	IP10	IP 52
Operation mode	100% continuous duty	
Dimensions (w x h x d)	80 x 105 x 95 mm	80 x 150 x 135 mm
Weight	0,39Kg	0,6Kg
Power supply	230V/50Hz 115V/60Hz	230V/50Hz 115V/60Hz



PVDF = Polyvinylidene difluoride



Ankersmid Peristaltic pump

ACP 001/010 series

Dimensions

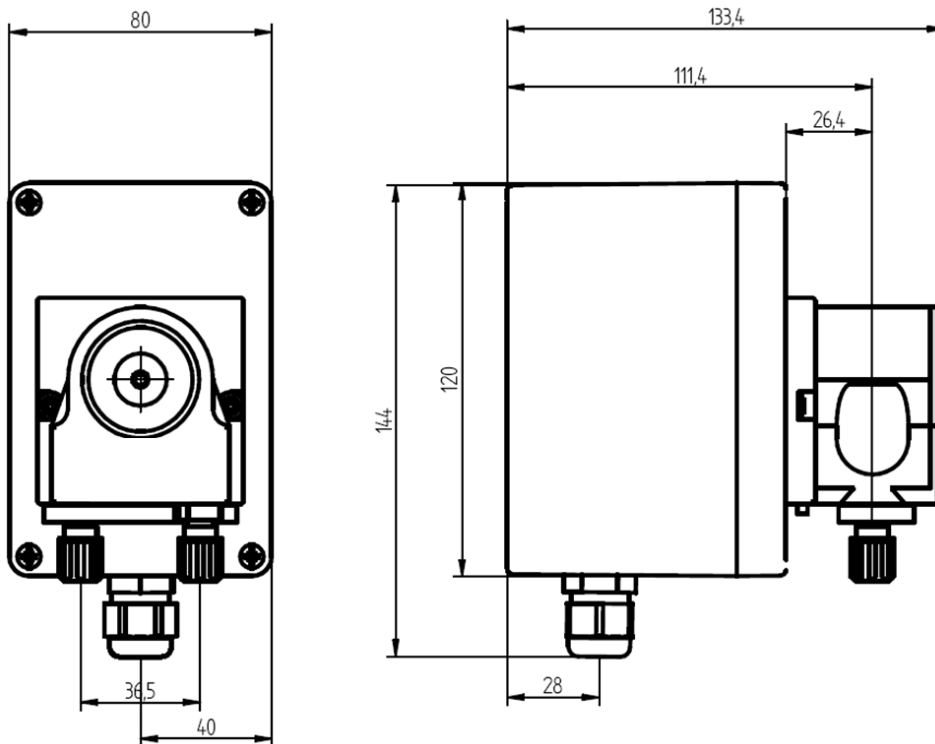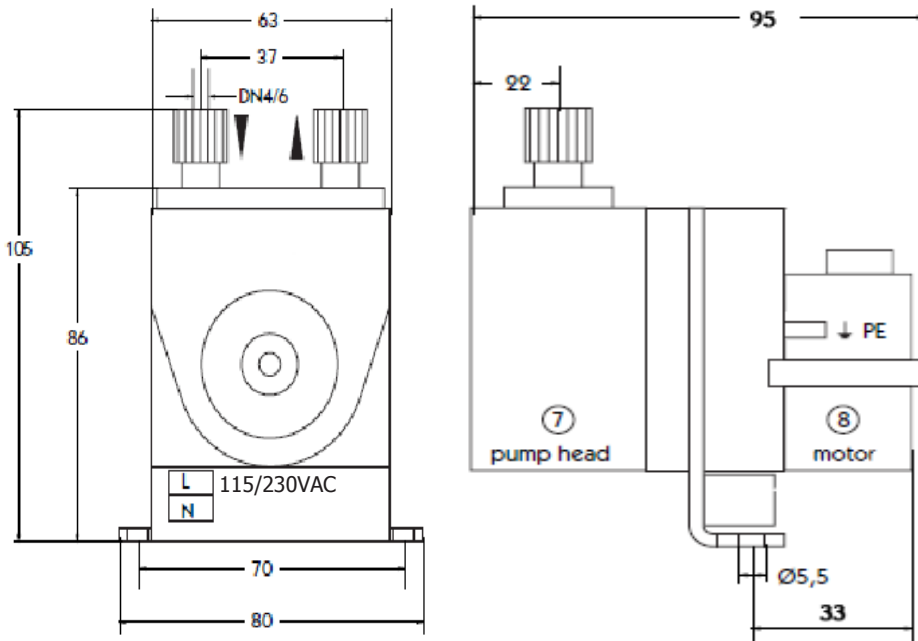



ANKERSMID Diaphragm pump

AMP 510/518/530 Series

AMP xxx TP temperature resistant PTFE

AMP xxx T temperature resistant

AMP xxx TC with thermostatic temperature control

AMP xxx EC with electronic temperature control

Flow rates 10 -18 or 30 L/min

Application

Ankersmid Diaphragm Pumps are used for the transportation of sample gas in sample conditioning systems in the chemical industry, for environmental applications, and in production technology; some application examples are sampling gases from the ambient environment, exhaust gases and smoke analysis. The **AMP 510/518/530** is easy to install and can be adapted to a variety of process conditions.

Description

When analyzing hot gases, care must be taken not to cool the gas en route from sampling point to the gas analyzer. Were the gas to cool down, it could condensate and gas constituent parts could condense out of the gas, leading to inaccurate measurement results. To overcome condensation issues, hot gases are pumped using diaphragm pumps with heated heads.

All Ankersmid AMP 5xx models are characterized by an even spread of temperature throughout the pump head and highly efficient insulation. All models are characterised by an even spread of temperature throughout the pump head and highly efficient insulation. Pumps for this new range are available in three different versions:

- A temperature resistant version (**T**) up to 240°C
- A heated version (**TC**) up to 240°C with thermostatic temperature control
- A heated version (**EC**) for temperatures up to 240°C with electronic temperature control with PC software

Principle

The basic construction of the AMP diaphragm gas sampling pumps is simple. An elastic diaphragm is moved up and down by an eccentric (see illustration). On the down-stroke it draws the air or gas being handled through the inlet valve. On the up-stroke the diaphragm forces the medium through the exhaust valve and out of the head. The compression chamber is hermetically separated from the drive mechanism by the diaphragm. The pumps transfer, evacuate and compress completely oil-free.



- **No contamination of the media due to oil-free operation**
- **Low maintenance**
- **Cool running motor even when in constant use**
- **Can operate in any installed position**
- **No condensation in the pump head**
- **Low heat loss to surroundings**
- **Easy access to the pump head**
- **Energy efficient heating**
- **Electronically controlled heating system**
- **PC software for controlling the pump via a PC and documentation of all operational data**
- **Gas tight:
Leakage < 6 x 10⁻³ mbar l/s**





ANKERSMID Diaphragm pump
AMP 510/518/530 Series

Technical data



Model AMP	AMP 510				AMP 518				AMP 530		
Version	TP	T	TC	EC	TP	T	TC	EC	T	TC	EC
Capacity (l/min)	10				18				30		
Max. operating pressure (bar g)	1,5										
Sample gas inlet/outlet	G1/8" f										
Ultimate vacuum (mbar abs.)	240				200						
Materials											
Pump head	PTFE	SS316			PTFE	SS316			SS316		
Diaphragm	PTFE-coated										
Valves	PTFE										
Sample and ambient temperature	+5°C to 40°C										
Pump motor											
Power consumption (W)	80				100				170		
Operating current (A)	0,4				0,6				1		
Protection class	IP54										
Heating											
Power consumption (W)	-	140			-	250			-	400	
Operating current (A)	-	0,6			-	1,2			-	1,9	
Heating temperature (°C)	-	240			-	240			-	240	
Operation mode	100% continuous duty, start of the pump only without pressure										
Weight	4Kg				7,5Kg				12Kg		
Power supply	230V/50Hz 115V/60Hz										

PTFE = Polytetrafluoroethylene (Teflon®)
 PVDF = Polyvinylidene difluoride
 FFPM = Perfluorinated Elastomer (Kalrez®)





ANKERSMID Diaphragm pump


AMP 510T/TP

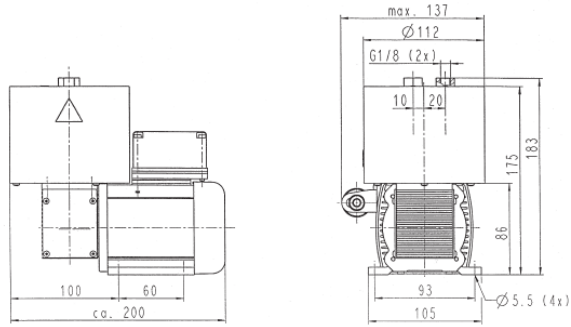



AMP 510EC



Dimensions




AMP 510TC

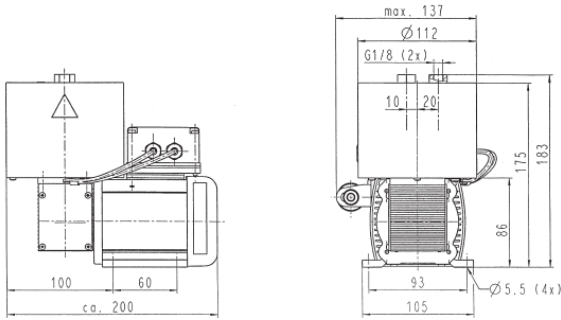

All dimensions in mm


Performance characteristics

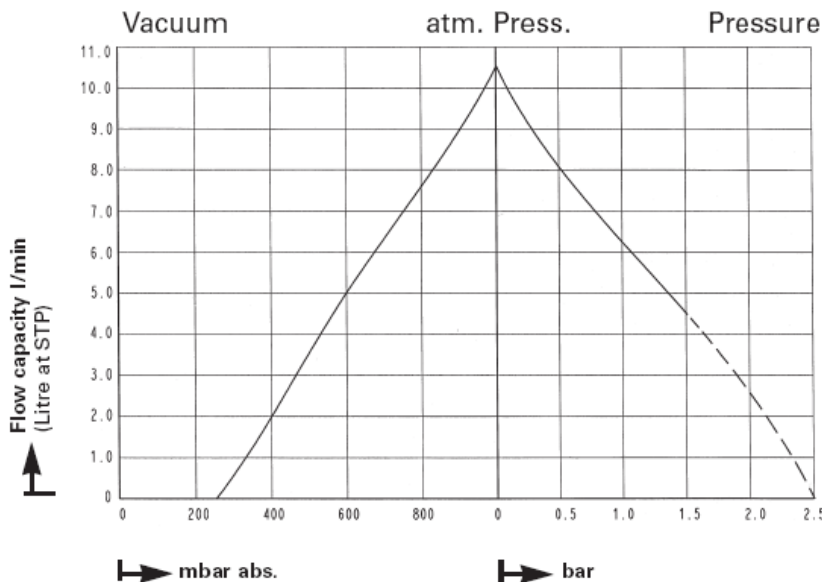


————— continuous duty cycle
 - - - - - for short periods only




ANKERSMID Diaphragm pump AMP 518T/TP

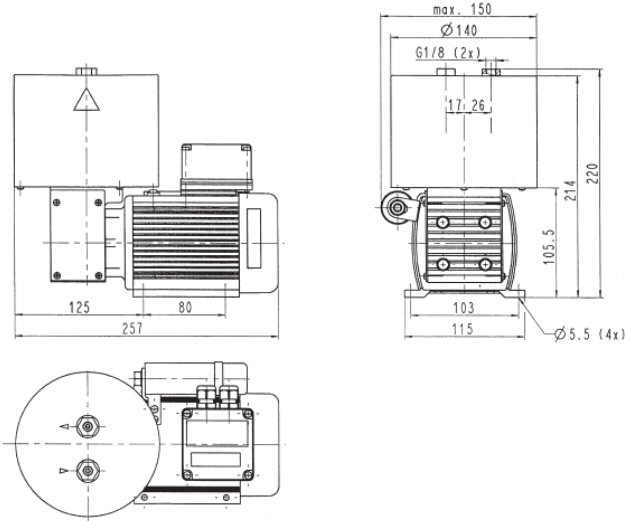

Dimensions AMP 518EC

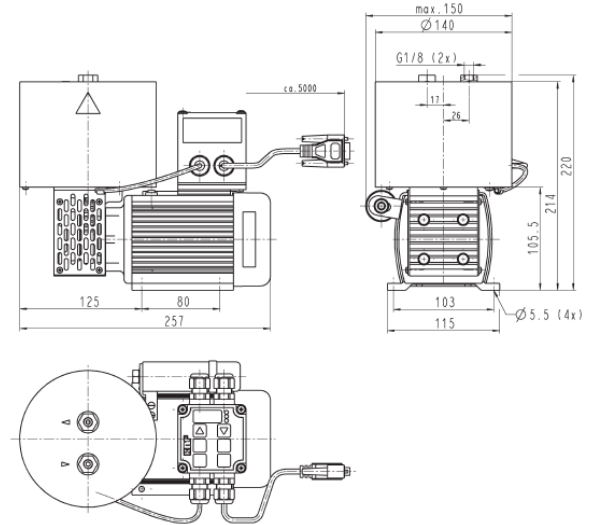


AMP 518TC

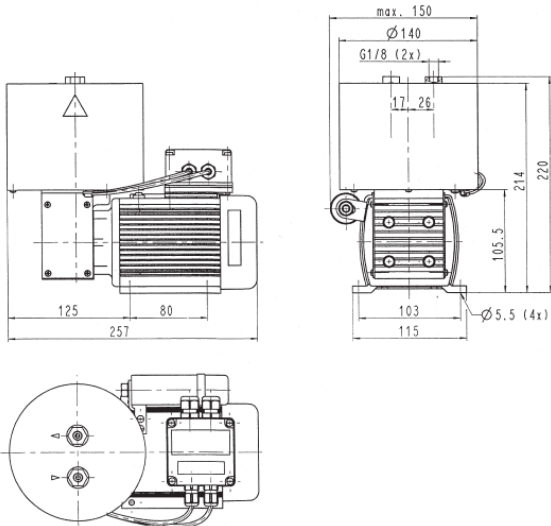



All dimensions in mm

Performance characteristics


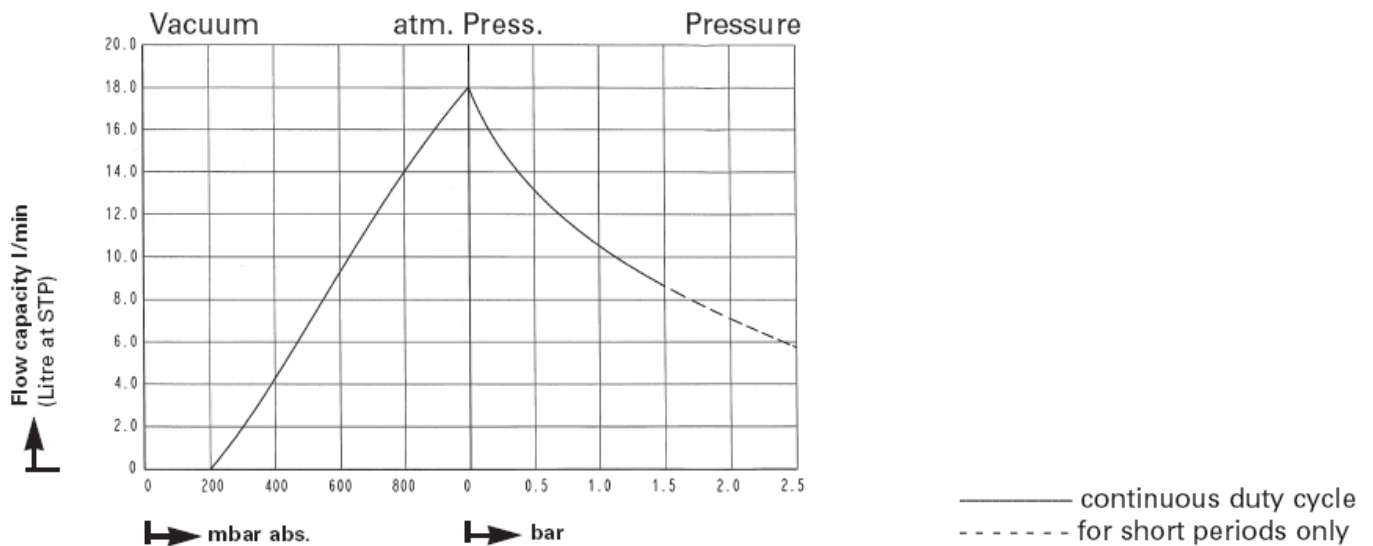






ANKERSMID Diaphragm pump AMP 530T

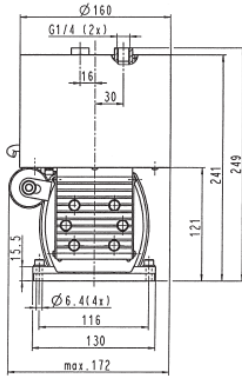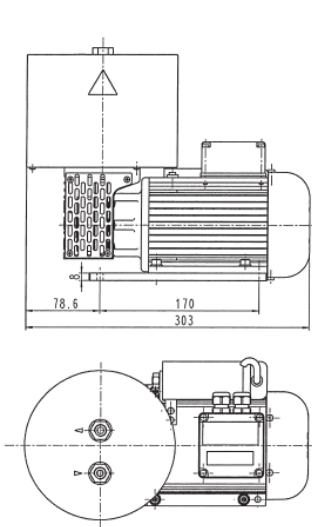

AMP 530EC

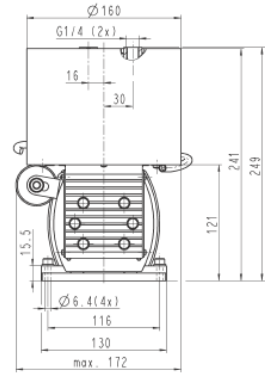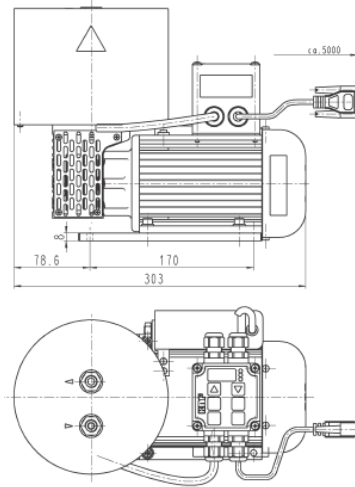


AMP 530TC

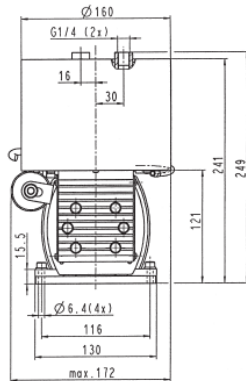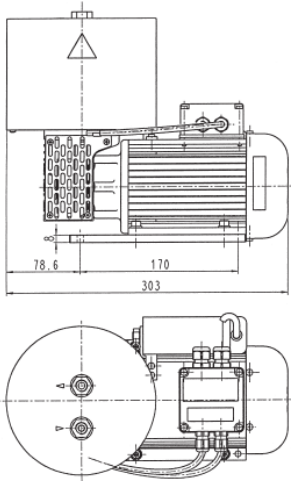

All dimensions in mm

Performance characteristics

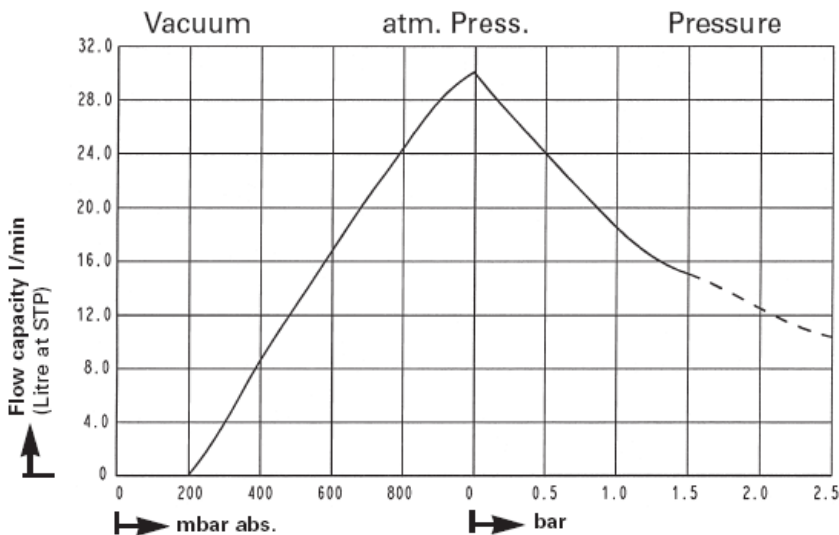

—— continuous duty cycle
----- for short periods only

ANKERSMID Diaphragm pump

AMP 416/416Ex Series

Application

Ankersmid Mini Diaphragm Pumps are used for the transportation of sample gas in sample conditioning systems in the chemical industry, for environmental applications, and in production technology; some application examples are sampling gases from the ambient environment, exhaust gases and smoke analysis. The **AMP 416/416Ex** is easy to install and can be adapted to a variety of process conditions.


Description

The new range of **AMP 416/416Ex** pumps are equipped with the patented stress-optimized structured diaphragm, resulting in a durable product of high pneumatic performance and compact size. Special valves ensure minimum resistance to flow.


The pumps can be operated by either standard 230VAC, or for ex-proof applications, with a motor with various options on voltages and frequencies.

Principle

The basic construction of the AMP diaphragm gas sampling pumps is simple. An elastic diaphragm is moved up and down by an eccentric (see illustration). On the down-stroke it draws the air or gas being handled through the inlet valve. On the up-stroke the diaphragm forces the medium through the exhaust valve and out of the head. The compression chamber is hermetically separated from the drive mechanism by the diaphragm. The pumps transfer, evacuate and compress completely oil-free.

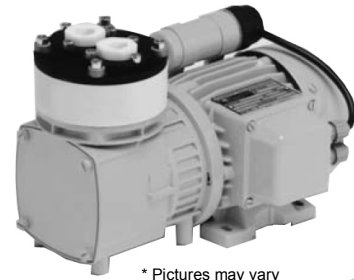

* Pictures may vary

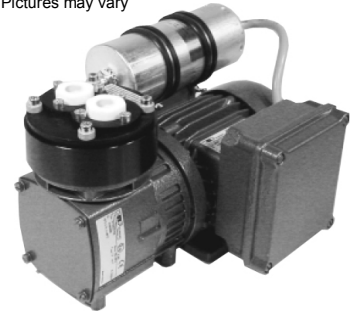

- **No contamination of the media due to oil-free operation**
- **Low maintenance**
- **Very quiet and little vibration**
- **Chemically-resistant models transferring high aggressive and corrosive gases and vapours**
- **High level of gas tightness: approx. 6×10^{-3} mbar x l/s**
- **Cool running motor even when in constant use**
- **Temperature resistant version up to 200°C**
- **Can operate in any installed position**
- **Explosion-proof version according to ATEX for Zone 1**



ANKERSMID Diaphragm pump AMP 416/416Ex Series

Technical data



Model AMP	AMP 416	AMP 416Ex
Capacity	16 l/min without pressure	13 l/min without pressure
Max. operating pressure (bar g)	1,5 bar abs.	
Sample gas inlet/outlet	G1/4" f	
Ultimate vacuum (mbar abs.)	53	
Materials		
Pump head	PTFE	
Diaphragm	PTFE-coated	
Valves	PTFE	
Sample and ambient temperature	+5°C to 40°C	
Power consumption	130W	70W
Protection class	IP44	⊕ Pump parts: EEx IIB-T4 ⊕ Motor: EExe II-T3, IP44
Operating current	1,0A	0,96A
Operation mode	100% continuous duty, start of the pump only without pressure	
Weight	5,5Kg	7,5Kg
Power supply	230V/50Hz 115V/60Hz	230V/50Hz 115V/60Hz

PTFE = Polytetrafluoroethylene (Teflon®)

ANKERSMID Diaphragm pump AMP 416

AMP 416Ex


Performance

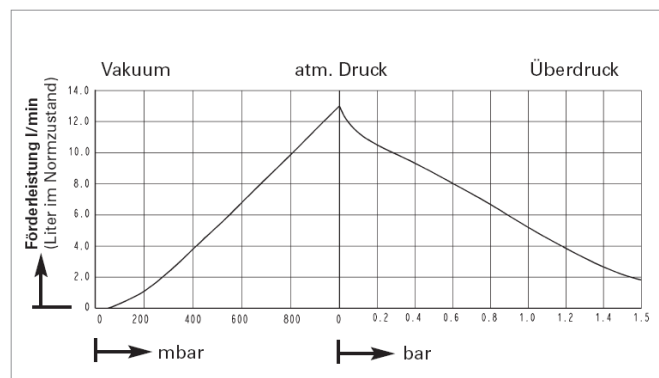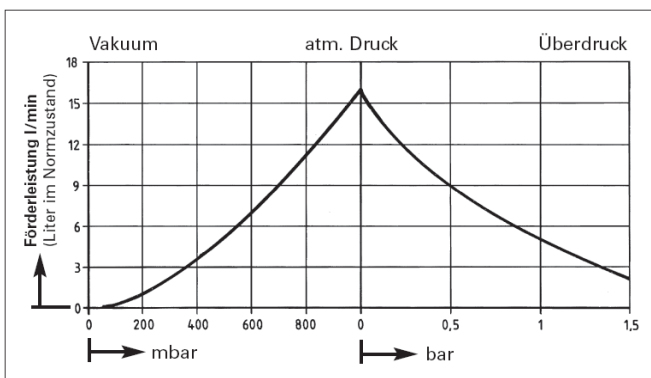




ANKERSMID Diaphragm pump
AMP 416

Dimensions

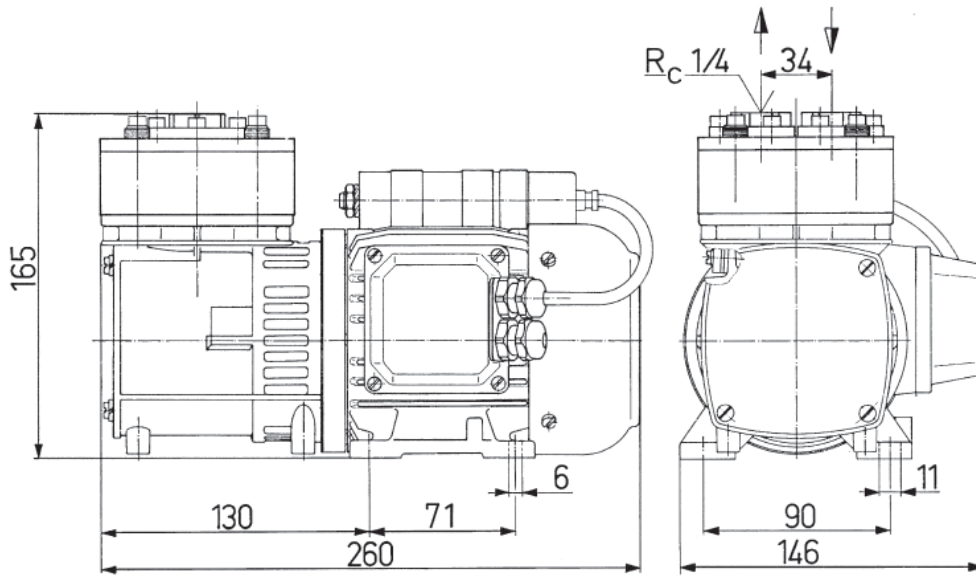

AMP 416Ex

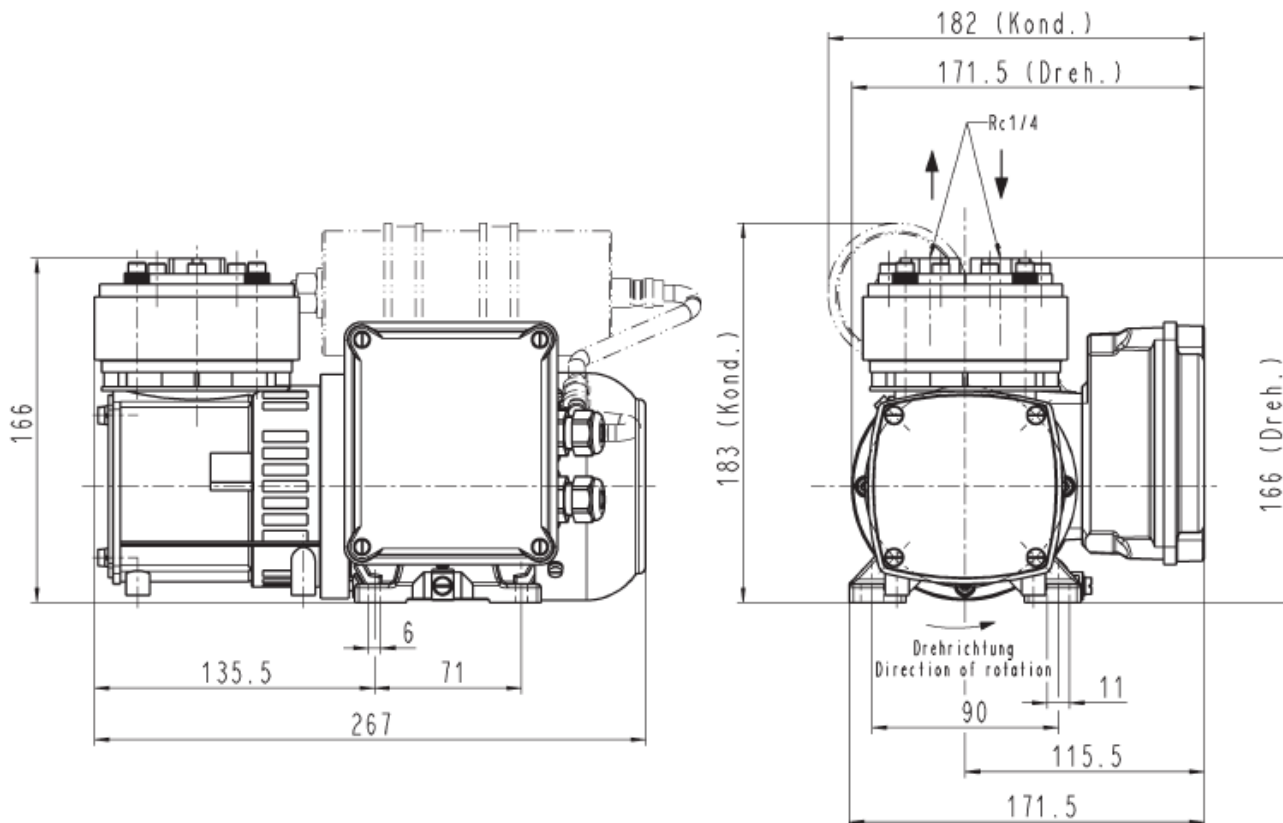

All dimensions in mm

ANKERSMID Diaphragm pump

AMP 057 Series

Application

Ankersmid Mini Diaphragm Pumps are used for the transportation of sample gas in sample conditioning systems in the chemical industry, for environmental applications, and in production technology; some application examples are sampling gases from the ambient environment, exhaust gases and smoke analysis. The **AMP 057** is easy to install and can be adapted to a variety of process conditions.

Description

The new range of **AMP 057 / AMP 057Ex** pumps are equipped with the patented stress-optimized structured diaphragm, resulting in a durable product of high pneumatic performance and compact size. Special valves ensure minimum resistance to flow.

The pumps can be operated by either standard 230VAC, or for ex-proof applications, with a motor with various options on voltages and frequencies.

Principle

The basic construction of the AMP diaphragm gas sampling pumps is simple. An elastic diaphragm is moved up and down by an eccentric (see illustration). On the down-stroke it draws the air or gas being handled through the inlet valve. On the up-stroke the diaphragm forces the medium through the exhaust valve and out of the head. The compression chamber is hermetically separated from the drive mechanism by the diaphragm. The pumps transfer, evacuate and compress completely oil-free.



- **No contamination of the media due to oil-free operation**
- **Low maintenance**
- **High performance because of structured diaphragm**
- **High level of gas tightness**
- **Long product life thanks to structured diaphragm**
- **Very quiet and little vibration**
- **Copes well with vapour and condensation**
- **Cool running motor even when in constant use**
- **Can operate in any installed position**
- **Explosion proof version according to ATEX for Zone 1**




ANKERSMID Diaphragm pump AMP 057 Series

Technical data

Model AMP	AMP 057	AMP 057Ex
Capacity	7,0 l/min without pressure 0,9 / 2,0 bar abs. on suction / pressure side: 5 l/min	
Max. operating pressure (bar g)	0,2 to 2,5 bar abs.	
Sample gas inlet/outlet	G1/8" f	
Ultimate vacuum (mbar abs.)	140	
Materials		
Pump head	PVDF	
Diaphragm	PTFE-coated	
Valves	FFPM/Kalrez®	
Sample and ambient temperature	+5°C to 40°C	
Power consumption	70W	65W (115V/60Hz: 60W)
Protection class	IP54	Ⓔ II2G EEx de, q IIB T4 IP 54 EN 60529
Operating current	0,45A (115VAC: 0,7A)	0,3A (115VAC: 0,45A)
Operation mode	100% continuous duty, start of the pump only without pressure	
Weight	3,1Kg	3,3Kg
Power supply	230V/50Hz 115V/60Hz	230V/50Hz 115V/60Hz

PTFE = Polytetrafluoroethylene (Teflon®)
 PVDF = Polyvinylidene difluoride
 FFPM = Perfluorinated Elastomer (Kalrez®)

Performance characteristics



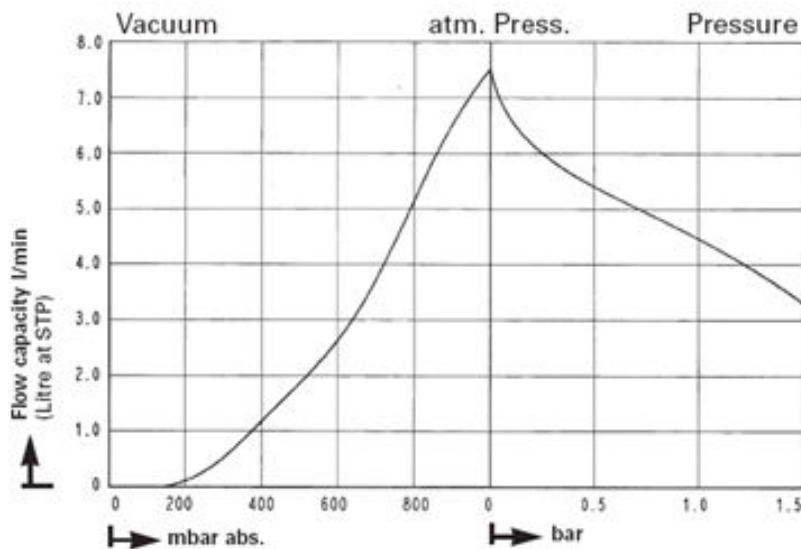







ANKERSMID Diaphragm pump

Dimensions

AMP 057

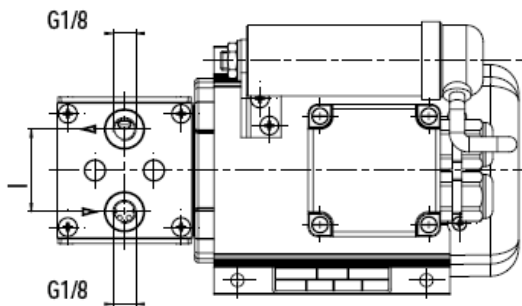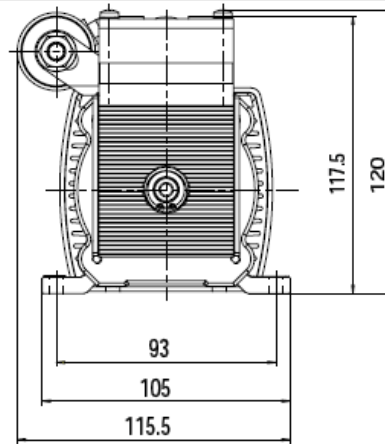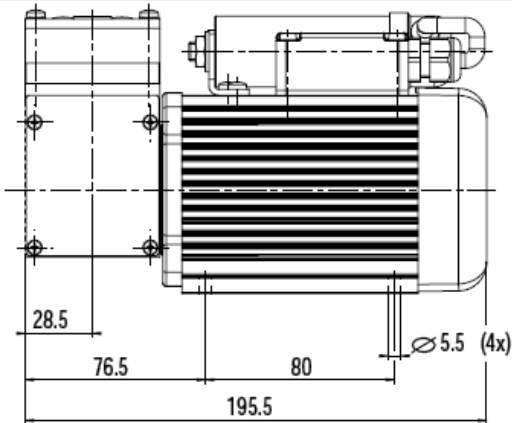

AMP 057Ex

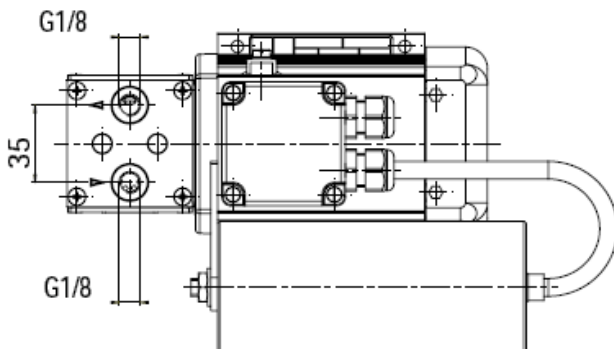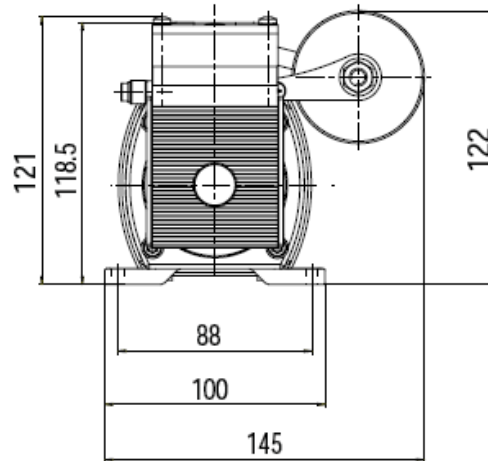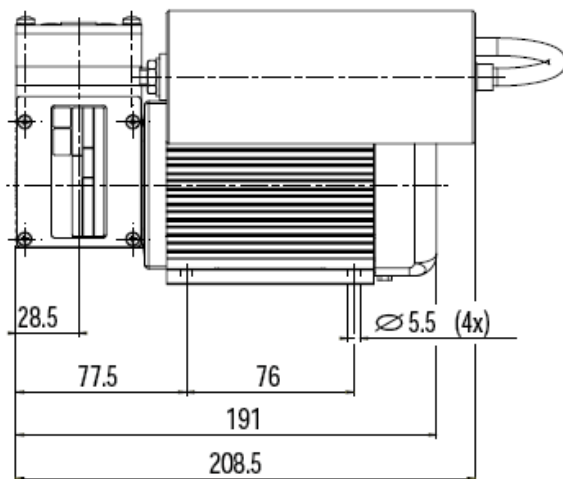

All dimensions in mm



ANKERSMID Diaphragm pump AMP 26 Series

Application

Despite its small size the mini diaphragm vacuum pump offers a high level of performance. It is used especially in the fields of analysis, medicine and production technology.

The pumps are used for application such as sucking gases, taking samples (even liquids in a vacuum) and evacuating vessels.

The AC models are suited for use in machinery which is permanent or mains-operated.



* Picture may vary

Description

The pumps are equipped with the patented stress-optimized structured diaphragm, resulting in a high pneumatic performance, a durable product and compact size.

Special valves ensure that the product copes well with vapor and condensation that could be present in the gas stream.

Principle

The basic construction of the AMP diaphragm gas sampling pumps is simple. An elastic diaphragm is moved up and down by an eccentric (see illustration). On the down-stroke it draws the air or gas being handled through the inlet valve. On the up-stroke the diaphragm forces the medium through the exhaust valve and out of the head. The compression chamber is hermetically separated from the drive mechanism by the diaphragm. The pumps transfer, evacuate and compress completely oil-free.



- **No contamination of the media due to oil-free operation**
- **Low maintenance**
- **High performance because of structured diaphragm**
- **High level of gas tightness**
- **Long product life thanks to structured diaphragm**
- **Very quiet and little vibration**
- **Copes well with vapour and condensation**
- **Cool running motor even when in constant use**
- **Can operate in any installed position**



ANKERSMID Diaphragm pump
AMP 26 Series

Technical data

Model AMP	AMP 26 E	AMP 26 S	AMP 26 C/F
Housing version	Without housing	Without housing	With housing
Capacity at atm. Pressure (l/min)	5,5	3	5,5
Max. operating pressure (bar g)	2,5	2,5	2,5
Vacuum (mbar abs.)	160	160	160
Sample gas inlet/outlet	G1/8" f		
Materials			
Pump head	PPS/Ryton®		
Diaphragm	PTFE-coated		
Valves	FFPM/Kalrez®		
Sample and ambient temperature	+5°C to 40°C		
Electrical connection	Wire 4 x 0,5mm ²		Cold appliance plug with 2 fuses 230V - 1A/ 115V - 3,2A 2,5m of cable and power switch
Power (W)	60		
Protection class	IP00	IP00	IP20
Protector	Thermo switch, double (115V/230V)		
Operating current (A)	0,65		
Weight (Kg)	1,1	1,1	1,9
Power supply	230/115V, 50/60Hz	230/115V, 50/60Hz	230V, 50Hz (C) 115V, 60Hz (F)



PTFE = Polytetrafluoroethylene (Teflon®)
 PPS = Polyphenylene Sulfide (Rypton®)
 FFPM = Perfluorinated Elastomer (Kalrez®)





ANKERSMID Diaphragm pump

AMP 26 E/S Series

Dimensions

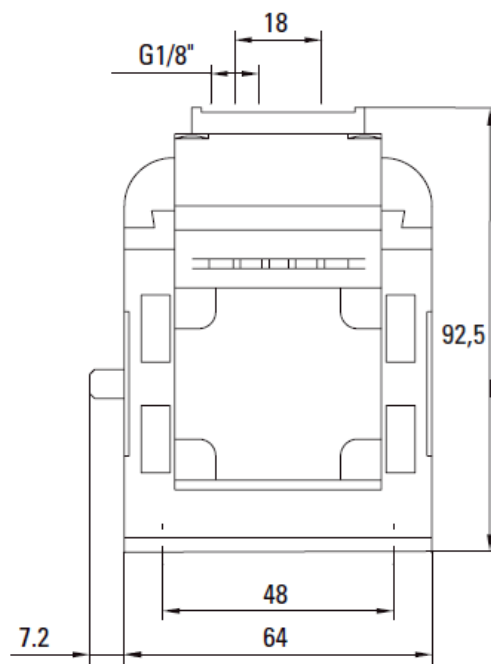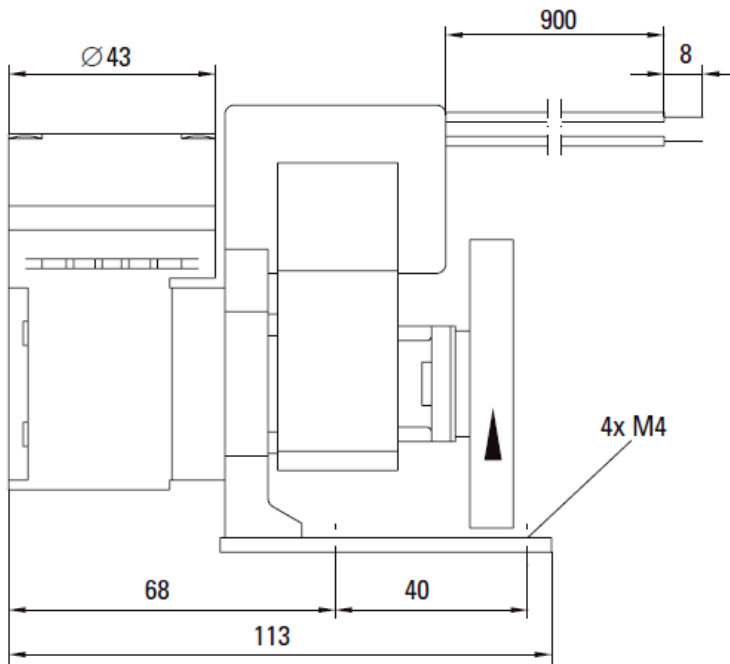

AMP 26 C/F Series

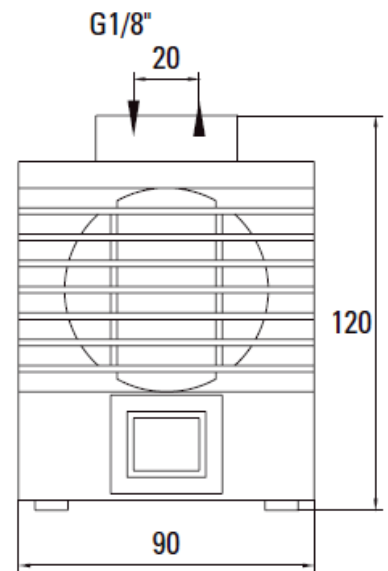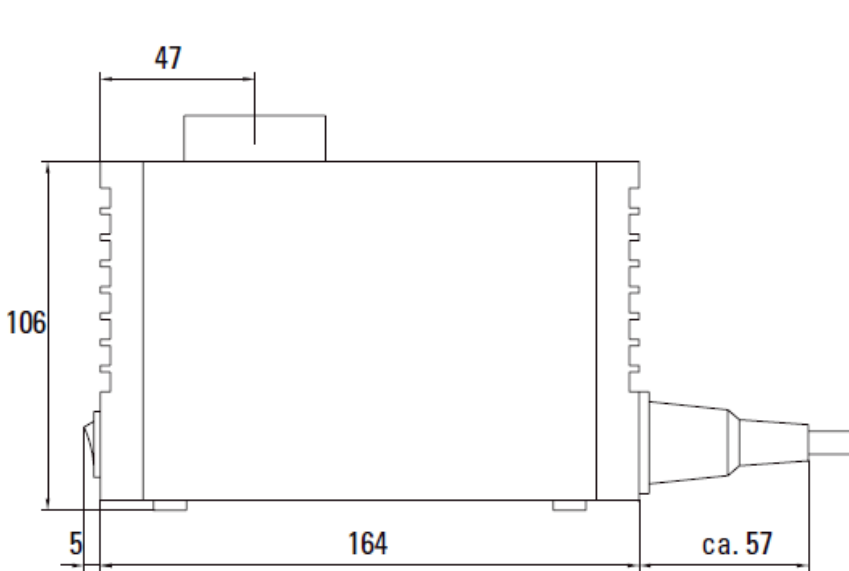

All dimensions in mm



ANKERSMID Diaphragm pump AMP 11E Series

Application

Despite its small size the mini diaphragm vacuum pump offers a high level of performance. It is used especially in the fields of analysis, medicine and production technology.

The pumps are used for application such as sucking gases, taking samples (even liquids in a vacuum) and evacuating vessels.

The AC models are suited for use in machinery which is permanent or mains-operated.



* Picture may vary

Description

The pumps are equipped with the patented stress-optimized structured diaphragm, resulting in a high pneumatic performance, a durable product and compact size.

Special valves ensure that the product copes well with vapor and condensation that could be present in the gas stream.

Principle

The basic construction of the AMP diaphragm gas sampling pumps is simple. An elastic diaphragm is moved up and down by an eccentric (see illustration). On the down-stroke it draws the air or gas being handled through the inlet valve. On the up-stroke the diaphragm forces the medium through the exhaust valve and out of the head. The compression chamber is hermetically separated from the drive mechanism by the diaphragm. The pumps transfer, evacuate and compress completely oil-free.



- **No contamination of the media due to oil-free operation**
- **Compact size due to structured diaphragm**
- **Maintenance-free**
- **High performance because of structured diaphragm**
- **High level of gas tightness**
- **Long product life thanks to structured diaphragm**
- **Copes well with vapour and condensation**
- **Cool running motor even when in constant use**
- **Can operate in any installed position**



ANKERSMID Diaphragm pump AMP 11E Series

Technical data


Model AMP	AMP 11E
Housing version	Without housing
Capacity at atm. Pressure (l/min)	11
Max. operating pressure (bar g)	0,5
Vacuum (mbar abs.)	170
Sample gas inlet/outlet	G1/8" f
Materials	
Pump head	PPS/Ryton®
Diaphragm	PTFE-coated
Valves	FFPM/Kalrez®
Sample and ambient temperature	+5°C to 40°C
Power (W)	60
Protection class	IP00
Protector	230VAC
Operating current (A)	0,6
Weight (Kg)	1,3
Power supply	230/115V, 50/60Hz

PTFE = Polytetrafluoroethylene (Teflon®)
PPS = Polyphenylene Sulfide (Ryton®)
FFPM = Perfluorinated Elastomer (Kalrez®)



ANKERSMID Diaphragm pump
AMP 11E Series


Dimensions

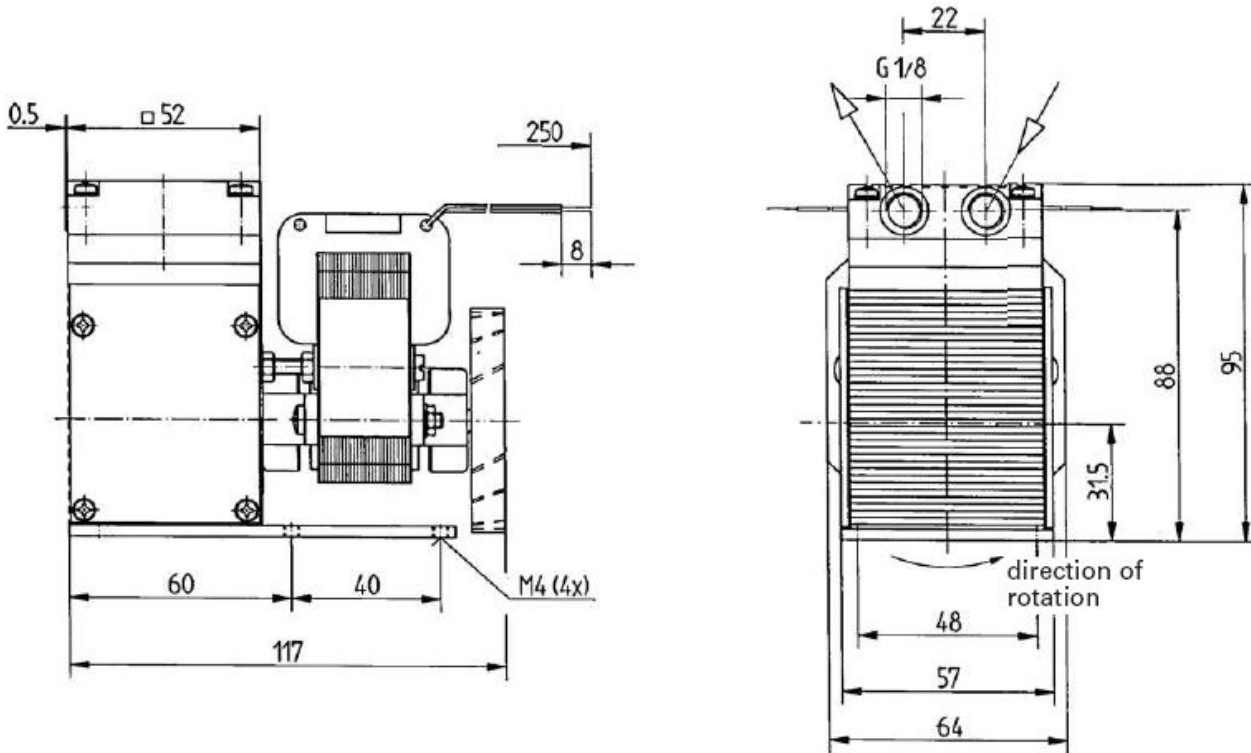

All dimensions in mm

ANKERSMID Diaphragm pump
AMP 11E Series

Performance

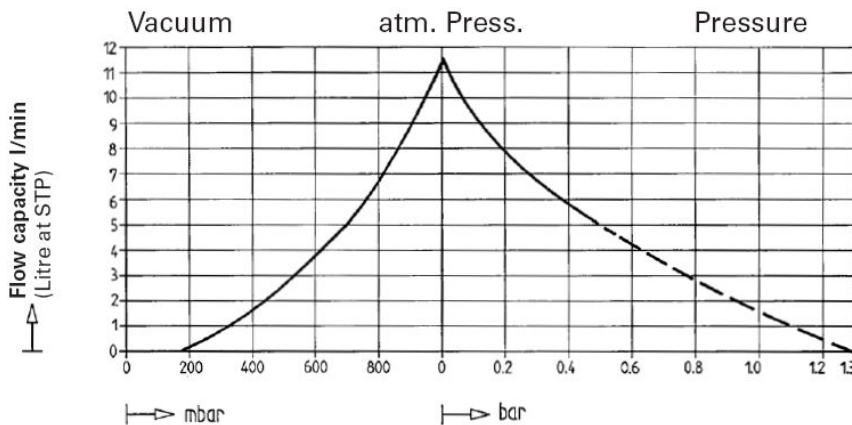

ANKERSMID NO₂ – NO Gas converter

AOX 1xx/2xx Series



Application

The NO₂/NO converters series AOX are to be coupled with a NO_x gas analyzer or NH₃ gas analyzer for flue exhaust. It is converted using a special catalyst which efficiently converts NO₂ in sample gas to NO.

Description

In the high temperature combustion processes, the nitrogen contained in the air reacts with the oxygen producing oxides of nitrogen in the forms of monoxide (NO) and dioxide (NO₂). The item NO_x shows the total amount of the two components.

For provisions laid down by law and regulatory instructions in terms of environmental protection or for process needs, the monitoring of the NO_x content in the air or in the waste gases flows is sometimes necessary.

The reference method of the NO_x content definition in a gas mixture is based on the phenomenon of chemiluminescence's that can be, however, only applied to the nitric oxide. The dioxide determination requires the preventive chemical reduction to NO.

By carrying out detections of nitric oxide in the gas mixture before and after putting it under the dioxide reduction procedure, it is possible to understand the incidence of each component involved. The NO₂/NO converter carries out the conversion of the nitrogen dioxide into monoxide through reaction inside the heating catalytic chamber.

It is inserted upstream the analysis instrument for NO_x along the flow line of the gas mixture examined.

The molybdenum catalyst and the temperature electronic regulation guarantee an efficiency of conversion at 98%, optimizing the performances and the duration of the cartridges of the catalytic material.

The item is composed of a stainless steel cylindrical chamber furnace heated by an electrical resistance that wraps it for all its length and is covered by a thick layer of thermal insulated material. Thanks to this, it is possible to get a stable temperature uniformly distributed and a low loss of heat.

Inside the furnace there is the molybdenum catalytic cartridge crossed by the flow of the gas mixture to be treated.

An electronic PID control thermo-regulator permits to set up and keep the temperature constant, detected through thermocouple with the most appropriate value.

On the thermo-regulator display the current temperature is visualized while luminous LED's give indications on the functionality status.

There is also a contact in the exchange as alarm status cumulative signalling for low and high temperature. The values of the intervention thresholds can be independently set up on the thermo-regulator. An electro-valve allows the catalyst chamber bypass.

The converter is available with (AOX 2xx) or without bypass valve (AOX 1xx). For test purposes, with the bypass valve the catalyst can be bypassed via a valve.

The catalyst cartridge is filled and formatted ex works factory and is ready for use immediately.

- **High flow rate at long operating time and high conversion efficiency (98% with new cartridge)**
- **No CO emission**
- **Operating temperature at 225°C**
- **Compact 19"-rack housing**
- **Catalyst cartridge easy to change without any tools**
- **Safe handling for easy maintenance**
- **Bypass solenoid valve**



ANKERSMID NO₂ – NO Gas converter
AOX 1xx/2xx Series


Technical data

Model	AOX 100	AOX 200
Part number	AOX 100	AOX 200
Housing version	19"-rack	
Housing color front panel	RAL 7035 (light-grey)	
Weight	Approx. 5 kg	
Gas inlet & outlet	Unheated	
Gas inlet temperature	Max. +250°C	
Operating temperature	+225°C for standard molybdenum composition filling (+600°C for optional metal filling)	
Max. temperature	+ 650°C	
Gas flow rate	Standard 60NI/h (max. 90NI/h)	
Operating pressure	Max. 1,5 bar abs.	
Sample gas inlet	1/4" NPT f	
Sample gas outlet	1/4" NPT f	
Conversion rate NO ₂ in NO	Effectiveness > 96% with a new catalyst	
Life time of the catalyst	Approx. 6 months, depending on gas conditions	
Relative air humidity	< 80%	
Ambient temperature	+5°C to 50°C	
Materials of gas wetted parts	Stainless Steel SS316, PTFE, FKM, Viton [®]	
Electrical data		
Mains connection	Mains power plug connector incl. 1 fine fuse 5x20m (T3A/H250V) , incl. 2,5m cable with plug. Alarm- and control signals via 9-pin Sub D-connector	
Alarm contact	Free programmable contact 1NO/1NC, rating: 250V, 5A AC	
Alarm set points	+/- 10°C of set-point (others on request)	
Protection class	IP20 EN 60529 / EN 61010 / EN 60519-1	
Power supply	230V/50Hz (Standard, others on request)	
Power consumption	Approx. 450W	



ANKERSMID NO₂ – NO Gas converter
AOX 1xx/2xx Series

Dimensions

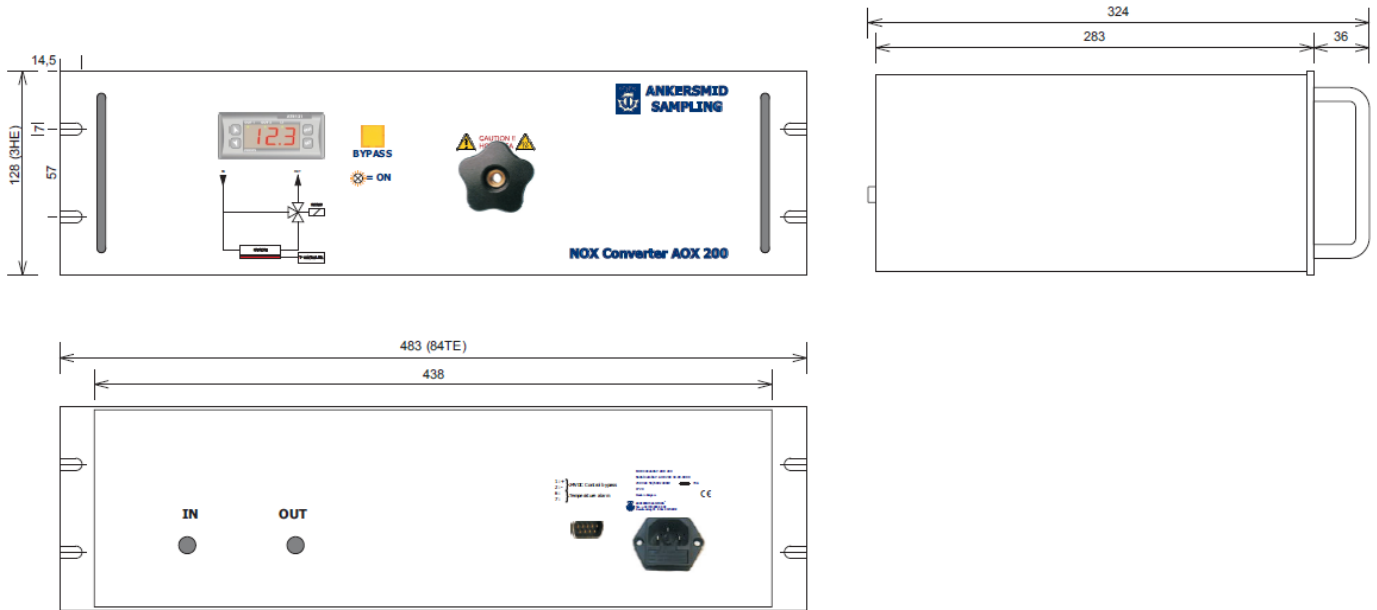



ANKERSMID Portable gas conditioning system

APS 3xx Series

Application

The portable gas conditioning system APS has been designed so that detailed gas analyses can be carried out at any time and in any place.

The entire gas conditioning system is housed in a compact and robust carrying case which ensures that the components can be removed easily and gas analyses carried out quickly, safely and with minimum maintenance.

Description

The portable system is suitable for variable, discontinuous and continuous operation. The components built into the system can be used for standard applications. For special requirements please ask us for other solutions.

The heated sample line is to be mounted at the gas measuring inlet terminal inside the portable case.

A ball-valve can be fitted to the inlet terminal of the portable system in order to calibrate analyser(s) with check gas.

The amount of flow is determined by a sample gas diaphragm pump.

The sample gas pump (AMP) is activated automatically by means of an excess temperature contact on the cooler.

Optional flow meters with integrated needle valve are available. The flow meters are built-in as the electronic controller and are visible from outside when the carrying case is closed.

This unique microprocessor controlled Peltier cooler is a powerful designed dew point stabiliser. The dew point is set at 4°C but can be changed at any value between 1°C and 15°C. The gas cooler is equipped with an innovative heat exchanger system.

A preliminary fine filter (AUF) is installed at the inlet of the gas sampling pump and can be equipped with a variety range of filter elements in different materials and porosities.

Any condensation is continually removed by the peristaltic pump type ASR25.

With the optional thermostatic paramagnetic O₂-sensor the APS is a suitable and reliable instrument for monitoring oxygen concentrations in various gas analytical control applications including process gas-, emission monitoring gas-, inert gas-, flue gas-, fermentation processes-, ambient air- and laboratory process control measurements.



* Picture may vary

- **Low maintenance and self-monitoring**
- **Dew point +4°C ± 0,1°C**
- **Ready for use < 15 min**
- **Compact design**
- **Optimum reliability**
- **Light weight**
- **Universally equipped**
- **Optional paramagnetic O₂-sensor**
- **Good chemical resistance**
- **Very visible colour for use in process environment**
- **Values readable from outside**



ANKERSMID Portable gas conditioning system Technical data
APS 3xx Series

APS Portable system	APS 303	APS 313
Gas flow rate max.	350 NI/h	200 NI/h
Sample outlet dew point	+1°C +15°C, factory setting: +4°C	
Dew point stability	±0,1°C	
Sample inlet temperature	Max. 190°C	
Sample inlet connection	Stainless steel connection DN4/6mm, suitable for heated sample lines	
Sample inlet dew point	Max. 50°C	
Ambient temperature	+5°C up to +45°C	
Maximum pressure	3 bar abs.	
Material of gas wetted parts*		
Heat exchanger coating	PFA®	
Diaphragm pump	AMP: Head: PPS, Valves: FFPM, Membrane: PTFE-coated	
Filter	head, element holder: PVDF, filter element: PTFE, body: Duran® glass	
Peristaltic pump	Tube: Novoprene®, Connectors: PVDF	
Others	Tubing: PTFE, Inlet connector: SS316, Outlet connector: PVDF	
Number of gas inlets	1	
Number of gas outlets	1 (standard), max. 2	
Filter porosity*	2µm	
Alarm contact	Free programmable contact 1NO / 1NC, rating: 250V, 16A AC	
Total cooling capacity	Max. 245kJ/h (2 Peltier elements)	
Storage temperature	-25 °C up to +65 °C	
Ready for operation	< 15 min	
Power supply	230V/50Hz or 115V/60Hz	
Power consumption	100VA	
Electrical connection	Cold appliance plug with 1,5 m of cable	
Housing	Portable heavy duty ABS case	
Housing dimensions	52,4cm x 42,8cm x 20,6cm (W x H x D)	
Electrical protection	Fuse 2A	
Electrical equipment standard	EN61010	
Weight approx.	12 kg	


Maximum values in technical data's must be rated in consideration of total cooling capacity at 25°C ambient temperature and 5°C outlet dew point

PTFE = Polytetrafluoroethylene (Teflon) PFA = Perfluoralkoxy-Polymere
 PVDF = Polyvinylidenfluoride FFPM = Perfluorelastomer (Kalrez)
 PPS = Polypropylenesulphide (Ryton)



ANKERSMID Portable gas conditioning system
APS 3xx Series

Dimensions

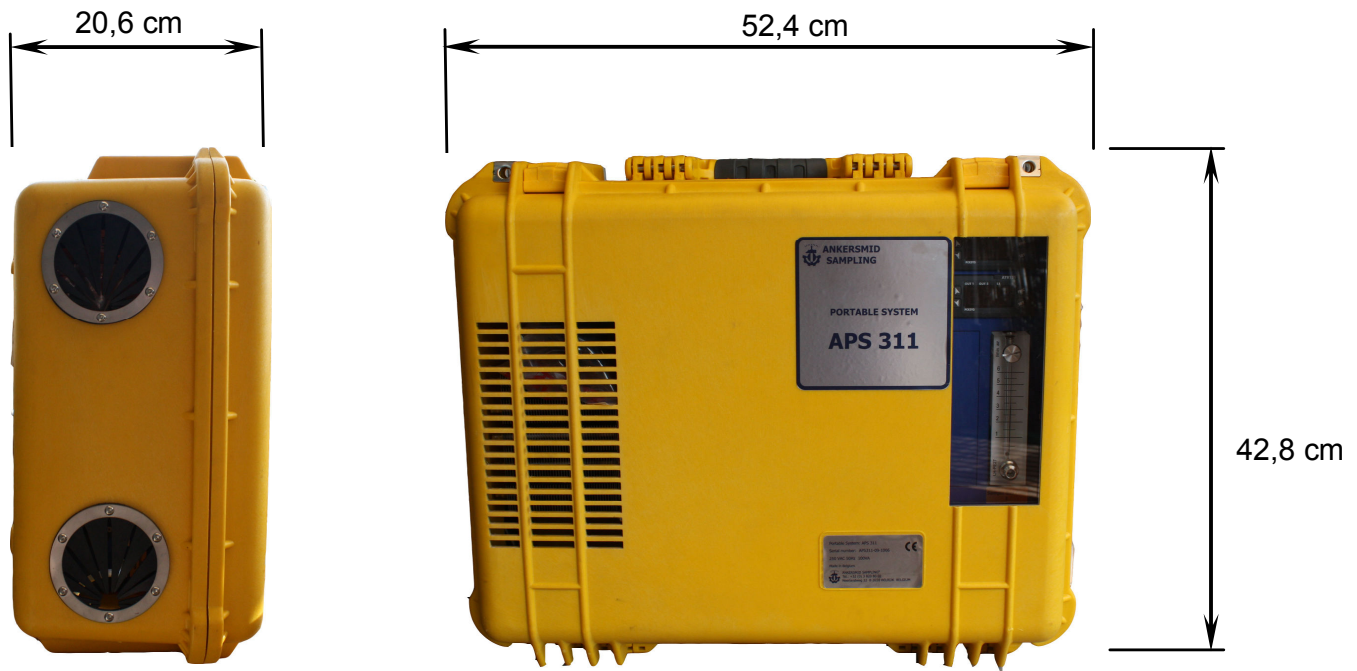

ANKERSMID Stationary gas conditioning system

ASS 3xx Series



* Picture may vary

Application

The stationary gas conditioning system ASS has been designed so that detailed gas analyses can be carried out continuously.

The entire gas conditioning system is mounted on a plate for an easy installation in cabinets, containers and any kind of walls.

The device guarantees a safe operation with minimum maintenance.

Description

The stationary system is suitable for variable, discontinuous and continuous operation. The components built into the system can be used for standard applications. For special requirements please ask us for other solutions.

The heated sample line is to be mounted directly at the sample gas inlet connector made of stainless steel.

A ball-valve can be fitted to the inlet terminal of the portable system in order to calibrate analyser(s) with check gas.

The amount of flow is determined by a sample gas diaphragm pump.

The sample gas pump (AMP) is activated automatically by means of an excess temperature contact on the cooler.

Optional flow meters with integrated needle valve are available. The flow meters are built-in as the electronic controller and are visible from outside when the carrying case is closed.

This unique microprocessor controlled Peltier cooler is a powerful designed dew point stabiliser. The dew point is set at 4°C but can be changed at any value between 1°C and 15°C. The gas cooler is equipped with an innovative heat exchanger system.

A preliminary fine filter (AUF) is installed at the inlet of the gas sampling pump and can be equipped with a variety range of filter elements in different materials and porosities.

Any condensation is continually removed by a peristaltic pump type ASR25.


With the optional thermostatic paramagnetic O₂-sensor the APS is a suitable and reliable instrument for monitoring oxygen concentrations in various gas analytical control applications including process gas-, emission monitoring gas-, inert gas-, flue gas-, fermentation processes-, ambient air- and laboratory process control measurements.

- **Low maintenance and self-monitoring**
- **Dew point +4°C ± 0,1°C**
- **Ready for use < 15 min**
- **Compact design**
- **Optimum reliability**
- **Universally equipped**
- **Optional paramagnetic O₂-sensor**
- **Excellent chemical resistance**



ANKERSMID Stationary gas conditioning system
ASS 3xx Series

Dimensions

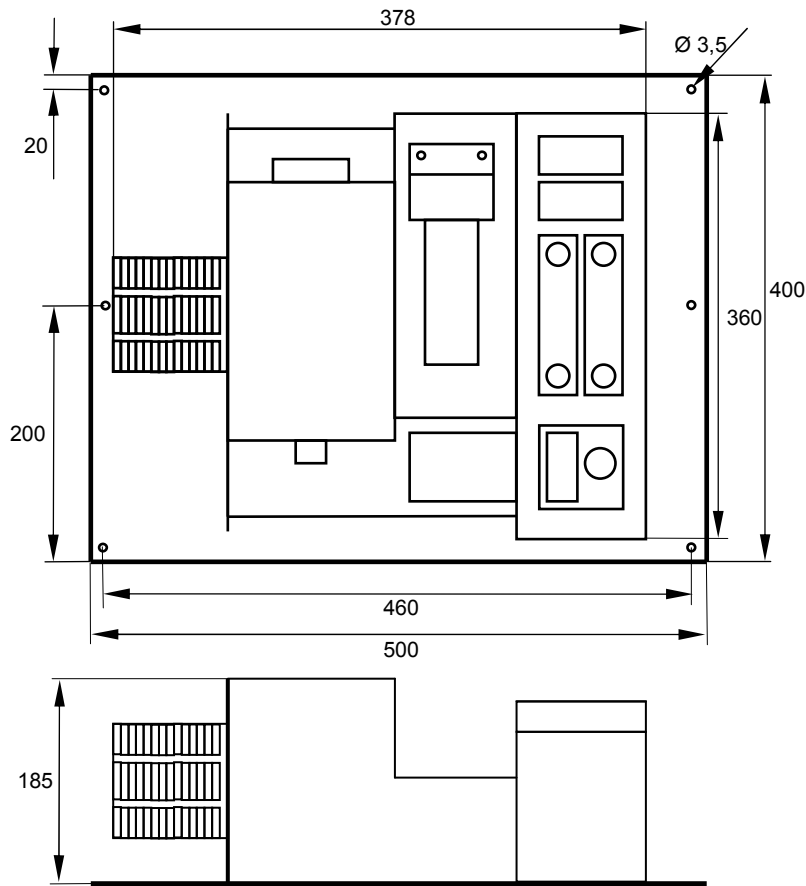



ANKERSMID Paramagnetic Oxygen Analyser

APA x00 Series

Application

The Ankersmid APA Series is a precise oxygen gauge for continuous monitoring purposes. The instrument is microprocessor controlled with self-diagnosis capability. With the programmable autocalibration function the APA Analyser is capable to fulfill a fully automatic calibration by means of the integrated relays. The measuring unit is temperature controlled to +55°C. The operation and parameterisation is carried out by means of a userfriendly 4 keys and a 16-digit LCD display and also new by a RS232 interface (USB or D-sub9).

The analyser is available in 3 versions:

- 19" rack-mount
- Portable
- Wall-mount

Description

The APA analysers are suitable and reliable instruments for monitoring oxygen concentrations in various gas analytical control applications including flue gas-, inert gas-, fermentation processes- and process or laboratory control measurements.

All analysers are temperature controlled instruments which have been designed for continuous measurements of oxygen concentrations in particle-free and dry sample gas.

The analysers are reliable and easy-to-operate instruments.

The measuring value and the sample flow through the measuring cell are displayed on the digital display.

2 alarm relays and 1 malfunction relay are available. Sample gas connections as well as connectors for incoming power supply, output signals are located at the rear panel of the analyser.

The sample gas enters the analyser passing a protective fine-filter which is installed in the front-panel (not for APA 200).

An atmospheric pressure sensor is implemented so that the actual absolute barometric pressure can be sent via RS232 and used for calculation or analysis purposes.



* Picture may vary

- **Maintenance-free and self-monitoring**
- **Modular housing system**
- **Modern micro-controller technology**
- **For process and ambient air Measurements**
- **calibration and parameter setting over RS 232**
- **Thermostated at +55°C**
- **Accurate and reliable**
- **16-Digit LCD-display with flow indication**
- **linear measuring ranges**
- **Physical measuring principle**
- **Small stagnant volume for fast response time**
- **Atmospheric pressure sensor**



ANKERSMID Paramagnetic Oxygen Analyser

Measuring principle


The APA analyser utilises the paramagnetic principle of operation to measure oxygen concentrations. The analyser measures the paramagnetic susceptibility of the oxygen in the sample gas by means of the patented magneto-dynamic measuring cell. The physical properties which distinguishes oxygen from other gases is its paramagnetism. It is significantly higher comparing to other common gases. This operation principle is one of the most accurate and reliable procedures to determine the oxygen concentration in a gas mixture from 0 to 100 Vol.%.

The robust cell has a small stagnant volume. Advantages are the fast response time, a low drift, the absolute linearity and the negligible cross sensitivity against other sample gas components. With a proper sample conditioning and pressure, the cell will never need replacing. The nitrogen-filled dumbbell with a small mirror at its centre is mounted in a strong inhomogenous magnetic field causes a shifting of the dumbbell which is detected by a system consisting of light beam, mirror and a photo cell.

A compensation current is induced via the feedback coil on the dumbbell and leads to a reset of the dumbbell into its zero-position. The required current is linearly proportional to the oxygen concentration.

When the surrounding gas contains oxygen, the dumb bell spheres are pushed out of the magnetic field. The torque acting on the dumb bell will be proportional to the para magnetism of the surrounding gas and consequently it can be used as a measure of the oxygen concentration.

- 1 Quarts sphere dumb bell
- 2 Platinum wire
- 3 Mirror
- 4 Magnetic pole pieces

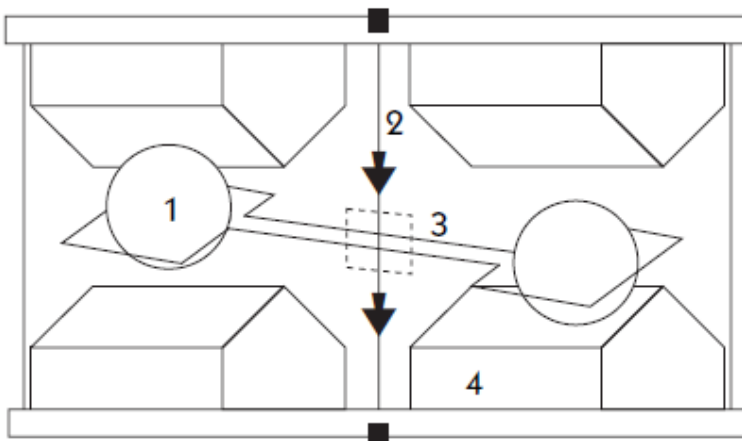



ANKERSMID
Paramagnetic Oxygen Analyser

Technical data

APA Oxygen analyser	APA 100	APA 200	APA 300
Measurement range	0-100%, freely settable by input of parameters		
Response time 90% (T90)	≤ 10 s (gas flow dependent)		
Measured value characteristic	linear		
Repeatability	≤ ± 0,03 % O ₂		
Zero point drift	≤ ± 0,05% O ₂ / week (offset)		
Sensitivity drift	< 0,5% of measured value per week		
Temperature influence	zero point < ± 0,01% O ₂ /°C Sensitivity < ± 0,025% of measured value /°C		
Detection limit	0,01% O ₂		
Air pressure effect	1% air pressure change causes 1% change in reading		
Background gas influence	slight (for guideline data see operating instructions)		
Display			
LCD digital multi-display	Indication of measured value: 999.9 %O ₂ ; Flow 99l/h Alarms, malfunction, parameters, total 16 digits		
Measured value, outputs			
Measurement signal	Selectable signal range 0 – 20mA or 4 – 20mA 500Ω max.		
Status output	2 alarm relays, 1 malfunction relay		
Output connection	Pump relay, maintenance, sample gas relay, zero gas relay, test gas relay		
Sample gas inlet conditions			
Gas temperature	+5°C to +45°C		
Gas pressure	max. 1000 hPa		
Gas flow	10 - 90 l/h (cell flow ca. 100 ml/min.)		
Gas pre-conditioning	necessary for humid and/or corrosive gases, pre-filter required		
Calibration			
2-point calibration	with gases as desired, menu-controlled, Time-controlled and fully automatic or manually		
Design			
Housing	19"-rack version	Portable version	Wall-mount version
Dimensions	19" 3HU	1/2 19" 3HU	380 x 380 x 210mm
Sample gas inlet	PVDF bulkhead tube connection DN4/6mm		
Sample gas outlet	PVDF bulkhead tube connection DN4/6mm		
Materials of gas wetted parts	PVDF, glass, SS316, gold, Viton [®] , platinum-iridium, epoxy resin, nickel		
Ambient conditions			
Ambient temperature	+5°C to +45°C		
Transport and storage temp.	-25°C to +65°C		
Relative humidity	≤ 75% of annual average		
Power supply			
Voltage	100 - 240VAC		
Optionals			
Features	pressure compensation, test gas pump, flow alarm unit		



ANKERSMID Online Infrared Analyzer ABYSS SynGas Series 100-800



* Picture may vary

Application

The general application is coal or biomass gasification or pyrolysis, coal chemical process, off-gas from steel and iron making process such as blast furnace, coking, converter, direct Iron ore smelting reduction as well as Endo & Exo gas generators for heating treating.

Description

The analyzers can be used for measurement of the concentration of up to 6 gases such as CO, CO₂, CH₄, C_nH_m, H₂ and O₂ components in sample gases simultaneously. It is based on the single source dual-beam non-dispersion infrared (NDIR) method for CO, CO₂, CH₄, C_nH_m and a micro-TCD (Thermal Conductivity Detector) gas sensor for H₂ and O₂ by fuel cell method. This analyzer is designed with a digital pulsable infrared source and dual-beam systems.

There is no effect of CO₂ and CH₄ on the H₂ detector as the H₂ reading is compensated for the interference effects of the other gases measured.

- **Up to 6 gases measurement with combination of NDIR, TCD and ECD gas sensor technology**
- **Simple construction with pulsable infrared source and dual-beam technology**
- **Constant temperature control for gas bench for high stability**
- **320*240 LCD display with menu operation**
- **Integrated flow meter with needle valve**
- **Automatic zero calibration**
- **Compensation of H₂ by CO, CO₂ and CH₄ sensor**

Version	Part number	Gas components
ABYSS SynGas 800	ASG 800	CO+CO ₂ +CH ₄ +H ₂ +O ₂ +C _n H _m +Calorie
ABYSS SynGas 700	ASG 700	CO+CO ₂ +CH ₄ +H ₂ +O ₂ +Calorie
ABYSS SynGas 600	ASG 600	CO+CO ₂ +CH ₄ +H ₂ +Calorie
ABYSS SynGas 500	ASG 500	CO+CO ₂ +CH ₄ +O ₂
ABYSS SynGas 400	ASG 400	CO+CO ₂ +O ₂
ABYSS SynGas 300	ASG 300	CO+CO ₂
ABYSS SynGas 200	ASG 200	CO+O ₂
ABYSS SynGas 100	ASG 100	CO/CO ₂ /H ₂ /CH ₄ (Single Gas %)



ANKERSMID Online Infrared Analyzer
ABYSS SynGas Series 100-800

Technical data

Specifications					
Measurement	CO, CO ₂ , CH ₄ , C _n H _m , O ₂ , H ₂ + BTU index (gas calorific value)				
Calculation	High heating value or low heating value in MJ/m ³ or kcal/m ³ N ₂ (Optional)				
Gas flow	0.7 - 1.2 l/min, external flow meter with needle valve				
Pressure of gas inlet	20 - 100mbar				
Sampling gas requirement	Remove water vapor, dust (<1um) and oil				
Response time	<15s (NDIR)				
Warm-up time	15min				
Interface	RS232 (real time and memory data download software included)				
Output	4 - 20mA (according to the requirement)				
Technology	CO, CO ₂ , CH ₄ , C _n H _m : proprietary dual-beam NDIR detectors O ₂ : industrial electrochemical cell H ₂ : proprietary thermal conductivity detector				
Display	LCD 320 x 240 with back-light function Simultaneous indication of the 7 measures and units Auto-zero function via keyboard interface				
Data logging	Up to 1500 sets of data; logging rate adjustable from 3 to 99 sec Possibility to identify 10 different sites and up to 100 measuring points				
Operating temperature	0 - 50°C				
Relative humidity	0 - 95%				
Ambient air pressure	86 - 108kPa				
Power supply	230V/50Hz				
Dimension	483mm x 373mm x 140mm (W x L x H)				
Weight	± 12Kg				
Gas	Method	Range	Resolution	Precision	Error
CO	NDIR	0-100%	0,01%	≤2% FS	≤2%
CO ₂	NDIR	0-50%	0,01%	≤2% FS	≤2%
CH ₄	NDIR	0-10%	0,01%	≤2% FS	≤2%
H ₂	TCD	0-50%	0,01%	≤3% FS	≤2%
O ₂	ECD	0-25%	0,01%	≤3% FS	≤2%
C _n H _m	NDIR	0-10%	0,01%	≤2% FS	≤2%
Note: Measurement range can be customized by the requirement without extra charge					



ANKERSMID Portable Infrared Analyzer
ABYSS SynGas Series 100P-800P



* Picture may vary

Application

The general application is coal or biomass gasification or pyrolysis, coal chemical process, off-gas from steel and iron making process such as blast furnace, coking, converter, direct Iron ore smelting reduction as well as Endo & Exo gas generators for heating treating.

Description

The ABYSS portable infrared SynGas analyzer is powered by Li-ion battery and can be used without AC power supply.

The analyzers can be used for measurement of the concentration of up to 6 gases such as CO, CO₂, CH₄, C_nH_m, H₂ and O₂ components in sample gases simultaneously. It is based on the single source dual-beam non-dispersion infrared (NDIR) method for CO, CO₂, CH₄, C_nH_m and a micro-TCD (Thermal Conductivity Detector) gas sensor for H₂ and O₂ by fuel cell method. This analyzer is designed with a digital pulsable infrared source and dual-beam systems.

A nylon carrying bag for analyzer and accessories is included as standard.

There is no effect of CO₂ and CH₄ on the H₂ detector as the H₂ reading is compensated for the interference effects of the other gases measured.

- **Up to 6 gases measurement with combination of NDIR, TCD and ECD gas sensor technology**
- **Simple construction with pulsable infrared source and dual-beam technology**
- **Constant temperature control for gas bench for high stability**
- **320*240 LCD display with menu operation**
- **Integrated flow meter with needle valve**
- **Automatic zero calibration**
- **Built-in sample pump**
- **Compensation of H₂ by CO, CO₂ and CH₄ sensor**

Version	Part number	Gas components
ABYSS SynGas 800P	ASG 800p	CO+CO ₂ +CH ₄ +H ₂ +O ₂ +C _n H _m +Calorie
ABYSS SynGas 700P	ASG 700p	CO+CO ₂ +CH ₄ +H ₂ +O ₂ +Calorie
ABYSS SynGas 600P	ASG 600p	CO+CO ₂ +CH ₄ +H ₂ +Calorie
ABYSS SynGas 500P	ASG 500p	CO+CO ₂ +CH ₄ +O ₂
ABYSS SynGas 400P	ASG 400p	CO+CO ₂ +O ₂
ABYSS SynGas 300P	ASG 300p	CO+CO ₂
ABYSS SynGas 200P	ASG 200p	CO+O ₂
ABYSS SynGas 100P	ASG 100p	CO/CO ₂ /H ₂ /CH ₄ (Single Gas %)



ANKERSMID Portable Infrared Analyzer
ABYSS SynGas Series 100P-800P

Technical data

Specifications					
Measurement	CO, CO ₂ , CH ₄ , C _n H _m , O ₂ , H ₂ + BTU index (gas calorific value)				
Calculation	High heating value or low heating value in MJ/m ³ or kcal/m ³ N ₂ (Optional)				
Gas flow	0.7 - 1.2 l/min, external flow meter with needle valve				
Pressure of gas inlet	20 - 100mbar				
Sampling gas requirement	Remove water vapor, dust (<1um) and oil				
Response time	<15s (NDIR)				
Warm-up time	15min				
Interface	RS232 (real time and memory data download software included)				
Output	4 - 20mA (according to the requirement)				
Technology	CO, CO ₂ , CH ₄ , C _n H _m : proprietary dual-beam NDIR detectors O ₂ : industrial electrochemical cell H ₂ : proprietary thermal conductivity detector				
Display	LCD 320 x 240 with back-light function Simultaneous indication of the 7 measures and units Auto-zero function via keyboard interface				
Data logging	Up to 1500 sets of data; logging rate adjustable from 3 to 99 sec Possibility to identify 10 different sites and up to 100 measuring points				
Operating temperature	0 - 50°C				
Relative humidity	0 - 95%				
Ambient air pressure	86 - 108kPa				
Power supply	External: 230V/50Hz Internal: with battery and charger; autonomy of > 4h with pump in operation				
Dimension	380mm x 380mm x 255mm (L x D x H)				
Weight	± 5Kg				
Gas	Method	Range	Resolution	Precision	Error
CO	NDIR	0-100%	0,01%	≤2% FS	≤2%
CO ₂	NDIR	0-50%	0,01%	≤2% FS	≤2%
CH ₄	NDIR	0-10%	0,01%	≤2% FS	≤2%
H ₂	TCD	0-50%	0,01%	≤3% FS	≤2%
O ₂	ECD	0-25%	0,01%	≤3% FS	≤2%
C _n H _m	NDIR	0-10%	0,01%	≤2% FS	≤2%
Note: Measurement range can be customized by the requirement without extra charge					



ANKERSMID Online Infrared Analyzer
ABYSS BioGas Series 100-700



* Picture may vary

Application

The general applications are Landfill, Flare and Biogas plants.

Description

The analyzers can be used for measurement of the concentration of up to 4 gases such as CO₂, CH₄, H₂S and O₂ components in sample gases simultaneously. It is based on the single source dual-beam non-dispersion infrared (NDIR) method for CO₂, CH₄ and the fuel cell method (ECD) for H₂S and O₂. This analyzer is designed with a digital pulsable infrared source and dual-beam systems.

- **Up to 4 gases measurement with combination of NDIR, fuel cell and ECD gas sensor technology**
- **Simple construction with pulsable infrared source and dual-beam technology**
- **Constant temperature control of gas bench for high stability**
- **320*240 LCD display with menu operation**
- **Integrated flow meter with needle valve**
- **Automatic zero calibration**

Version	Part number	Gas components
ABYSS BioGas 700	ABG 700	CO ₂ +CH ₄ +H ₂ S+O ₂
ABYSS BioGas 600	ABG 600	CO ₂ +CH ₄ +H ₂ S
ABYSS BioGas 500	ABG 500	CH ₄ +CO ₂ +O ₂
ABYSS BioGas 400	ABG 400	CH ₄ +CO ₂
ABYSS BioGas 300	ABG 300	CH ₄ +H ₂ S
ABYSS BioGas 200	ABG 200	CH ₄ +O ₂
ABYSS BioGas 100	ABG 100	CH ₄



ANKERSMID Online Infrared Analyzer

Technical data

ABYSS BioGas Series 100-700

Specifications					
Measurement	CO ₂ , CH ₄ , O ₂ , H ₂ S				
Calculation	High heating value or low heating value in MJ/m ³ or kcal/m ³				
Gas flow	0.7 - 1.2 l/min, external flow meter with needle valve				
Pressure of gas inlet	< 1bar				
Sampling gas requirement	Remove water vapor, dust (<1um) and oil				
Response time	<10s (NDIR)				
Warm-up time	15 min				
Interface	RS232 (real time and memory data download software included)				
Output	4 - 20mA (can be customized)				
Technology	CO ₂ , CH ₄ : proprietary dual-beam NDIR detectors H ₂ S: ECD O ₂ : galvanic fuel cell method				
Display	LCD 240 x 128 with back-light function Simultaneous indication of the 7 measures and units Programmable auto-zero function, incl. internal pump, relay and solenoid valve				
Data logging	Up to 1500 sets of data; logging rate adjustable from 3 to 99 sec Possibility to identify 10 different sites and up to 100 measuring points				
Operating temperature	0 to +50°C				
Relative humidity	5 - 85%				
Ambient air pressure	86 – 108kPa				
Power supply	230V/50Hz				
Dimension	483mm x 373mm x 140mm (W x L x H)				
Weight	± 12Kg				
Gas	Method	Range	Resolution	Precision	T90
CO ₂	NDIR	0-50%	0,1%	≤2% FS	<10s
CH ₄	NDIR	0-100%	0,1%	≤2% FS	<10s
H ₂ S	ECD	0-9999ppm	1ppm	≤3% FS	<30s
O ₂	Fuel cell	0-25%	0,01%	≤3% FS	≤2%
Note: Measurement range can be customized by the requirement without extra charge					



ANKERSMID Portable Infrared Analyzer
ABYSS BioGas Series 100P-700P



Application

The general application are Landfill, Flare and Biogas plants.

Description

The ABYSS portable infrared SynGas analyzer is powered by Li-ion battery and can be used without AC power supply.

The analyzers can be used for measurement of the concentration of up to 4 gases such as CO₂, CH₄, H₂S and O₂ components in sample gases simultaneously. It is based on the single source dual-beam non-dispersion infrared (NDIR) method for CO₂, CH₄ and the fuel cell method (ECD) for H₂S and O₂. This analyzer is designed with a digital pulsable infrared source and dual-beam systems.

A nylon carrying bag for analyzer and accessories is included as standard.

* Picture may vary

- **Up to 4 gases measurement with combination of NDIR, fuel cell and ECD gas sensor technology**
- **Simple construction with pulsable infrared source and dual-beam technology**
- **Constant temperature control of gas bench for high stability**
- **320*240 LCD display with menu operation**
- **Integrated flow meter with needle valve**
- **Automatic zero calibration**

Version	Part number	Gas components
ABYSS BioGas 700P	ABG 700P	CO ₂ +CH ₄ +H ₂ S+O ₂
ABYSS BioGas 600P	ABG 600P	CO ₂ +CH ₄ +H ₂ S
ABYSS BioGas 500P	ABG 500P	CH ₄ +CO ₂ +O ₂
ABYSS BioGas 400P	ABG 400P	CH ₄ +CO ₂
ABYSS BioGas 300P	ABG 300P	CH ₄ +H ₂ S
ABYSS BioGas 200P	ABG 200P	CH ₄ +O ₂
ABYSS BioGas 100P	ABG 100P	CH ₄



ANKERSMID Portable Infrared Analyzer
ABYSS BioGas Series 100P-700P

Technical data

Specifications					
Measurement	CO ₂ , CH ₄ , O ₂ , H ₂ S				
Calculation	High heating value or low heating value in MJ/m ³ or kcal/m ³				
Gas flow	0.7 - 1.2 l/min, external flow meter with needle valve				
Pressure of gas inlet	< 1bar				
Sampling gas requirement	Remove water vapor, dust (<1um) and oil				
Response time	<10s (NDIR)				
Warm-up time	15 min				
Interface	RS232 (real time and memory data download software included)				
Output	4 - 20mA (can be customized)				
Technology	CO ₂ , CH ₄ : proprietary dual-beam NDIR detectors H ₂ S: ECD O ₂ : galvanic fuel cell method				
Display	LCD 240 x 128 with back-light function Simultaneous indication of the 7 measures and units				
	Programmable auto-zero function, incl. internal pump, relay and solenoid valve				
Data logging	Up to 1500 sets of data; logging rate adjustable from 3 to 99 sec Possibility to identify 10 different sites and up to 100 measuring points				
Operating temperature	0 to +50°C				
Relative humidity	5 - 85%				
Ambient air pressure	86 – 108kPa				
Power supply	230V/50Hz Autonomy of > 4h with pump in operation				
Dimension	380mm x 140mm x 225mm (W x L x H)				
Weight	± 5Kg				
Gas	Method	Range	Resolution	Precision	T90
CO ₂	NDIR	0-50%	0,1%	≤2% FS	<10s
CH ₄	NDIR	0-100%	0,1%	≤2% FS	<10s
H ₂ S	ECD	0-9999ppm	1ppm	≤3% FS	<30s
O ₂	Fuel cell	0-25%	0,01%	≤3% FS	≤2%
Note: Measurement range can be customized by the requirement without extra charge					



ANKERSMID Online Infrared Analyzer
ABYSS FlueGas Series 100-900



* Picture may vary

Application

The general applications are Boiler (furnace exhaust emission gas and combustion efficiency monitoring), cement production line process and security as well as continuous emission monitoring systems (CEMS) of waste gas generated from pollution sources such as fire-coal smoke-stacks, steel works, cement plans, aluminium manufacturing factories, nonferrous metallurgy plants, phosphate fertilizer factories, nitric plants, sulphuric acid factories, petrochemical works, chemical fibre plants and large industrial chimney stacks.

Description

The analyzers can be used for the measurement of the concentration of up to 5 gases such as SO₂, NO, CO₂, CO and O₂.

The measurement is based on micro-flow detectors (NDIR) for SO₂, NO and CO (all in ppm ranges) as well as dual-beam detectors (NDIR) for CO₂ and CO (% range) and an Electro-chemical detector (ECD) for O₂ (%). Optional O₂ (%) could be also measured with a paramagnetic cell.

- **Measurement of up to 5 gases with combination of NDIR and ECD gas sensor technology**

Dual-beam NDIR technology

- **Constant temperature control of gas bench for high stability**
- **320*240 LCD display with menu operation**
- **Integrated flow meter with needle valve**
- **RS232 interface**
- **Automatic zero calibration**
- **2 freely configurable alarm levels per measuring channel**
- **NO₂ to NO converter for NO_x measurement (ppm range)**

Version	Part number	Gas components
ABYSS FlueGas 900	AFG 900	SO ₂ +NO+CO+CO ₂ +O ₂
ABYSS FlueGas 800	AFG 800	SO ₂ +NO+CO+O ₂
ABYSS FlueGas 700	AFG 700	SO ₂ +NO+O ₂
ABYSS FlueGas 600	AFG 600	SO ₂ +NO
ABYSS FlueGas 500	AFG 500	SO ₂ +O ₂ (NO+O ₂)
ABYSS FlueGas 400	AFG 400	SO ₂ (NO)
ABYSS FlueGas 300	AFG 300	CO+CO ₂ +O ₂ combustion efficiency
ABYSS FlueGas 200	AFG 200	CO+O ₂
ABYSS FlueGas 100	AFG 100	CO (ppm content)



ANKERSMID Online Infrared Analyzer ABYSS FlueGas Series 100-900

Technical data

Specifications						
Measurement	SO ₂ , NO, CO ₂ , CO and O ₂					
Gas flow	0.7 - 1.2 l/min, external flow meter with needle valve, (internal flow regulator 100ml/min for paramagnetic O ₂ detector) external pump is recommended					
Pressure of gas inlet	< 1bar					
Sampling gas requirement	Remove water vapor, dust (<1um) and oil					
Response time T90	<10s (NDIR-TCD) <2s (PMG) <15s ECD (O ₂)					
Warm-up time	30min (NDIR) for full performances <1h (PMG) for full performances					
Interface	RS232 (real time and memory data download software included)					
Output	4 - 20mA per measuring channel					
Digital	3 common relays for default, low and high gas alarms					
Gas alarm levels	2 levels (low/high) per channel, configurable by software					
Configuration/calibration	By software, via key pad on front panel 5 points factory calibration per measuring channel, stored in the memory 2 points (Zero/Span) user calibration					
Display	LCD 240*320 with back-light function Simultaneous indication of the measures and units					
	Programmable auto-zero function, relay and solenoid valve					
Data logging	Up to 1500 sets of data; logging rate adjustable from 3-99sec Possibility to identify 10 different sites and up to 100 measuring points					
Operating temperature	0 to +50°C					
Relative humidity	5 - 85%					
Ambient air pressure	86 – 108kPa					
Power supply	230V/50Hz (115V/60Hz on request)					
Dimension	19"-3U rack enclosure, 485mm x 457mm x 132mm (W x L x H)					
Weight	± 11Kg					
Gas	Method	Range max	Display resolution		Full scale accuracy	T90
CO ₂	NDIR (dual-beam)	0-100%	0,01%	0,1%	±2%	<10s
CO	NDIR (dual-beam)	0-100%	0,001%	0,1%	±2%	<10s
CO	NDIR (mirco-flow)	0-5000ppm	1ppm		±1%	<10s
SO ₂	NDIR (mirco-flow)	0-5000ppm	1ppm		±1%	<10s
NO	NDIR (mirco-flow)	0-5000ppm	1ppm		±1%	<10s
O ₂	Electro-chemical	0-100%	0,01%	0,1%	±2%	<15s
O ₂	Paramagnetic (optional)	0-100%	0,001%	0,1%	±2%	<2s
NO _x	Catalytic converter, efficiency >95%	0-5000ppm	1ppm		±2%	<10s

Note: Measurement range can be customized by the requirement without extra charge



ANKERSMID Online Infrared Analyzer ABYSS FlueGas Series 100P-900P



* Picture may vary

Application

The general applications are Boiler (furnace exhaust emission gas and combustion efficiency monitoring), cement production line process and security as well as continuous emission monitoring systems (CEMS) of waste gas generated from pollution sources such as fire-coal smoke-stacks, steel works, cement plants, aluminium manufacturing factories, nonferrous metallurgy plants, phosphate fertilizer factories, nitric plants, sulphuric acid factories, petrochemical works, chemical fibre plants and large industrial chimney stacks.

Description

The ABYSS portable infrared FlueGas analyzer is powered by Li-ion battery and can be used without AC power supply.

A nylon carrying bag for analyzer and accessories is included as standard.

The analyzers can be used for the measurement of the concentration of up to 5 gases such as SO₂, NO, CO₂, CO and O₂.

The measurement is based on micro-flow detectors (NDIR) for SO₂, NO and CO (all in ppm ranges) as well as dual-beam detectors (NDIR) for CO₂ and CO (% range) and an Electro-chemical detector (ECD) for O₂ (%). Optional O₂ (%) could be also measured with a paramagnetic cell.

- **Measurement of up to 5 gases with combination of NDIR and ECD gas sensor technology**
- **Dual-beam NDIR technology**
- **Constant temperature control of gas bench for high stability**
- **320*240 LCD display with menu operation**
- **Integrated flow meter with needle valve**
- **RS232 interface**
- **Automatic zero calibration**
- **Built-in sampling pump**

Version	Part number	Gas components
ABYSS FlueGas 900P	AFG 900p	SO ₂ +NO+CO+CO ₂ +O ₂
ABYSS FlueGas 800P	AFG 800p	SO ₂ +NO+CO+O ₂
ABYSS FlueGas 700P	AFG 700p	SO ₂ +NO+O ₂
ABYSS FlueGas 600P	AFG 600p	SO ₂ +NO
ABYSS FlueGas 500P	AFG 500p	SO ₂ +O ₂ (NO+O ₂)
ABYSS FlueGas 400P	AFG 400p	SO ₂ (NO)
ABYSS FlueGas 300P	AFG 300p	CO+CO ₂ +O ₂ combustion efficiency
ABYSS FlueGas 200P	AFG 200p	CO+O ₂
ABYSS FlueGas 100P	AFG 100p	CO (ppm content)



ANKERSMID Portable Infrared Analyzer

Technical data

ABYSS FlueGas Series 100P-900P

Specifications						
Measurement	SO ₂ , NO, CO ₂ , CO and O ₂					
Gas flow	0.7 - 1.2 l/min, external flow meter with needle valve, (internal flow regulator 100ml/min for paramagnetic O ₂ detector) external pump is recommended					
Pressure of gas inlet	< 1bar					
Sampling gas requirement	Remove water vapor, dust (<1um) and oil					
Response time T90	<10s (NDIR-TCD) <2s (PMG) <15s ECD (O ₂)					
Warm-up time	30min (NDIR) for full performances <1h (PMG) for full performances					
Interface	RS232 (real time and memory data download software included)					
Output	4 - 20mA per measuring channel					
Digital	3 common relays for default, low and high gas alarms					
Gas alarm levels	2 levels (low/high) per channel, configurable by software					
Configuration/calibration	By software, via key pad on front panel 5 points factory calibration per measuring channel, stored in the memory 2 points (Zero/Span) user calibration					
Display	LCD 240*320 with back-light function Simultaneous indication of the measures and units Programmable auto-zero function, , relay and solenoid valve					
Data logging	Up to 1500 sets of data; logging rate adjustable from 3-99sec Possibility to identify 10 different sites and up to 100 measuring points					
Operating temperature	0 to +50°C					
Relative humidity	5 - 85%					
Ambient air pressure	86 – 108kPa					
Power supply	External: 230V/50Hz Internal: with battery and charger; autonomy of > 4h with pump in operation					
Dimension	380mm x 380mm x 255mm (L x D x H)					
Weight	± 5Kg					
Gas	Method	Range max	Display resolution		Full scale accuracy	T90
			min	max		
CO ₂	NDIR (dual-beam)	0-100%	0,01%	0,1%	±2%	<10s
CO	NDIR (dual-beam)	0-100%	0,001%	0,1%	±2%	<10s
CO	NDIR (mirco-flow)	0-5000ppm	1ppm		±1%	<10s
SO ₂	NDIR (mirco-flow)	0-5000ppm	1ppm		±1%	<10s
NO	NDIR (mirco-flow)	0-5000ppm	1ppm		±1%	<10s
O ₂	Electro-chemical	0-100%	0,01%	0,1%	±2%	<15s
O ₂	Paramagnetic (optional)	0-100%	0,001%	0,1%	±2%	<2s
Note: Measurement range can be customized by the requirement without extra charge						