

# HALO QRP Trace-Level Low-Pressure Moisture Analyzer

GASES & CHEMICALS CEMS ENERGY ATMOSPHERIC SEMI & HB LED SYNGAS LAB & LIFE SCIENCE

### Designed for trace level moisture analysis in low pressure (<50 Torr) applications, the HALO QRP offers:

- Moisture detection at partial pressure of 1 μTorr and below
- Absolute accuracy and excellent precision
- Wide dynamic range—over four orders of magnitude
- Low cost of ownership and operational simplicity
- Clean technology—no external calibration gases required
- Compact analyzer footprint, also available as OEM module for equipment/system integration

## **Protect Your Process with the HALO QRP**

Modern semiconductor deposition processes—from low-temperature epitaxy to MOCVD—operate routinely at chamber pressures far below atmosphere and approach the single-digit torr range. At the same time, process temperatures are continuously decreasing. Under these conditions, residual moisture in the chamber poses a significant threat to process quality and production yields.

Tiger Optics' new HALO QRP is optimized to operate under these low-pressure conditions and deliver

exact and reliable real-time measurement to verify moisture residue in, for example, the load lock, transfer and process chambers before H<sub>2</sub>O contaminants compromise the subsequent process step. Based on Tiger Optics' proven Continuous-Wave Cavity Ring-Down Spectroscopy (CW-CRDS) technology, the HALO QRP sets new standards in ease-of-use and measurement precision for this application, and operates at chamber pressures as low as 1 Torr.



## **HALO QRP**

## Trace-Level Low-Pressure Moisture Analyzer




Performance, H <sub>2</sub> O Detection	
Operating range	0 – 12 mTorr <sub>pp</sub>
	(1200 ppm @ 10 Torr)
Detection limit (LDL,	1 μTorr <sub>pp</sub>
24 h peak-to-peak variation)	(see chart below for ppb units)
Sensitivity (3σ)	0.7 μTorr <sub>pp</sub>
	(see chart below for ppb units)
Precision (1 $\sigma$ , greater of)	± 1% or 1/3 of Sensitivity
Accuracy (greater of)	± 5% or 1/2 of LDL
Speed of response	1 to 2 min (if not flow-limited)
Environmental conditions	10°C to 40°C
	30% to 80% RH (non-condensing)
Storage temperature	-10°C to 50°C
Storage temperature	-10 C to 30 C

Gas Handling System and Conditions*	
Wetted materials	316L stainless steel
	(optional Hastelloy®)
	10 Ra surface finish
Gas connections	1/4" male VCR inlet and outlet
	with manual shut-off valves
Leak tested to	$1 \times 10^{-9}$ mbar l / sec
Inlet pressure <sup>†</sup>	1 – 100 Torr (standard)
	1 – 1000 Torr (optional)
Outlet pressure	<20 mTorr (0.027 mbar)
Sample gases§	N <sub>2</sub> , H <sub>2</sub> , He, HCl, and Cl <sub>2</sub>
Gas temperature	Up to 60°C (in detection cell)

<sup>\*</sup>Vacuum source required

Contact us for additional analytes and matrices. U.S. Patent # 7,277,177

Dimensions	H x W x D [in (mm)]
Standard sensor	8.73 x 8.57 x 23.6 (222 x 218 x 599)
Sensor rack	8.73 x 19.0 x 23.6 (222 x 483 x 599)
(fits up to two sensors)	
Weight	
Standard sensor	30 lbs (13.6 kg)
Electrical	
Alarm indicators	2 user programmable
	1 system fault
	1 system fault Form C relays
Power requirements	•
Power requirements Power consumption	Form C relays
·	Form C relays 90 – 240 VAC, 50/60 Hz
Power consumption	Form C relays 90 – 240 VAC, 50/60 Hz 40 Watts max.
Power consumption Signal output	Form C relays 90 – 240 VAC, 50/60 Hz 40 Watts max. Isolated 4–20 mA per sensor
Power consumption Signal output	Form C relays  90 – 240 VAC, 50/60 Hz  40 Watts max.  Isolated 4–20 mA per sensor  5.7" LCD touchscreen
Power consumption Signal output	Form C relays  90 – 240 VAC, 50/60 Hz  40 Watts max.  Isolated 4–20 mA per sensor  5.7" LCD touchscreen  (display-less version optional)

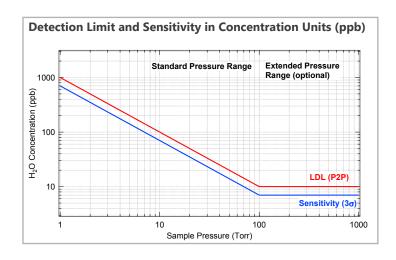

#### **Tiger Optics, LLC**

250 Titus Avenue, Warrington, PA 18976 Phone: +1 (215) 343 6600 • Fax: +1 (215) 343 4194 sales@tigeroptics.com • www.tigeroptics.com



<sup>&</sup>lt;sup>†</sup>Pressure requirements for moisture measurement – for gas purge in standby mode, inlet pressure limit is 15 psig (1500 Torr) <sup>§</sup>HCl and Cl<sub>2</sub> sample gases may require Hastelloy<sup>®</sup> cell, please contact us for more information.